
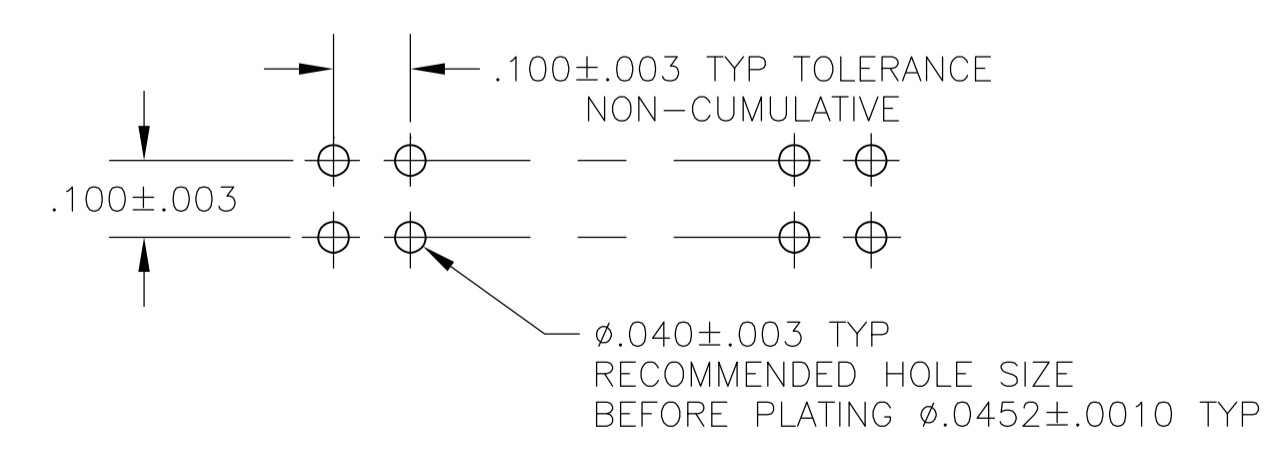


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 4 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 5 FOR 2 POSITION PART ONLY, THE NOTED DIM. IS .184.
- 6  $\text{M} \text{ } \phi .020$  FOR KINKED TAILS.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

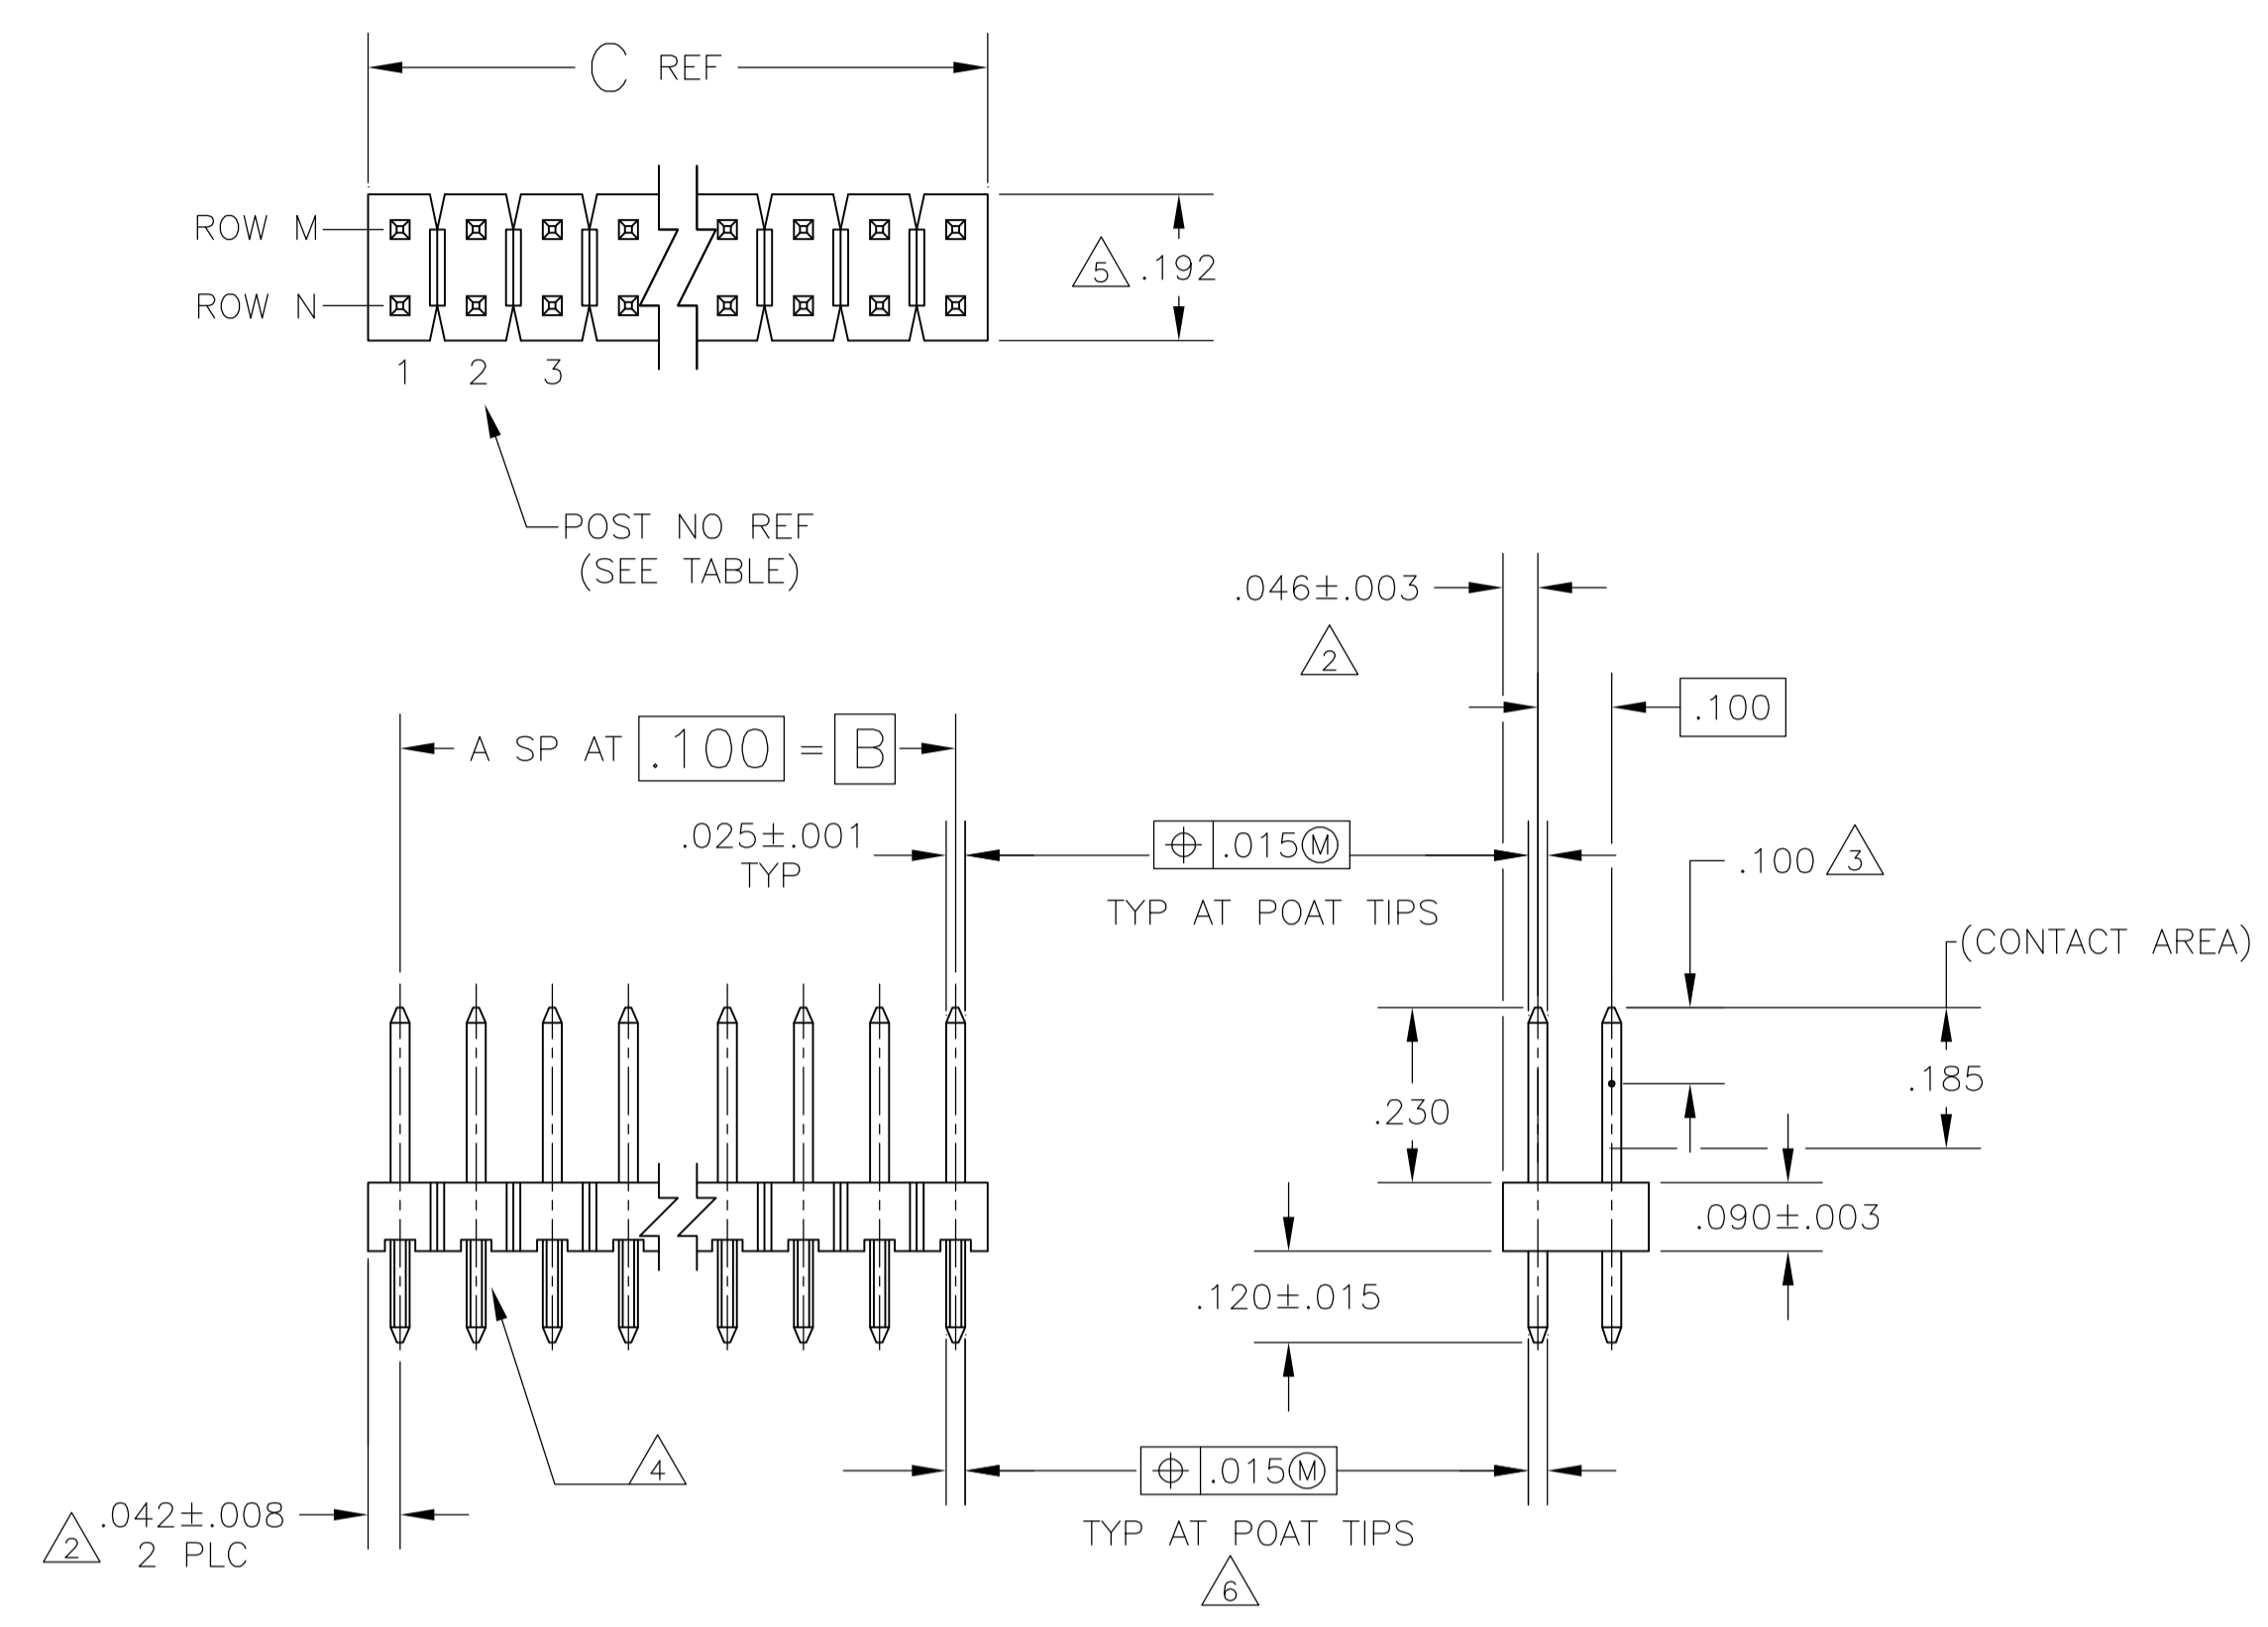

RECOMMENDED HOLE LAYOUT

7	OBSOLETE	3.084	3.000	30	62	2-104350-1
		3.984	3.900	39	80	2-104350-0
7	OBSOLETE	2.984	2.900	29	60	1-104350-9
		2.484	2.400	24	50	1-104350-8
7	OBSOLETE	1.984	1.900	19	40	1-104350-7
		1.684	1.600	16	34	1-104350-6
SUPERSEDED BY 6-146269-5		1.484	1.400	14	30	1-104350-5
7	OBSOLETE	1.384	1.300	13	28	1-104350-4
		1.284	1.200	12	26	1-104350-3
7	OBSOLETE	1.184	1.100	11	24	1-104350-2
		1.084	1.000	10	22	1-104350-1
7	OBSOLETE	.984	.900	9	20	1-104350-0
		.884	.800	8	18	104350-9
7	OBSOLETE	.784	.700	7	16	104350-8
		.684	.600	6	14	104350-7
7	OBSOLETE	.584	.500	5	12	104350-6
		.484	.400	4	10	104350-5
7	OBSOLETE	.384	.300	3	8	104350-4
		.284	.200	2	6	104350-3
7	OBSOLETE	.184	.100	1	4	104350-2
		.084	—	—	2	104350-1
		C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -
MATERIAL: HOUSING FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POST: COPPER ALLOY	FINISH: POST: 000008 GOLD IN CONTACT AREA 000100-000050 WHITE TIN-LEAD OR SOLDER TAIL, ALL OVER 000050 NICKEL	WEIGHT: -	SIZE: A1	SCALE: 4:1	CAGE CODE: -	DRAWING NO: 104350	RESTRICTED TO: -

CUSTOMER DRAWING

STE TE Connectivity

NAME: HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100X.100 CL., VERT, .025 SQ POSTS, WITH RETENTION FEATURE

SHEET 1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104350-3](#)