

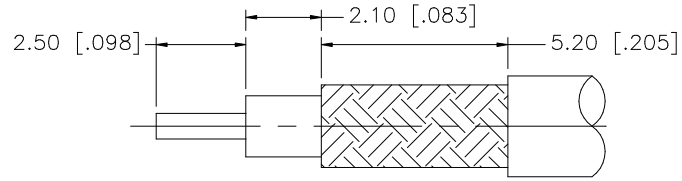
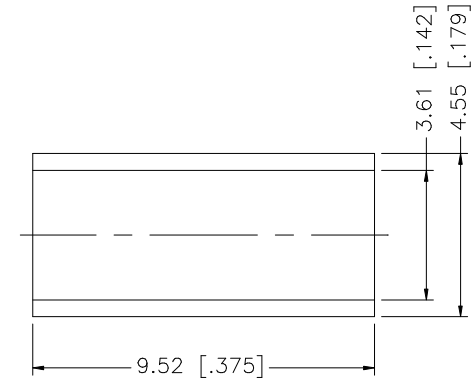


REV.	DATE	DESCRIPTION
A	11/31/01	MODIFY CONTACT PIN
B	10/31/05	UPDATE DRAWING FORMAT, MODIFY CRIMP NOTES
C	02/15/07	REVISE CONTACT PIN AND FERRULE DIMENSIONS

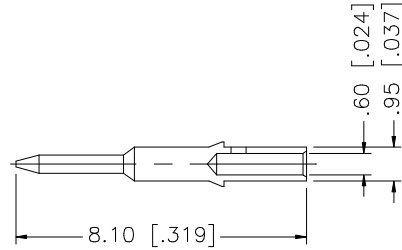

RECOMMENDED CABLE
STRIPPING DIMENSIONS

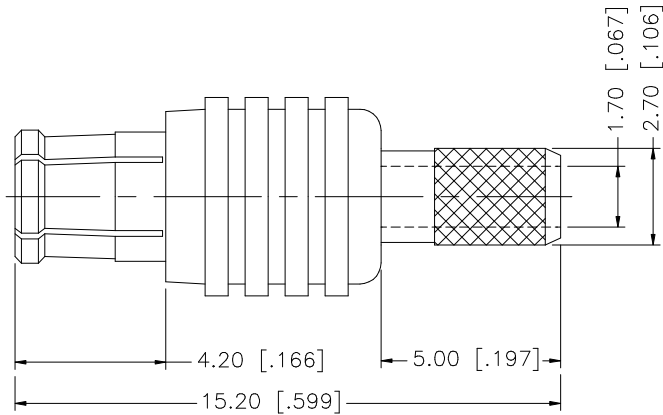

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .151"
 2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7(mm)

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
7						DRAWN	G.R.S.					02/15/07			
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION MCX STRAIGHT CRIMP PLUG – GOLD (FOR RG-3179/U DOUBLE BRAID)							
5	FERRULE	COPPER	GOLD	1		ISSUED									
4	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO. 252121–75							
3	INSULATOR	TEFLON	NATURAL	2		CAD FILE									
2	BODY	BER. COPPER	GOLD	1		C:/252/252121–75.DWG		DWG. NO.	252121–75.DWG	REV.	C	SIZE	A	SCALE	NA
1	HOUSING	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[252121-75](#)