
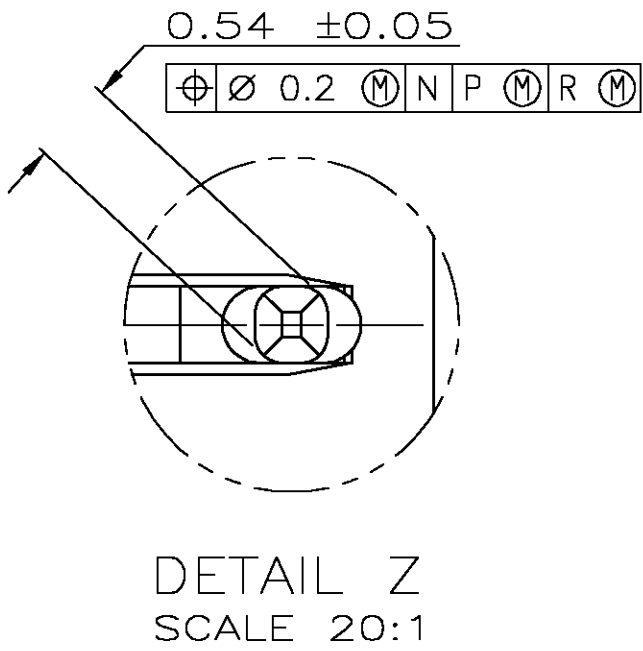
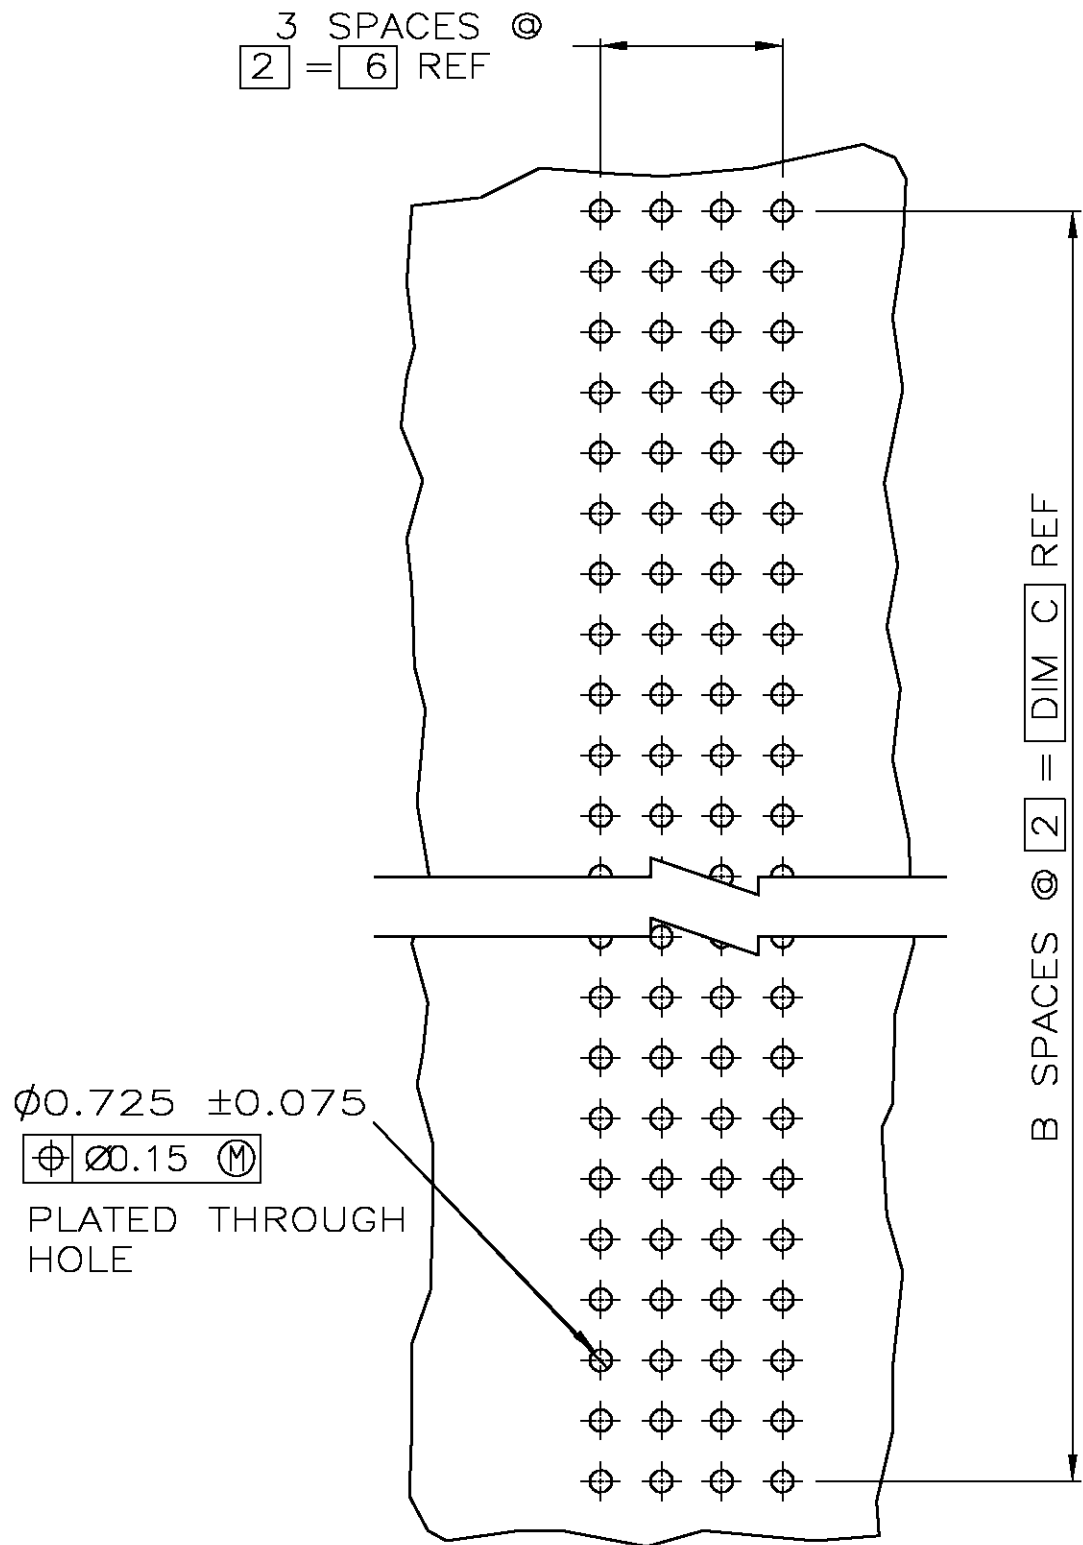
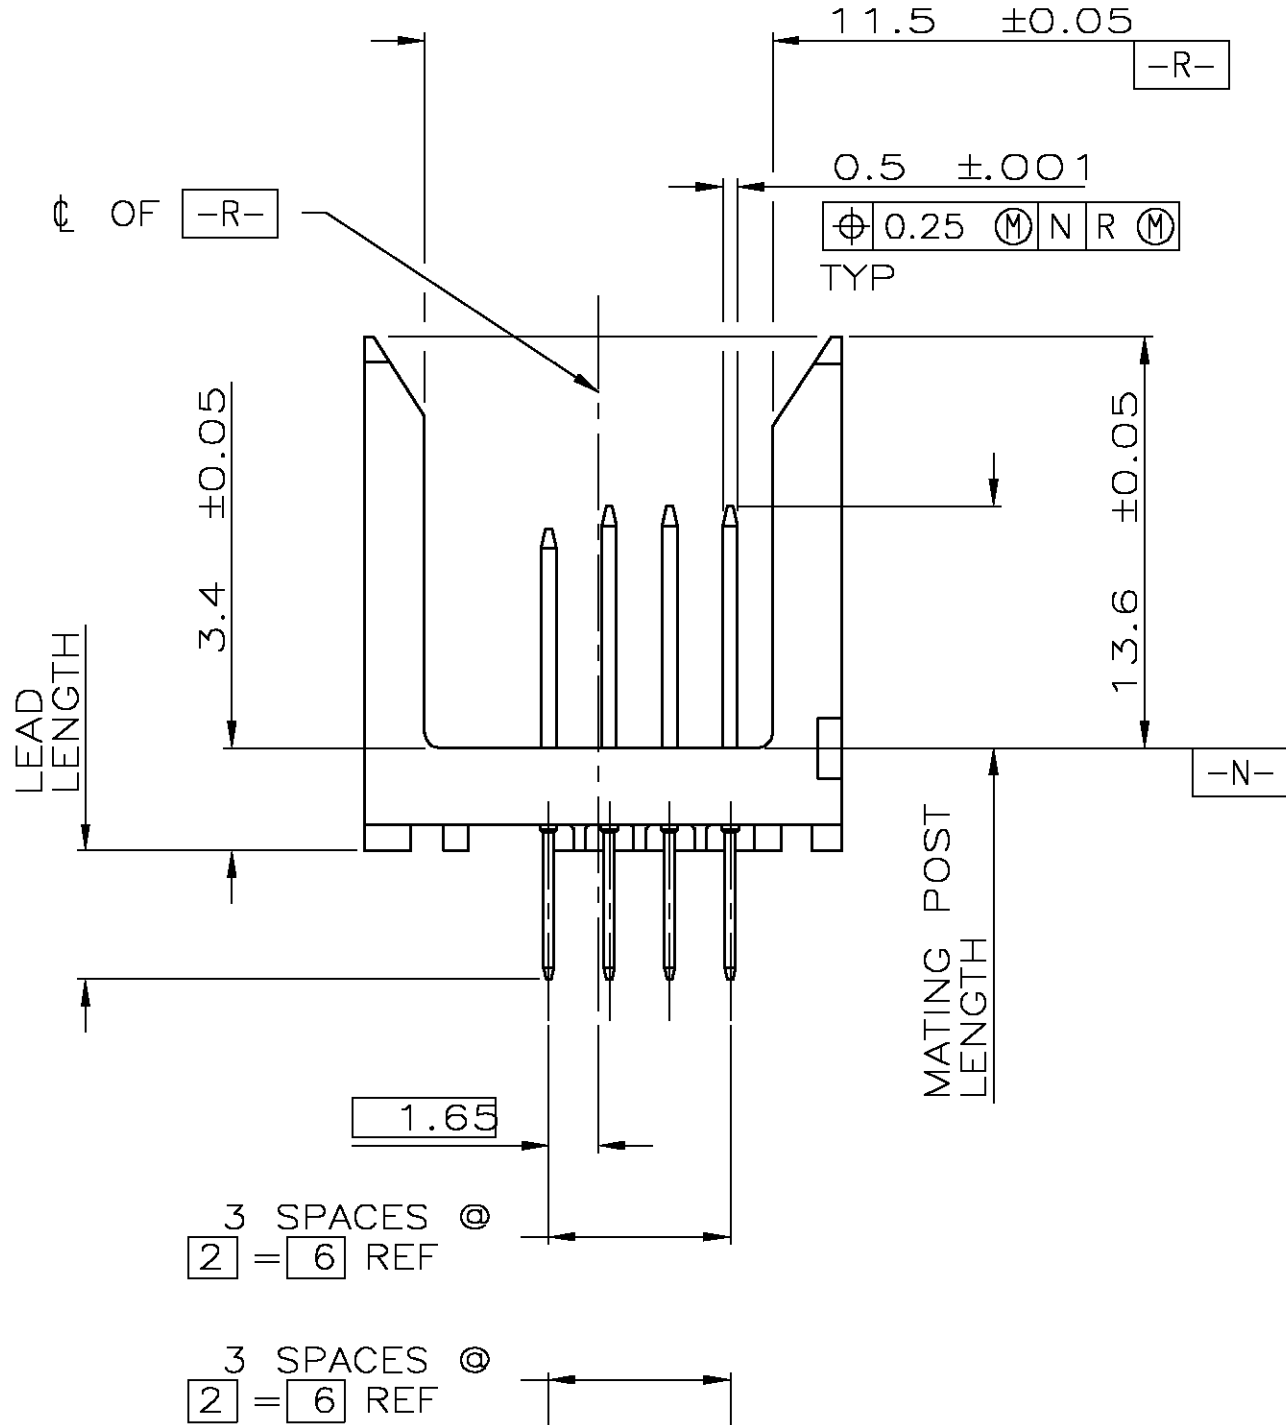
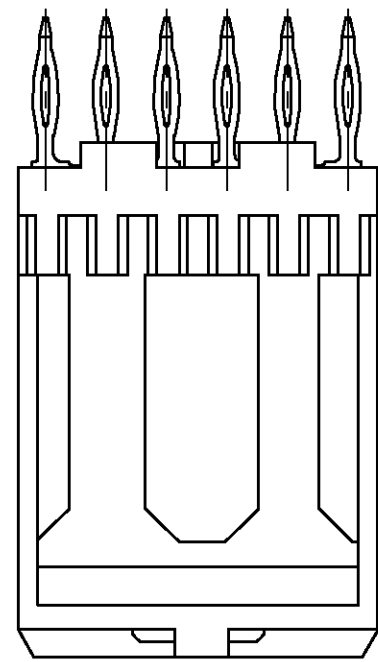
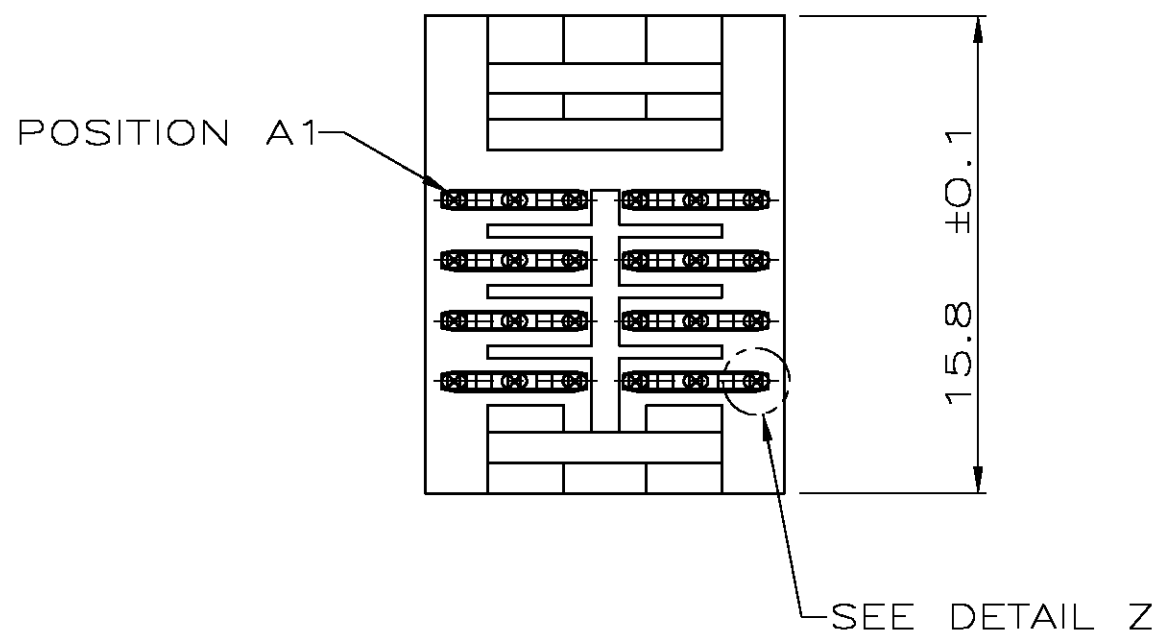
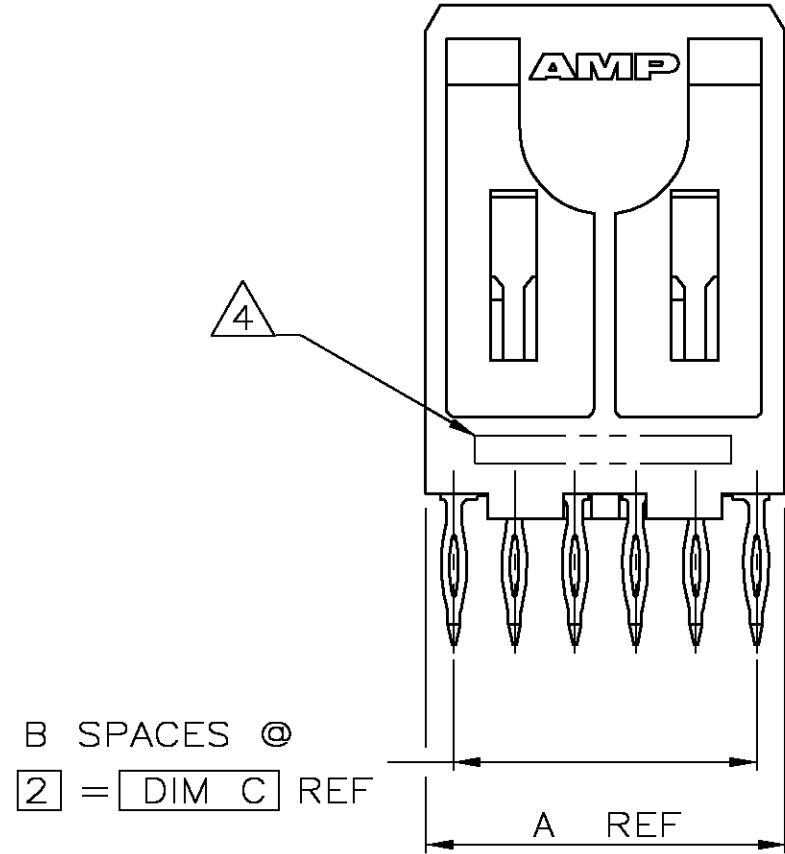


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
AD	00	O		RELEASED PER EC 0512-0235-04	06OCT04	BM

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, COLOR: NATURAL.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE PER UNS ALLOY NO. C51100, TEMPER: H04.
- 3 CONTACT FINISH:(D)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
FLASH GOLD PER ASTM B 488, OVER
0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
ON LEADS:
0.00127 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- 4 PART MARKING LOCATED APPROXIMATELY AS SHOWN.

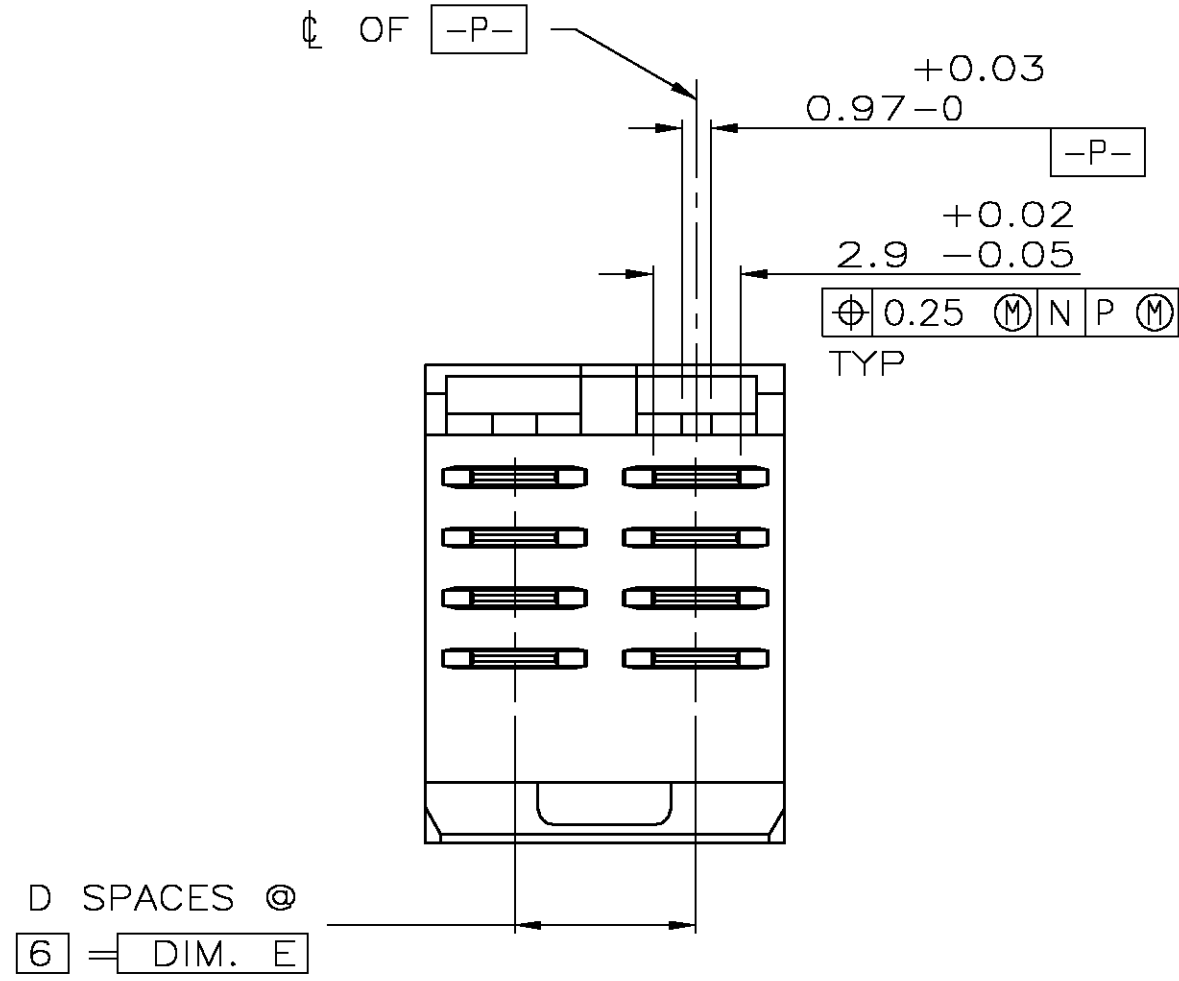

ROW	D	AB			AC	
	C	AB			AC	
	B	AC			AC	
	A	AB			AB	
1 2 3 4 5 6						
POWER						
POSITION						
5536626-1						

ROW	D	AC			AC	
	C	AB			AB	
	B	AB			AB	
	A	AC			AC	
1 2 3 4 5 6						
POWER						
POSITION						
5536626-2						

CODE LETTER	MATING POST LENGTH ± 0.1	LEAD LENGTH (REF)
AC	8	4.25
AB	7.25	4.25

6	1	10	5	11.88	3	8	5536626-2
6	1	10	5	11.88	3	8	5536626-1
E	D	C	B	A	FINISH	NO OF POWER POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC $\pm$ -
1 PLC $\pm$ -
2 PLC $\pm$ 0.13[.005]
3 PLC $\pm$ -
4 PLC $\pm$ -
ANGLES $\pm$ -
FINISH

APPROVED: R. BUCHHEISTER 01/JUN/95
CHK: J. SMALLLEY 10/AUG/95
PRODUCT SPEC: D.R. BAECHTLE 10/AUG/95
APPLICATION SPEC: -
MATERIAL: -
WEIGHT: -

TYCO Electronics

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME: ASSEMBLY, PIN, POWER, VERTICAL,
Z-PACK 2mm FB, 4 ROW,
PRESS FIT LEADS, RANDOM SEQUENCED

SIZE: A1
CAGE CODE: 00779
DRAWING NO: C=5536626
RESTRICTED TO: -

CUSTOMER DRAWING

SCALE: 4:1
SHEET: 1 OF 1
REV: Q

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5536626-2](#)