



Features

- RoHS compliant* versions available
- Overvoltage/lightning protection to ITU-T K.20
- Standard “off-the-shelf” design
- Typical application is secondary protection on telecom line cards

4B08B-503-RC - Surge Line Protection Module

Electrical Characteristics

Resistance Values (R1 = R2)	50 & 100 Ω
Resistance Tolerance	±2 %
TCR	100 ppm/°C
Ratio Tolerance	±1 %
Power Dissipation (per resistor) @ 25 °C	2 W
Temperature Range	-55 °C to +125 °C

Environmental Characteristics

Tests per MIL-STD-202	Δ R max.
Resistance to Solvents	No marking deterioration
Resistance to Solder Heat	± 0.5 Ω
Solderability	>95 % Coverage
Insulation Resistance	10 MΩ min. (isolated pins)
Bias Humidity Test	50 V / 85 % RH / 85 °C


Physical Characteristics

Body Style	Open Frame SIP
Substrate Material	96 % Alumina
Lead Frame Material	Copper, solder coated
Flammability	Conforms to UL94V-0


Functional Characteristics

Lightning Surge Test	10 x 700 μSec, 1 KV
Power Induction	300 Vrms
Power Contact	220 Vrms

Product Dimensions

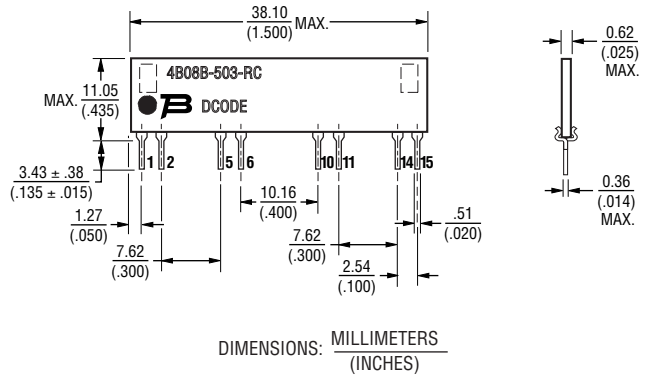

Electrical Schematic

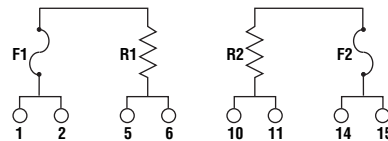

How To Order

4B 08 B - 503 - XXX LF

Model _____
 (4B = Open Frame)

Number of Pins _____

Physical Configuration _____

Electrical Configuration _____
 503 = Matched pair of resistors plus thermal fuse

Resistance Code _____
 • 500 = 50 Ω
 • 101 = 100 Ω

RoHS Compliant Option _____
 Blank = Standard Product
 LF = RoHS Compliant Product



Asia-Pacific:

TEL +886- (0)2 25624117
 FAX +886- (0)2 25624116

Europe:

TEL +41-41 7685555
 FAX +41-41 7685510

The Americas:

TEL +1-951 781-5500
 FAX +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.
 Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[4B08B-503-500](#)