
DESCRIPTION: 15 POS MICRO-D FEMALE (ASSEMBLED) TO BLUNT CUT

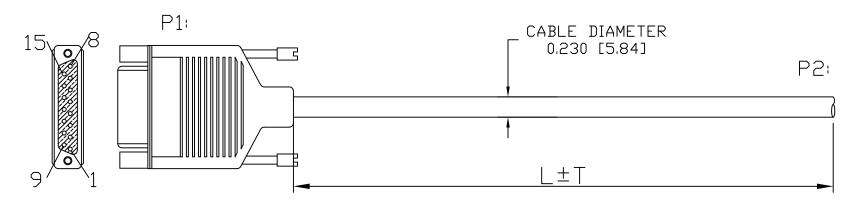

- 1. P1. CONNECTOR: NORCOMP MICRO D 15S, ASSEMBLED HODD W/THUMBSCREWS
- 2. P2. BLUNT CUT END
- 3. WIRE: 28AWG [7X36] x15C +ALUMINUM FOIL W/BRAID 65%, UL2464, COLOR BLACK
- 4. PINOUT:

P1		P2
1		BLACK
5		— BRПWN
۲		
3		RED
4		——□RANGE
5		——YELL□W
6		GREEN
7		—BLUF
8		
9		*
_		
10		AA I II I I
11	-	PINK
12		LIGHT GREEN
13		BLACK WHITE
14		BROWN WHITE
15		RED WHITE
SHELL	-	SHIELD

PACKAGED: 1 PER BAG

P/N	L±T
CCA-015-F18R152	216±2.952in
CCA-015-F28R152	336±3,952in
CCA-015-I18R152	18±0.590in
CCA-015-I36R152	36±0.787in
CCA-015-I72R152	72±0.984in
CCA-015-M.5R152	500±15mm
CCA-015-M01R152	1000±20mm
CCA-015-M02R152	2000±25mm
CCA-015-M15R152	15000±100mm
CCA-015-M20R152	20000±150mm
CCA-015-M30R152	30000±250mm

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
P. JENKINS
DATE:
01/18/2012

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET	1	OF	1	REV 4
DWG NO.	CCA-	01	5-Y	YYR152	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

CCA-015-M01R152 CCA-015-M02R152 CCA-015-M.5R152