
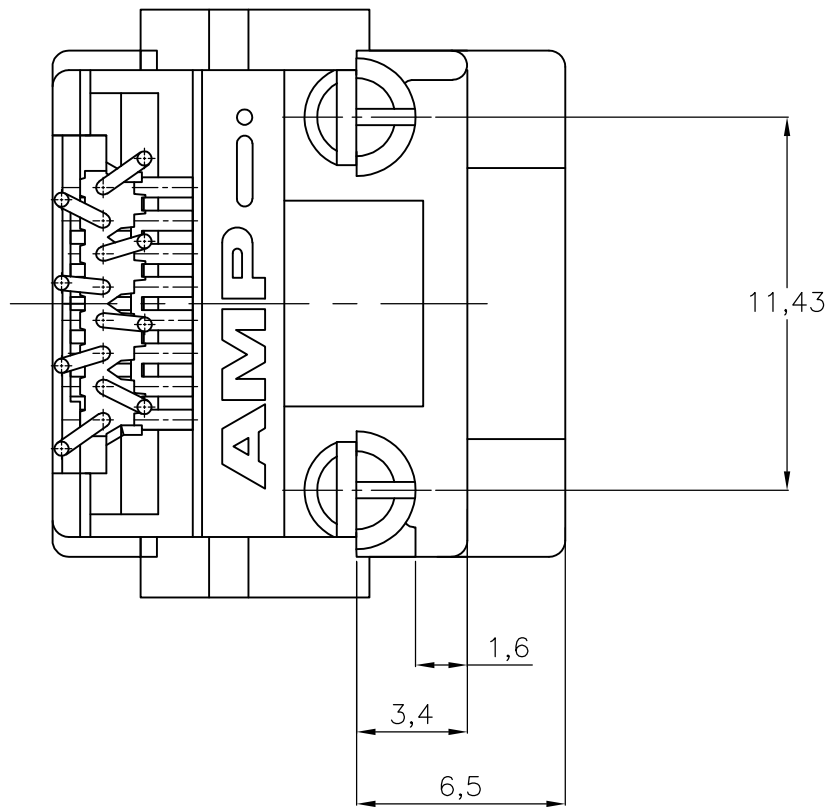
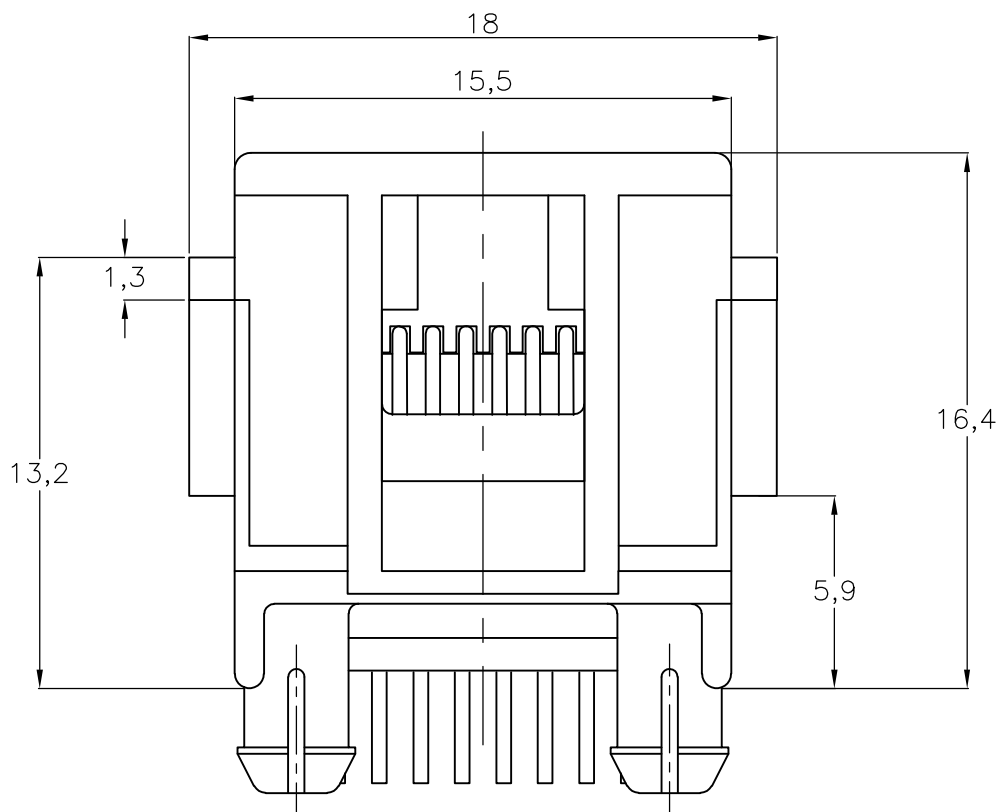
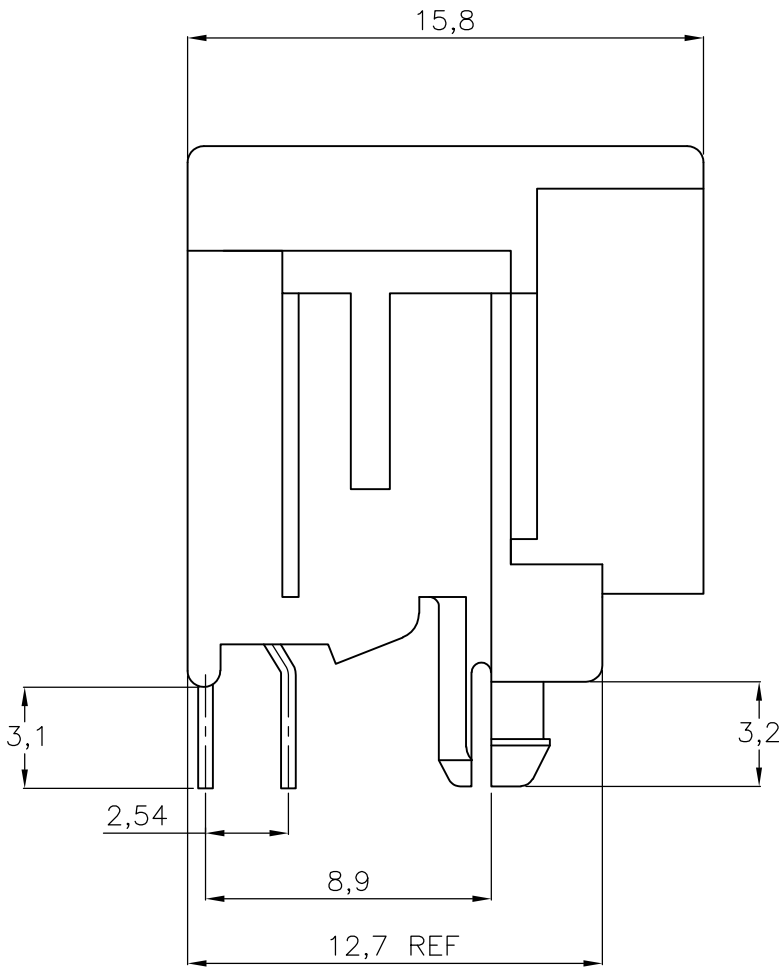


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	—		N2	ECR—11—025628	20DEC2011	PS	—


NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED:±0,15
2. FOR APPLICATION INFORMATION SEE TE SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE TE SPEC. 108-19064

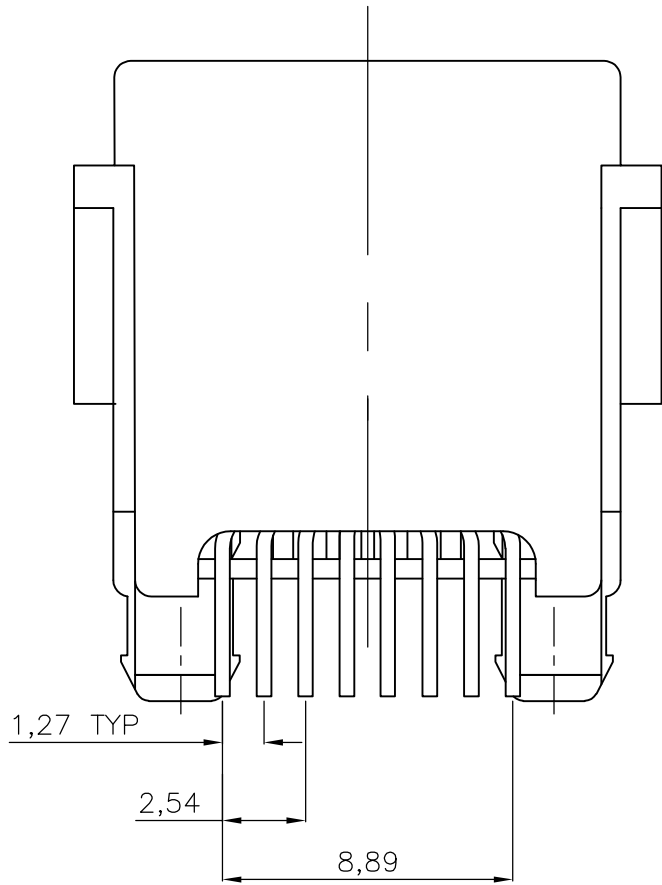

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P.BEIJNON 19JUN90	TE Connectivity			
DIMENSIONS: mm		CHK C.A.STERKEN				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L.V.SOEST	NAME			
		PRODUCT SPEC	MODULAR JACK 8 POS. TOP ENTRY WITH PANEL STOPS PRINTED CIRCUIT BOARD			
		APPLICATION SPEC	RESTRICTED TO			
MATERIAL SEE SHEET 2	FINISH SEE SHEET 2	WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C=216566	REV N2
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 2		

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	—						
			—	SEE SHEET 1	—	—	—

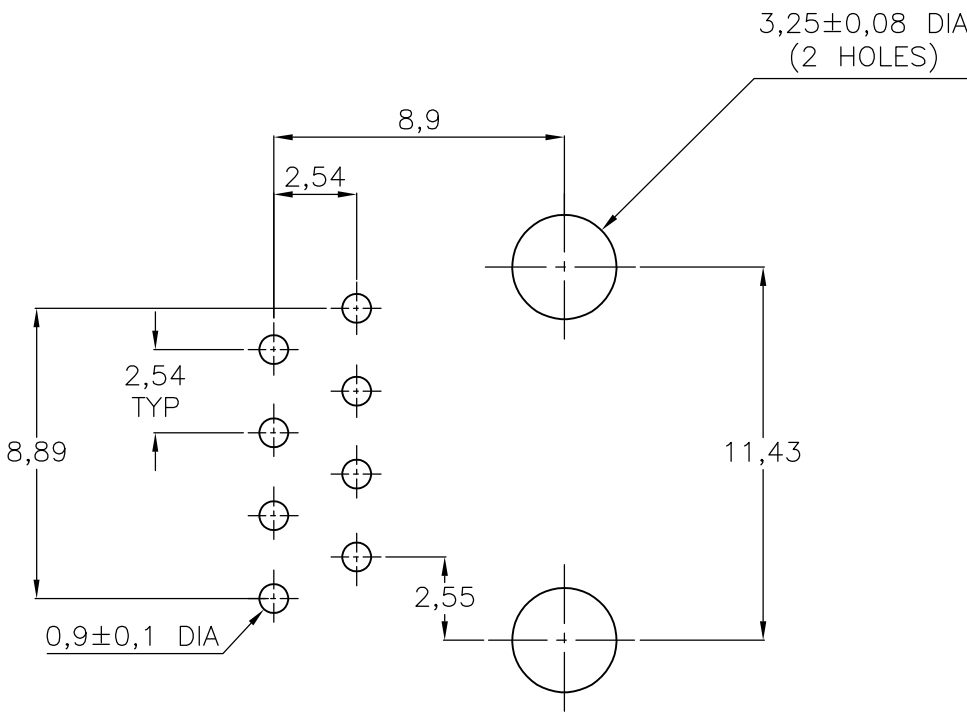

PRINTED CIRCUIT BOARD LAYOUT
[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
TOLERANCES UNLESS OTHERWISE SPECIFIED:±0,05
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.

OBSOLETE	180pcs. IN A TRAY 6 TRAYS IN A BOX	8 POSITIONS/ 8 CONTACTS.	<u>IN CONTACT AREA:</u> 1,2µm MIN.SEL.GOLD OVER 1,2µm MIN.NICKEL	<u>HOUSING:</u> <u>PBT,UL 94-HB</u> COLOR: BLACK	216566-4
	600pcs. ON A 60cm. DIA. REEL.			<u>CONTACTS:</u> PHOSPHOR BRONZE	
				<u>HOUSING:</u> <u>PBT,UL 94V-0</u> COLOR: BLACK	216566-2
				<u>CONTACTS:</u> PHOSPHOR BRONZE	
			<u>SOLDER TINES:</u> 2,0µm MIN. TIN OVER 1,2µm MIN. NICKEL	<u>HOUSING:</u> <u>PBT,UL 94-HB</u> COLOR: BLACK	216566-1
				<u>CONTACTS:</u> PHOSPHOR BRONZE	
	PACKAGING	REMARKS	FINISH	MATERIAL	PARTNUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[216566-1](#)