

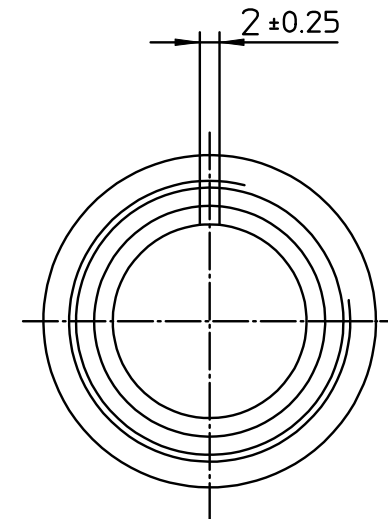


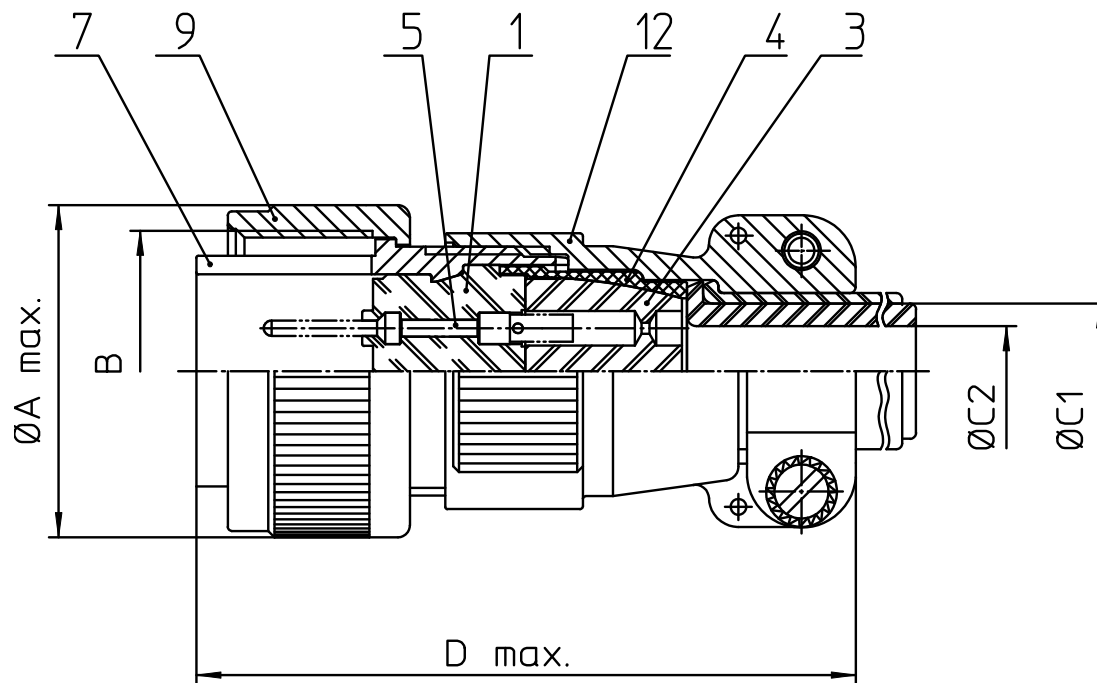

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 37.4              |
| B   | 1 1/4-18NEF-2B    |
| C1  | 15.9              |
| C2  | -                 |
| D   | 68                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 7   | ZYLINDERGHÄUSE / BARREL             |
| 9   | ÜBERWURFMUTTER / COUPLING NUT       |
| 12  | ENDGEHÄUSE / ENDBELL                |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                |
|---------------------|--------------------------------|
| Shell Material:     | Aluminium alloy                |
| Shell Plating:      | Black Zinc Cobalt (conductive) |
| Insulator Material: | Neoprene                       |
| Contact Material:   | Copper alloy                   |
| Contact Plating:    | Gold 0,5 & #956;               |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3106E20-29P-A176-A206  
Plug, straight  
Endbell with clamp and bushing  
Solder Cup / Pin / Layout: 20-29

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1001 16. Jul 20