

## Features


- Ultra-Small Surface Mount Package
- Planar Die Construction
- General Purpose
- Ideally Suited for Automated Assembly Processes
- **Lead Free/RoHS Compliant (Note 2)**
- **"Green" Device (Note 3 and 4)**

## Mechanical Data

- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Polarity: See Diagram
- Marking Information: See Page 4
- Ordering Information: See Page 4
- Weight: 0.002 grams (approximate)



Top View



Device Schematic

## Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                        | Symbol | Value | Unit |
|---------------------------------------|--------|-------|------|
| Zener Current (See Table on page 2)   | —      | —     | —    |
| Forward Voltage @ $I_F = 10\text{mA}$ | $V_F$  | 0.9   | V    |

## Thermal Characteristics

| Characteristic                                   | Symbol          | Value       | Unit               |
|--|-----------------|-------------|--------------------|
| Power Dissipation (Note 1)                       | $P_D$           | 150         | mW                 |
| Thermal Resistance, Junction to Ambient (Note 1) | $R_{\theta JA}$ | 833         | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range          | $T_J, T_{STG}$  | -65 to +150 | $^\circ\text{C}$   |

- Notes:
1. Device mounted on FR-4 PC board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
  2. No purposefully added lead.
  3. Diodes Inc.'s "Green" policy can be found on our website at [http://www.diodes.com/products/lead\\_free/index.php](http://www.diodes.com/products/lead_free/index.php).
  4. Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

**Electrical Characteristics** @<sub>T<sub>A</sub></sub> = 25°C unless otherwise specified

| Type Number | Marking Code | Zener Voltage Range (Note 5)     |         |         | Test Current | Maximum Zener Impedance (Note 6) |                                   | Maximum Reverse Leakage Current (Note 5)      |                |
|-------------|--------------|----------------------------------|---------|---------|--------------|----------------------------------|-----------------------------------|---|----------------|
|             |              | V <sub>Z</sub> @ I <sub>ZT</sub> |         |         |              | I <sub>ZT</sub>                  | Z <sub>ZT</sub> @ I <sub>ZT</sub> | Z <sub>ZK</sub> @ I <sub>ZK</sub><br>= 0.25mA | I <sub>R</sub> |
|             |              | Nom (V)                          | Min (V) | Max (V) | mA           |                                  |                                   |   |                |
| MMBZ5221BT  | KC1          | 2.4                              | 2.28    | 2.52    | 20           | 30                               | 1200                              | 100   | 1.0            |
| MMBZ5223BT  | KC3          | 2.7                              | 2.57    | 2.84    | 20           | 30                               | 1300                              | 75  | 1.0            |
| MMBZ5225BT  | KC5          | 3.0                              | 2.85    | 3.15    | 20           | 30                               | 1600                              | 50  | 1.0            |
| MMBZ5226BT  | KG1          | 3.3                              | 3.14    | 3.47    | 20           | 28                               | 1600                              | 25  | 1.0            |
| MMBZ5227BT  | KG2          | 3.6                              | 3.42    | 3.78    | 20           | 24                               | 1700                              | 15  | 1.0            |
| MMBZ5228BT  | KG3          | 3.9                              | 3.71    | 4.10    | 20           | 23                               | 1900                              | 10  | 1.0            |
| MMBZ5229BT  | KG4          | 4.3                              | 4.09    | 4.52    | 20           | 22                               | 2000                              | 5.0   | 1.0            |
| MMBZ5230BT  | KG5          | 4.7                              | 4.47    | 4.94    | 20           | 19                               | 1900                              | 5.0   | 2.0            |
| MMBZ5231BT  | KE1          | 5.1                              | 4.85    | 5.36    | 20           | 17                               | 1600                              | 5.0   | 2.0            |
| MMBZ5232BT  | KE2          | 5.6                              | 5.32    | 5.88    | 20           | 11                               | 1600                              | 5.0   | 3.0            |
| MMBZ5234BT  | KE4          | 6.2                              | 5.89    | 6.51    | 20           | 7.0                              | 1000                              | 5.0   | 4.0            |
| MMBZ5235BT  | KE5          | 6.8                              | 6.46    | 7.14    | 20           | 5.0                              | 750                               | 3.0   | 5.0            |
| MMBZ5236BT  | KF1          | 7.5                              | 7.13    | 7.88    | 20           | 6.0                              | 500                               | 3.0   | 6.0            |
| MMBZ5237BT  | KF2          | 8.2                              | 7.79    | 8.61    | 20           | 8.0                              | 500                               | 3.0   | 6.5            |
| MMBZ5239BT  | KF4          | 9.1                              | 8.65    | 9.56    | 20           | 10                               | 600                               | 3.0   | 7.0            |
| MMBZ5240BT  | KF5          | 10                               | 9.50    | 10.50   | 20           | 17                               | 600                               | 3.0   | 8.0            |
| MMBZ5241BT  | KH1          | 11                               | 10.45   | 11.55   | 20           | 22                               | 600                               | 2.0   | 8.4            |
| MMBZ5242BT  | KH2          | 12                               | 11.40   | 12.60   | 20           | 30                               | 600                               | 1.0   | 9.1            |
| MMBZ5243BT  | KH3          | 13                               | 12.35   | 13.65   | 9.5          | 13                               | 600                               | 0.5   | 9.9            |
| MMBZ5245BT  | KH5          | 15                               | 14.25   | 15.75   | 8.5          | 16                               | 600                               | 0.1   | 11             |
| MMBZ5246BT  | KJ1          | 16                               | 15.20   | 16.80   | 7.8          | 17                               | 600                               | 0.1   | 12             |
| MMBZ5248BT  | KJ3          | 18                               | 17.10   | 18.90   | 7.0          | 21                               | 600                               | 0.1   | 14             |
| MMBZ5250BT  | KJ5          | 20                               | 19.00   | 21.00   | 6.2          | 25                               | 600                               | 0.1   | 15             |
| MMBZ5251BT  | KK1          | 22                               | 20.90   | 23.10   | 5.6          | 29                               | 600                               | 0.1   | 17             |
| MMBZ5252BT  | KK2          | 24                               | 22.80   | 25.20   | 5.2          | 33                               | 600                               | 0.1   | 18             |
| MMBZ5254BT  | KK4          | 27                               | 25.65   | 28.35   | 5.0          | 41                               | 600                               | 0.1   | 21             |
| MMBZ5255BT  | KK5          | 28                               | 26.60   | 29.40   | 4.5          | 44                               | 600                               | 0.1   | 21             |
| MMBZ5256BT  | KM1          | 30                               | 28.50   | 31.50   | 4.2          | 49                               | 600                               | 0.1   | 23             |
| MMBZ5257BT  | KM2          | 33                               | 31.35   | 34.65   | 3.8          | 58                               | 700                               | 0.1   | 25             |
| MMBZ5258BT  | KM3          | 36                               | 34.20   | 37.80   | 3.4          | 70                               | 700                               | 0.1   | 27             |
| MMBZ5259BT  | KM4          | 39                               | 37.05   | 40.95   | 3.2          | 80                               | 800                               | 0.1   | 30             |

Notes: 5. Short duration pulse test used to minimize self-heating effect.  
6. f = 1KHz.

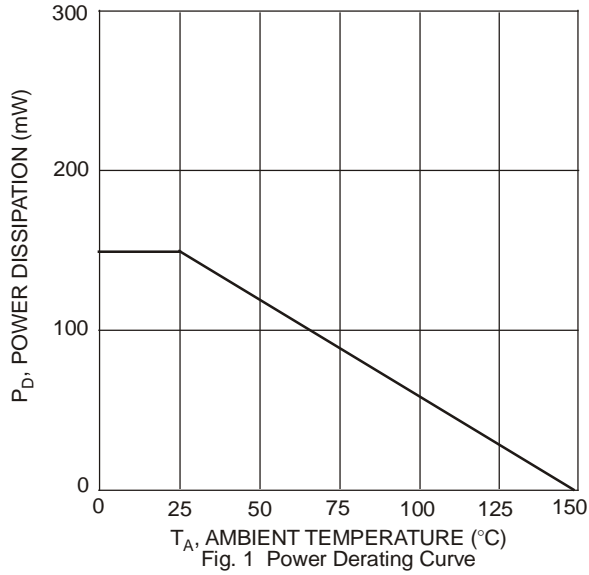


Fig. 1 Power Derating Curve

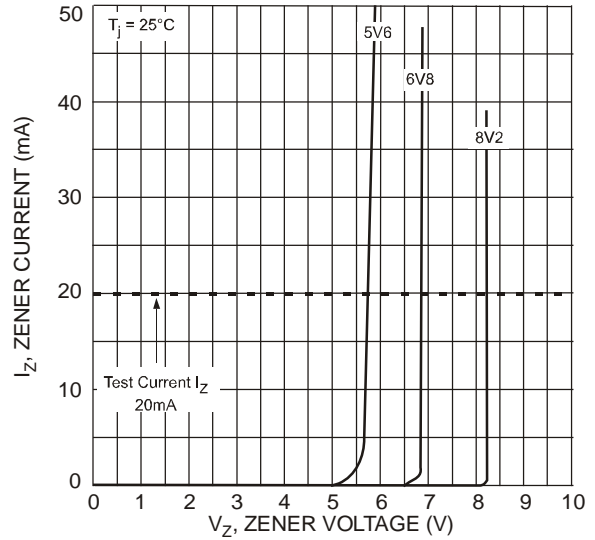


Fig. 2 Typical Zener Breakdown Characteristics

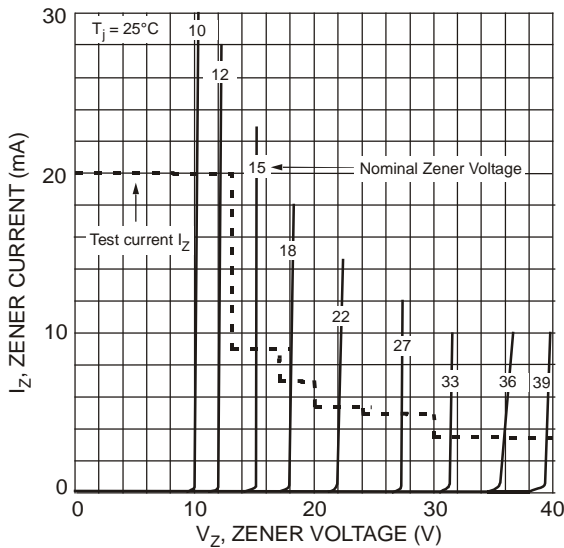


Fig. 3 Typical Zener Breakdown Characteristics

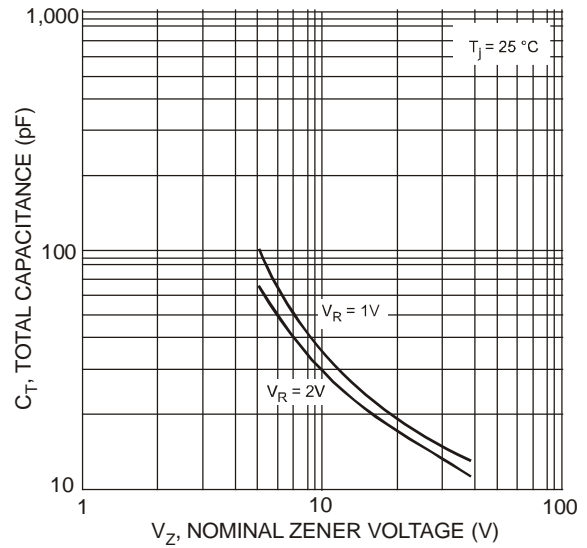


Fig. 4 Typical Total Capacitance vs. Nominal Zener Voltage

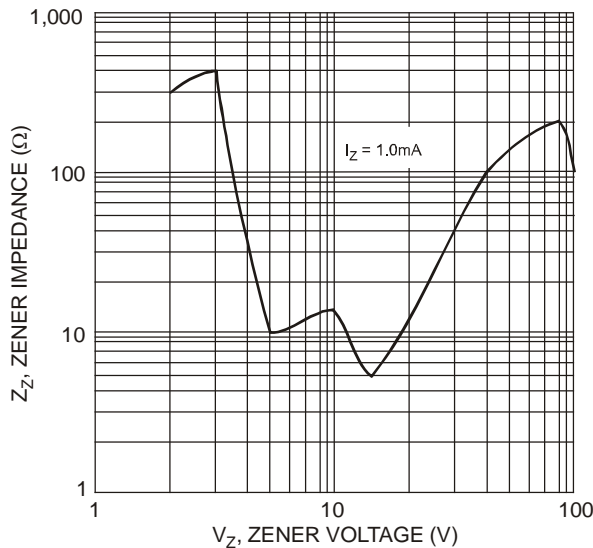


Fig. 5 Typical Zener Impedance Characteristics

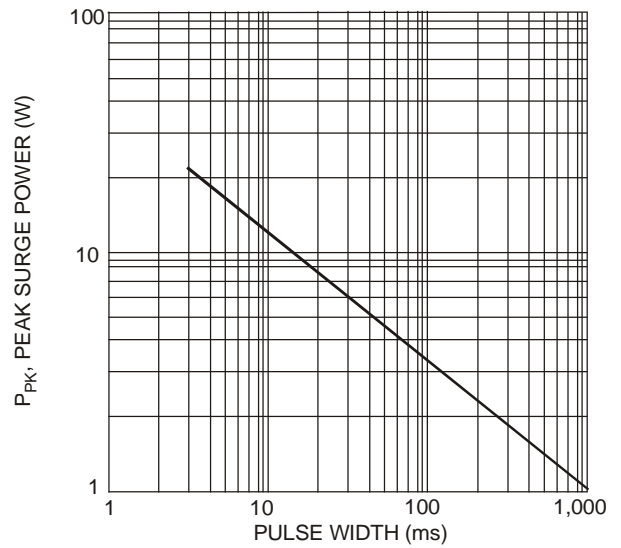



Fig. 6 Maximum Non-repetitive Surge Power

**Ordering Information** (Note 7)

| Device            | Packaging | Shipping         |
|-------------------|-----------|------------------|
| (Type Number)-7-F | SOT-523   | 3000/Tape & Reel |

\* Add "-7-F" to the appropriate type number in from Electrical Characteristics Table, example: 6.2V Zener = MMBZ5234BTS-7-F.

Notes: 7. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

**Marking Information**


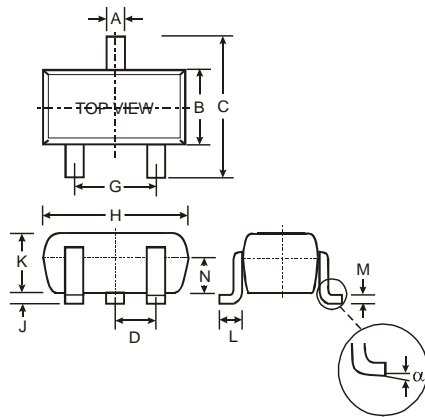
Kxx = Product Type Marking Code  
(See Electrical Characteristics Table)  
YM = Date Code Marking  
Y = Year (ex: N = 2002)  
M = Month (ex: 9 = September)

**Date Code Key**


| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2111 | 2012 | 2013 | 2014 | 2015 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | N    | P    | R    | S    | T    | U    | V    | W    | X    | Y    | Z    | A    | B    | C    |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |

**Package Outline Dimensions**


| SOT-523              |      |      |      |
|----------------------|------|------|------|
| Dim                  | Min  | Max  | Typ  |
| A                    | 0.15 | 0.30 | 0.22 |
| B                    | 0.75 | 0.85 | 0.80 |
| C                    | 1.45 | 1.75 | 1.60 |
| D                    | —    | —    | 0.50 |
| G                    | 0.90 | 1.10 | 1.00 |
| H                    | 1.50 | 1.70 | 1.60 |
| J                    | 0.00 | 0.10 | 0.05 |
| K                    | 0.60 | 0.80 | 0.75 |
| L                    | 0.10 | 0.30 | 0.22 |
| M                    | 0.10 | 0.20 | 0.12 |
| N                    | 0.45 | 0.65 | 0.50 |
| $\alpha$             | 0°   | 8°   | —    |
| All Dimensions in mm |      |      |      |

**Suggested Pad Layout**

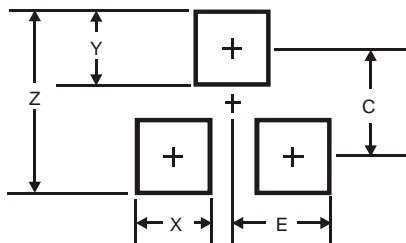
| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 1.8           |
| X          | 0.4           |
| Y          | 0.51          |
| C          | 1.3           |
| E          | 0.7           |

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Diodes Incorporated:

[MMBZ5221BT-7](#) [MMBZ5221BT-7-F](#) [MMBZ5223BT-7](#) [MMBZ5223BT-7-F](#) [MMBZ5225BT-7](#) [MMBZ5225BT-7-F](#)  
[MMBZ5226BT-7](#) [MMBZ5226BT-7-F](#) [MMBZ5227BT-7](#) [MMBZ5227BT-7-F](#) [MMBZ5228BT-7](#) [MMBZ5228BT-7-F](#)  
[MMBZ5229BT-7](#) [MMBZ5229BT-7-F](#) [MMBZ5230BT-7](#) [MMBZ5230BT-7-F](#) [MMBZ5231BT-7](#) [MMBZ5231BT-7-F](#)  
[MMBZ5232BT-7](#) [MMBZ5232BT-7-F](#) [MMBZ5234BT-7](#) [MMBZ5234BT-7-F](#) [MMBZ5235BT-7](#) [MMBZ5235BT-7-F](#)  
[MMBZ5236BT-7](#) [MMBZ5236BT-7-F](#) [MMBZ5237BT-7](#) [MMBZ5237BT-7-F](#) [MMBZ5239BT-7](#) [MMBZ5239BT-7-F](#)  
[MMBZ5240BT-7](#) [MMBZ5240BT-7-F](#) [MMBZ5241BT-7](#) [MMBZ5241BT-7-F](#) [MMBZ5242BT-7](#) [MMBZ5242BT-7-F](#)  
[MMBZ5243BT-7](#) [MMBZ5243BT-7-F](#) [MMBZ5245BT-7](#) [MMBZ5245BT-7-F](#) [MMBZ5246BT-7](#) [MMBZ5246BT-7-F](#)  
[MMBZ5248BT-7](#) [MMBZ5248BT-7-F](#) [MMBZ5250BT-7](#) [MMBZ5250BT-7-F](#) [MMBZ5251BT-7](#) [MMBZ5251BT-7-F](#)  
[MMBZ5254BT-7](#) [MMBZ5254BT-7-F](#) [MMBZ5255BT-7](#) [MMBZ5255BT-7-F](#) [MMBZ5256BT-7](#) [MMBZ5256BT-7-F](#)  
[MMBZ5257BT-7](#) [MMBZ5257BT-7-F](#) [MMBZ5258BT-7](#) [MMBZ5258BT-7-F](#) [MMBZ5259BT-7](#) [MMBZ5259BT-7-F](#)