



LOC		DIST		REVISIONS					
FT		0		DESCRIPTION			DATE	DWN	APVD
		P	LTR						
			BI	REVISED PER ECO-10-009455			06MAY2010	HMR	CR

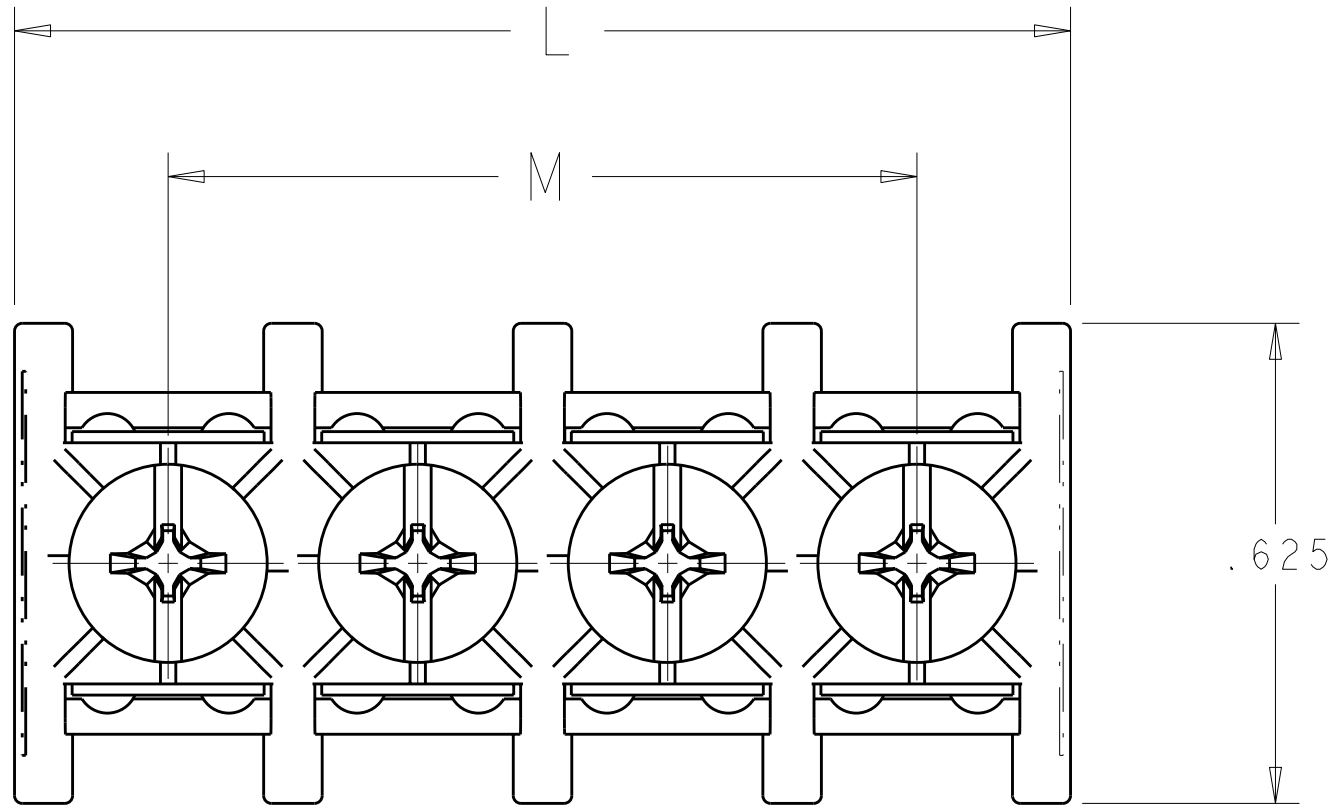



1. ELECTRICAL RATINGS: 300V, 20A
WIRE RANGE: 12-22 AWG
RECOMMENDED TIGHTENING TORQUE: 10 IN LBS
OPERATING TEMPERATURE: 105° MAX

△ TYCO ELECTRONICS LOGO LOCATED IN APPROXIMATE AREA SHOWN

6-32 SEMS SCREW, CAPTIVATED,
STEEL, ZINC PLATED CLEAR CHROMATE

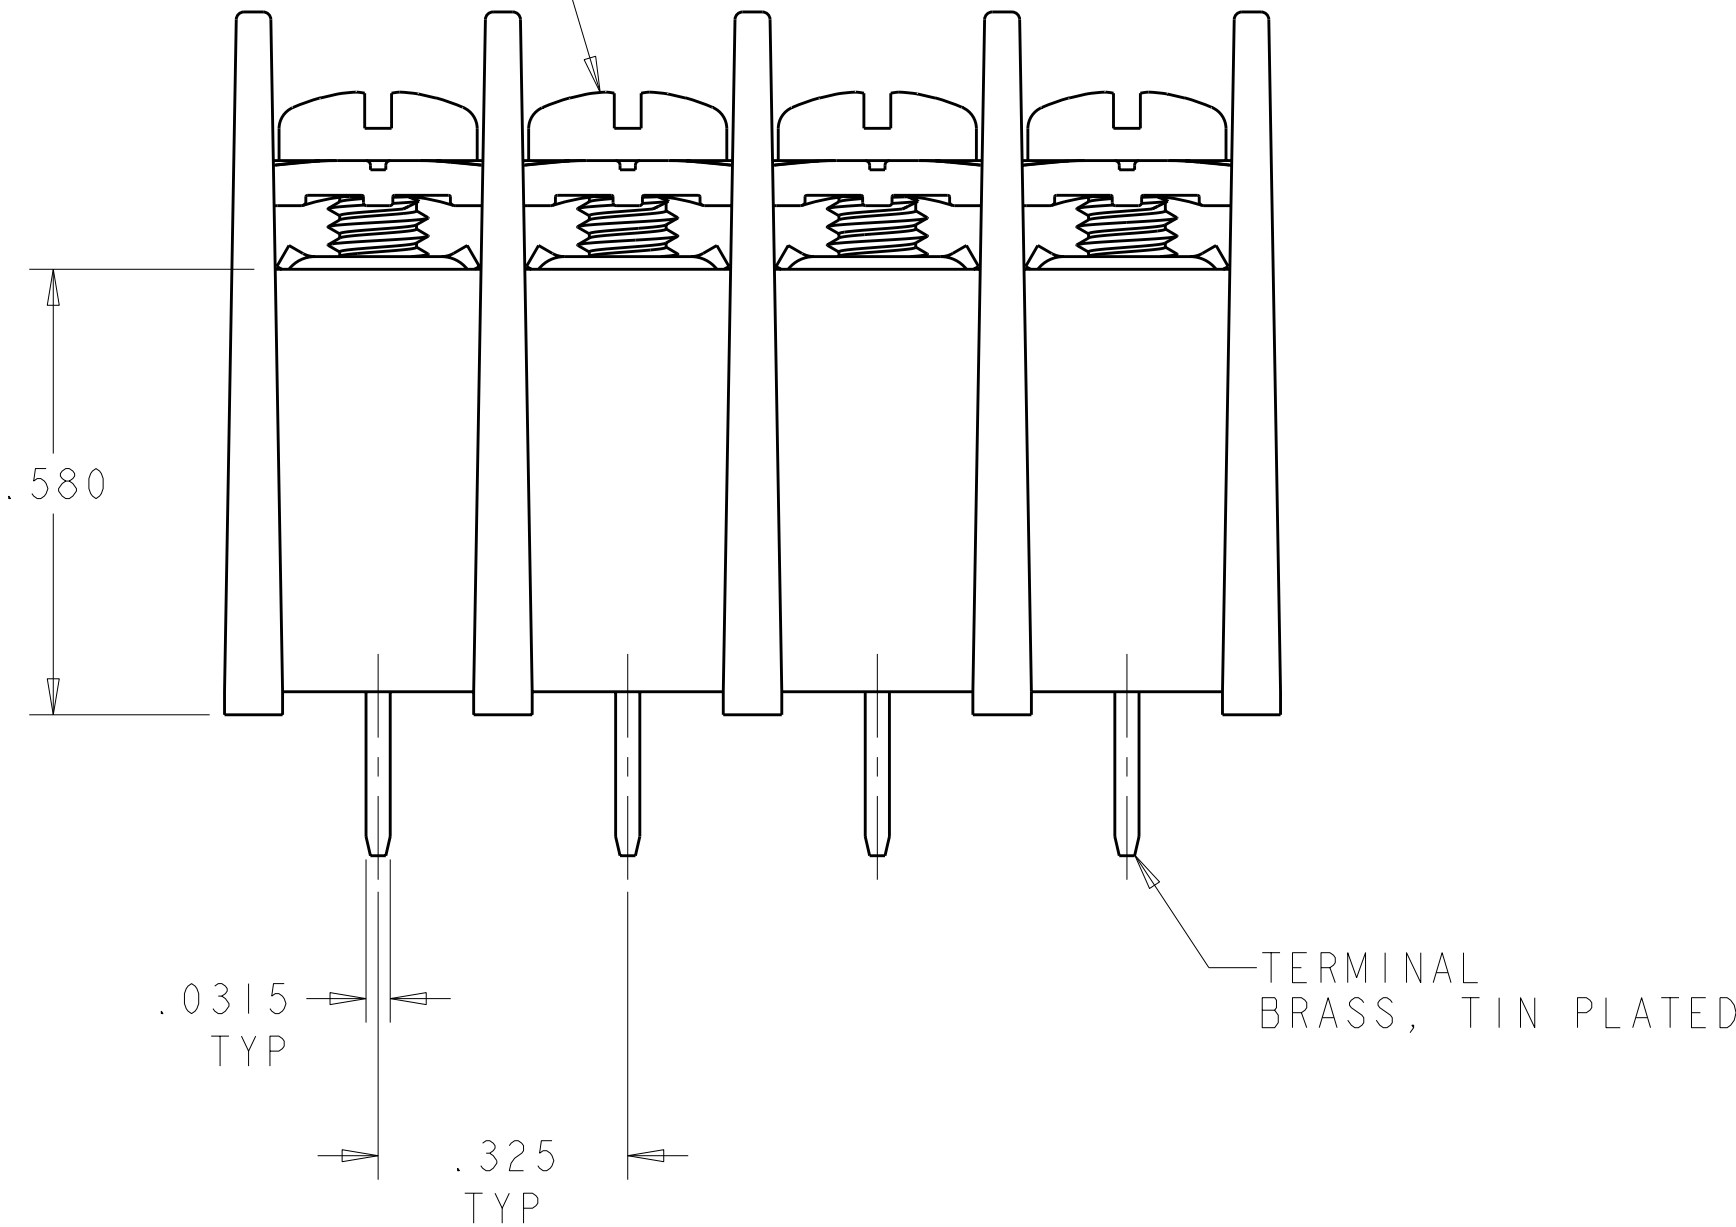

HOUSING
NYLON, BLACK,
UL 94 V-0 RATED

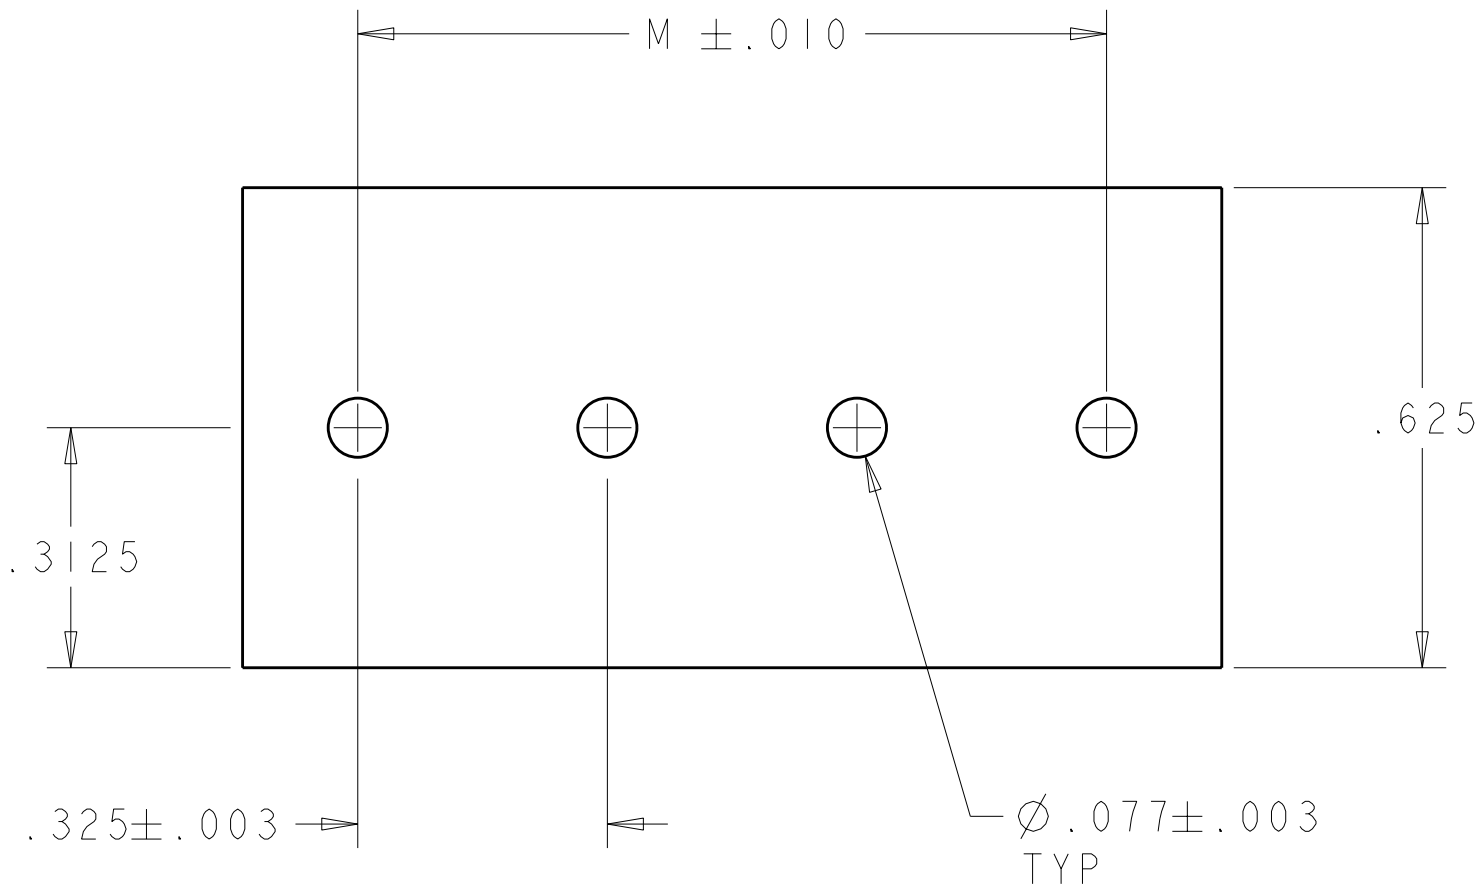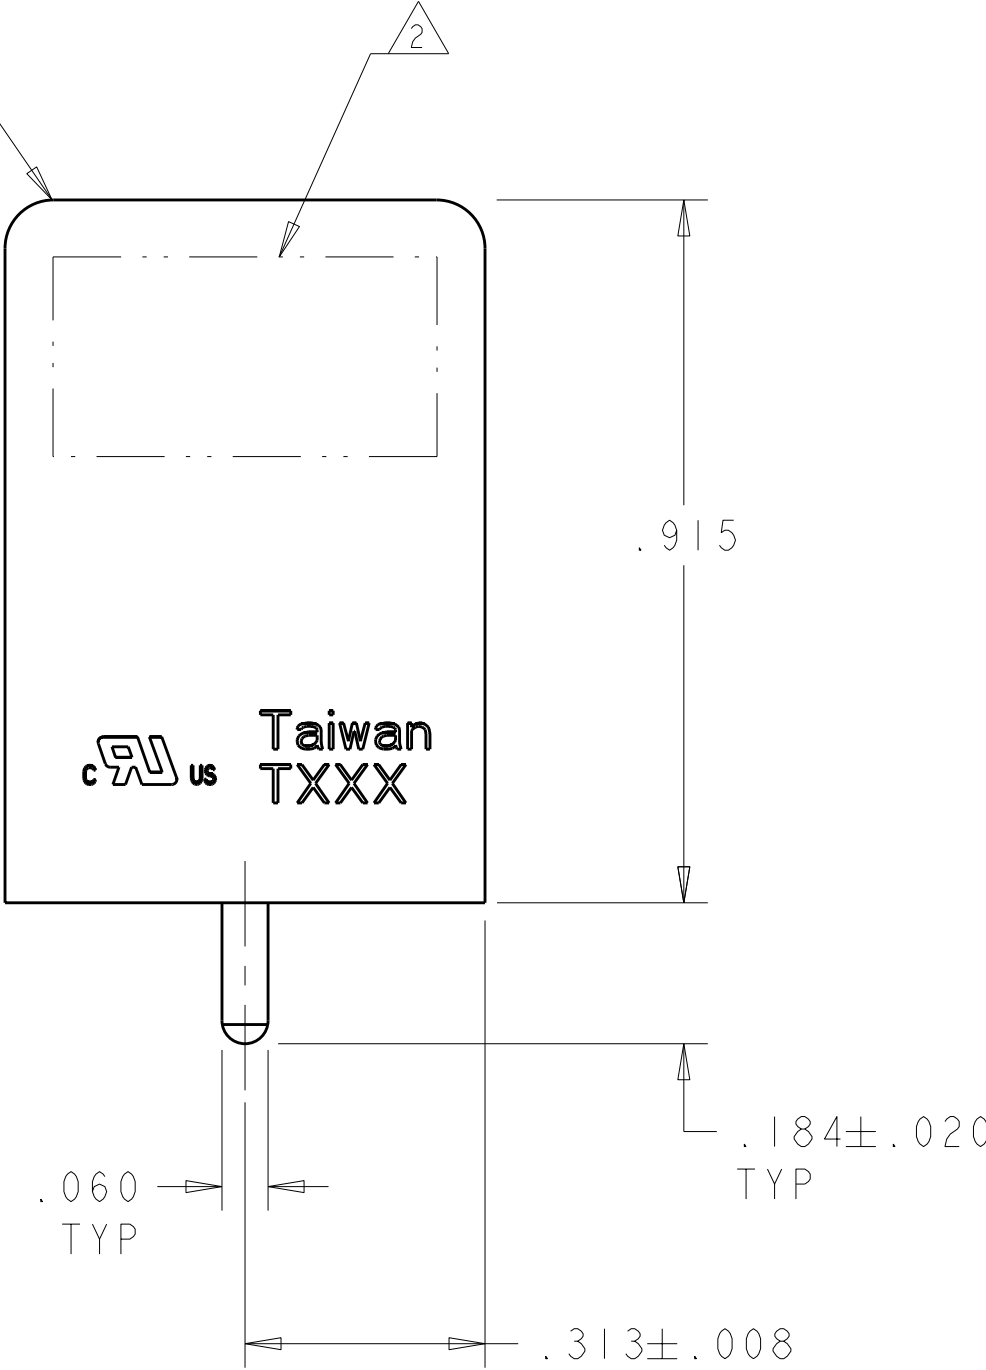

RECOMMENDED PC BOARD LAYOUT

4.875	5.275	16	1-1546734-6
4.550	4.950	15	1-1546734-5
4.225	4.625	14	1-1546734-4
3.900	4.300	13	1-1546734-3
3.575	3.975	12	1-1546734-2
3.250	3.650	11	1-1546734-1
2.925	3.325	10	1-1546734-0
2.600	3.000	9	1546734-9
2.275	2.675	8	1546734-8
1.950	2.350	7	1546734-7
1.625	2.025	6	1546734-6
1.300	1.700	5	1546734-5
.975	1.375	4	1546734-4
.650	1.050	3	1546734-3
.325	.725	2	1546734-2
M	L	NO OF POSN	PART NUMBER

THIS DRAWING IS CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE WITHOUT NOTICE AND WITHOUT NOTICE TO THE CUSTOMER SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. WELDON 11SEP2003	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK S. YODER 11SEP2003	NAME DUAL BARRIER STRIP ASSEMBLY, .325 PITCH, PCB MOUNT, HIGH RISE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. YODER 11SEP2003	PRODUCT SPEC	
		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO
9 PLC ±.1		WEIGHT		
1 PLC ±0.1		CUSTOMER DRAWING		
2 PLC ±0.02		SCALE 4:1 SHEET 1 OF 1 REV B		
3 PLC ±0.005				
4 PLC ±0.0005				
ANGLES ±.1				
FINISH				
MATERIAL				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1546734-4](#)