

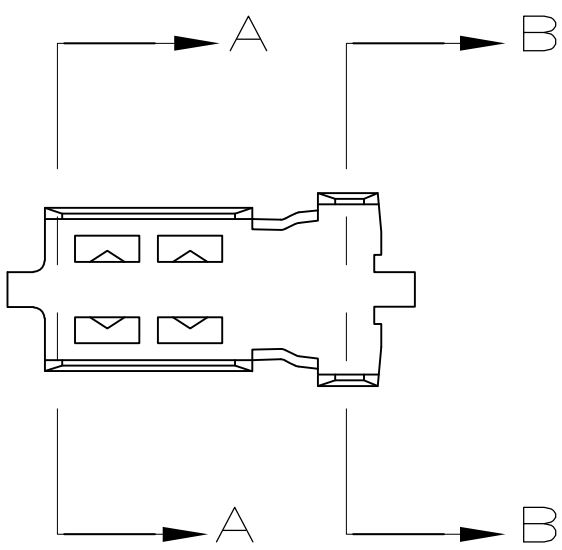
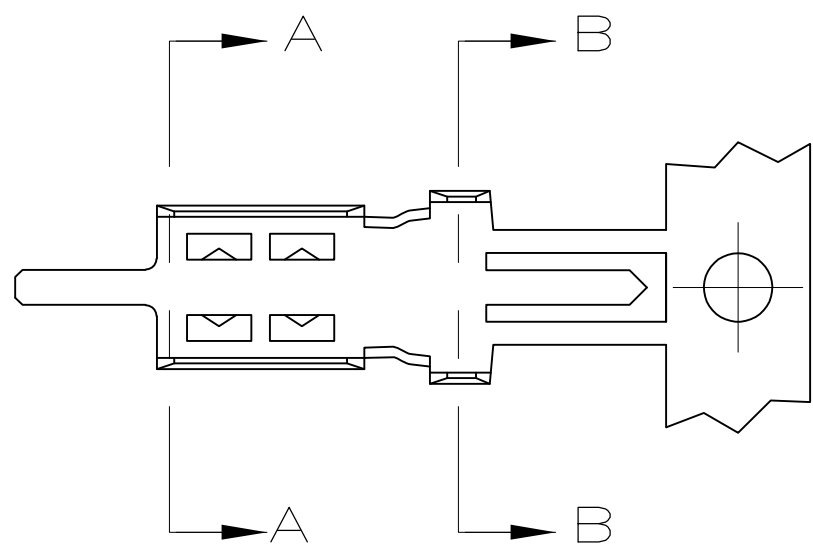
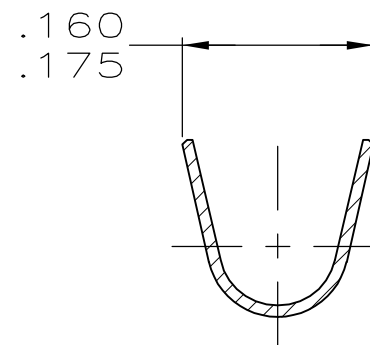
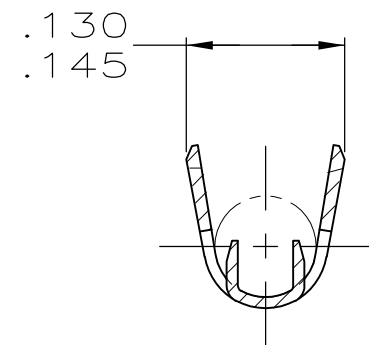


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		N1	REVISED PER ECO-11-005030	11MAR11	RK	HMR

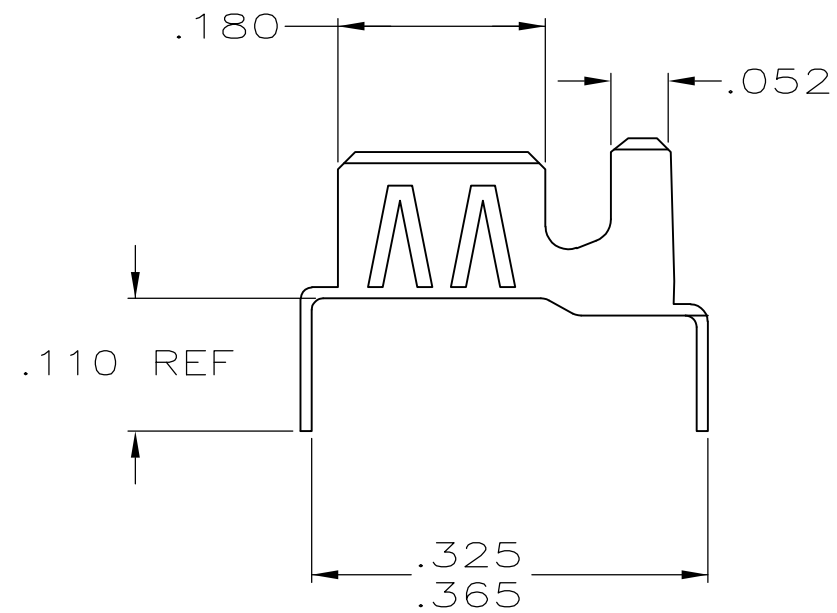

1. ACCEPTS COAX CABLE WITH .095-.110 O.D. JACKETS AND .055-.065 DIELECTRIC O.D.
EXAMPLE: RG-174 AND RG-316
2. TIN PLATE PER ASTM-B-545.
3. INSTRUCTION SHEET NO.: 408-2472-2.
4. ON STRIP
5. ON STRIP, LEGS MUST BE BENT MANUALLY AFTER CRIMPING.
6. LOOSE PIECE PARTS WITH PREFORMED LEGS.
7. BRASS PER ASTM-B-36.
8. TIN-LEAD PLATE PER ASTM-B-545.

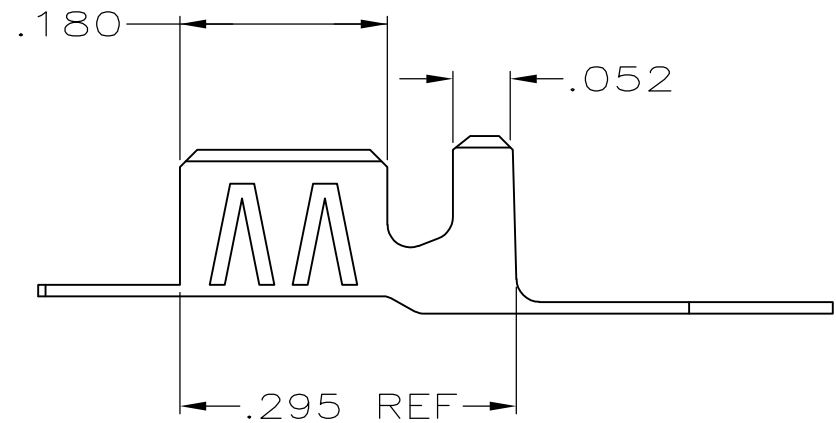


VIEW C



VIEW D

SECTION A-A

SECTION B-B

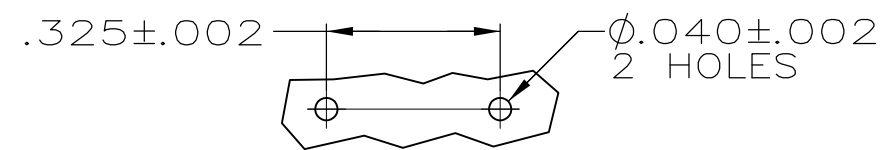

PCB LAYOUT

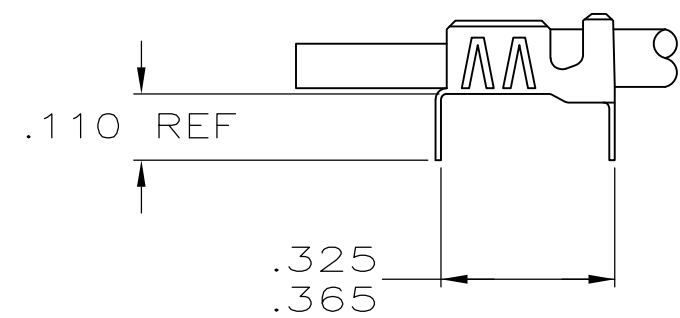

AS APPLIED BY APPLICATOR

AS APPLIED BY APPLICATOR

VIEW E

VIEW F

2	D	6	9-226176-2
2	C&F	5	9-226176-1
2	C&E	4	9-226176-0
8	D	6	226176-4
8	C&F	5	226176-3
8	C&E	4	226176-2
FINISH	VIEW	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. OBRINE 30JUN99	 TE Connectivity					
		CHK M. OBRINE 30JUN99						
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. CABRILLO 30JUN99	NAME BRAID-PIC P.C. BOARD GROUND TERMINAL SINGLE CRIMP-SINGLE CONTACT					
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± -	PRODUCT SPEC — APPLICATION SPEC —						
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
SEE NOTE 7	SEE TABLE	.007 OZ	A2	00779	C-226176		—	
CUSTOMER DRAWING					SCALE	SHEET		REV
					6:1	1 OF 1		N1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[226176-3](#)