


LOC	DIST	ZONE	LTR	DESCRIPTION	DATE	APPD
6	14		A	REVISED PER 0720-0230-93	2/28/94	DAV

METRIC
DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	UL E13288 Listed
12-10 AWG STRANDED	12-10 AWG STRANDED
 LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

 STAMP AMP 12-10* APPROX AS SHOWN

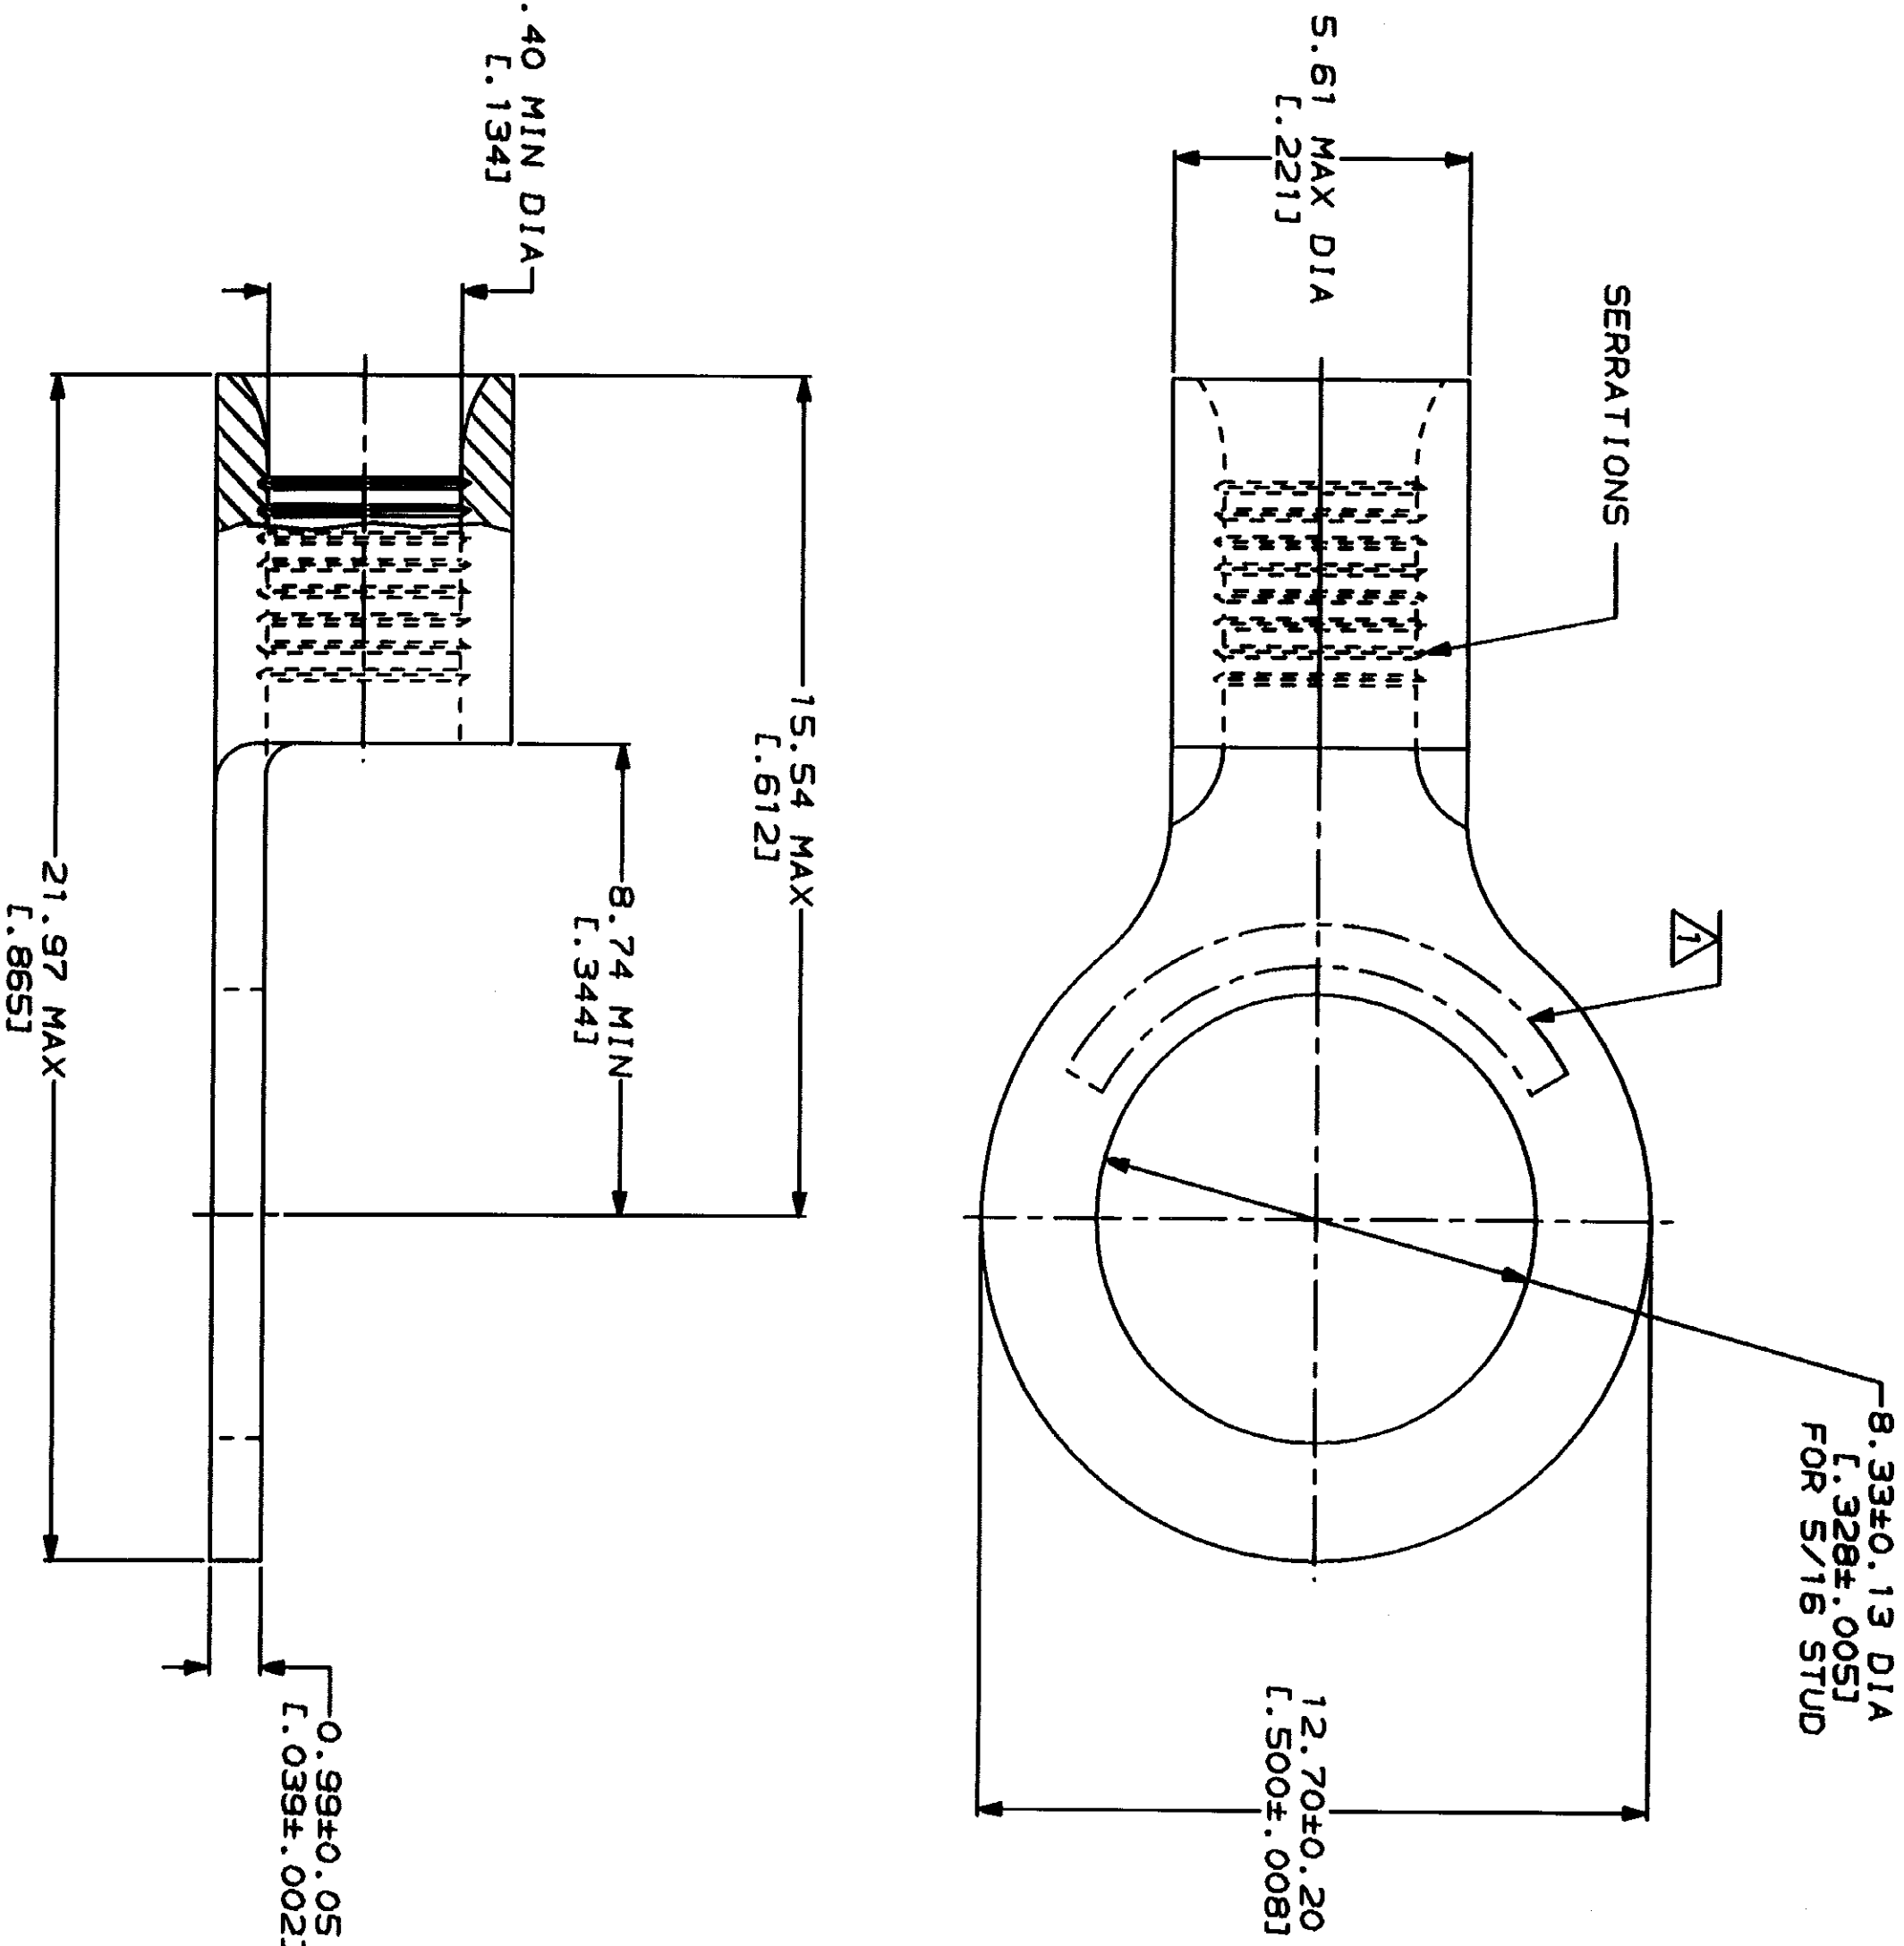

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
2.62-6.64mm² (5,180-13,100) CIR MILS
STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND SHOULD BE CONSULTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN - FINISHES -
TOLERANCES ON:
2 PLC DEC ±
3 PLC DEC ±
ANGLES
MATERIAL:
COPPER PER
ASTM B-152
ANNEALED

FINISH
TIN PLATE
0.00254 [1.000100] MIN
THK PER MIL-T-10727

DR 2-9-93
TA BRINKMAN
CHK 2-9-93
DA PATTERSON

APPD 2-9-93
DE MILLER
APPD 2-9-93
JL MECKLEY
PRODUCT SPEC

APPLICATION SPEC

AMP
AMP Incorporated
Harrisburg, PA 17125-3508

TERMINAL, RING TONGUE,
BUDGET

SIZE
CAGE CODE
00779
SCALE 8:1

DRAWING NO
34966
SHEET 1 OF 1

PART NO
34966

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[34966](#)