

D

C

B


A

D


C

B


A

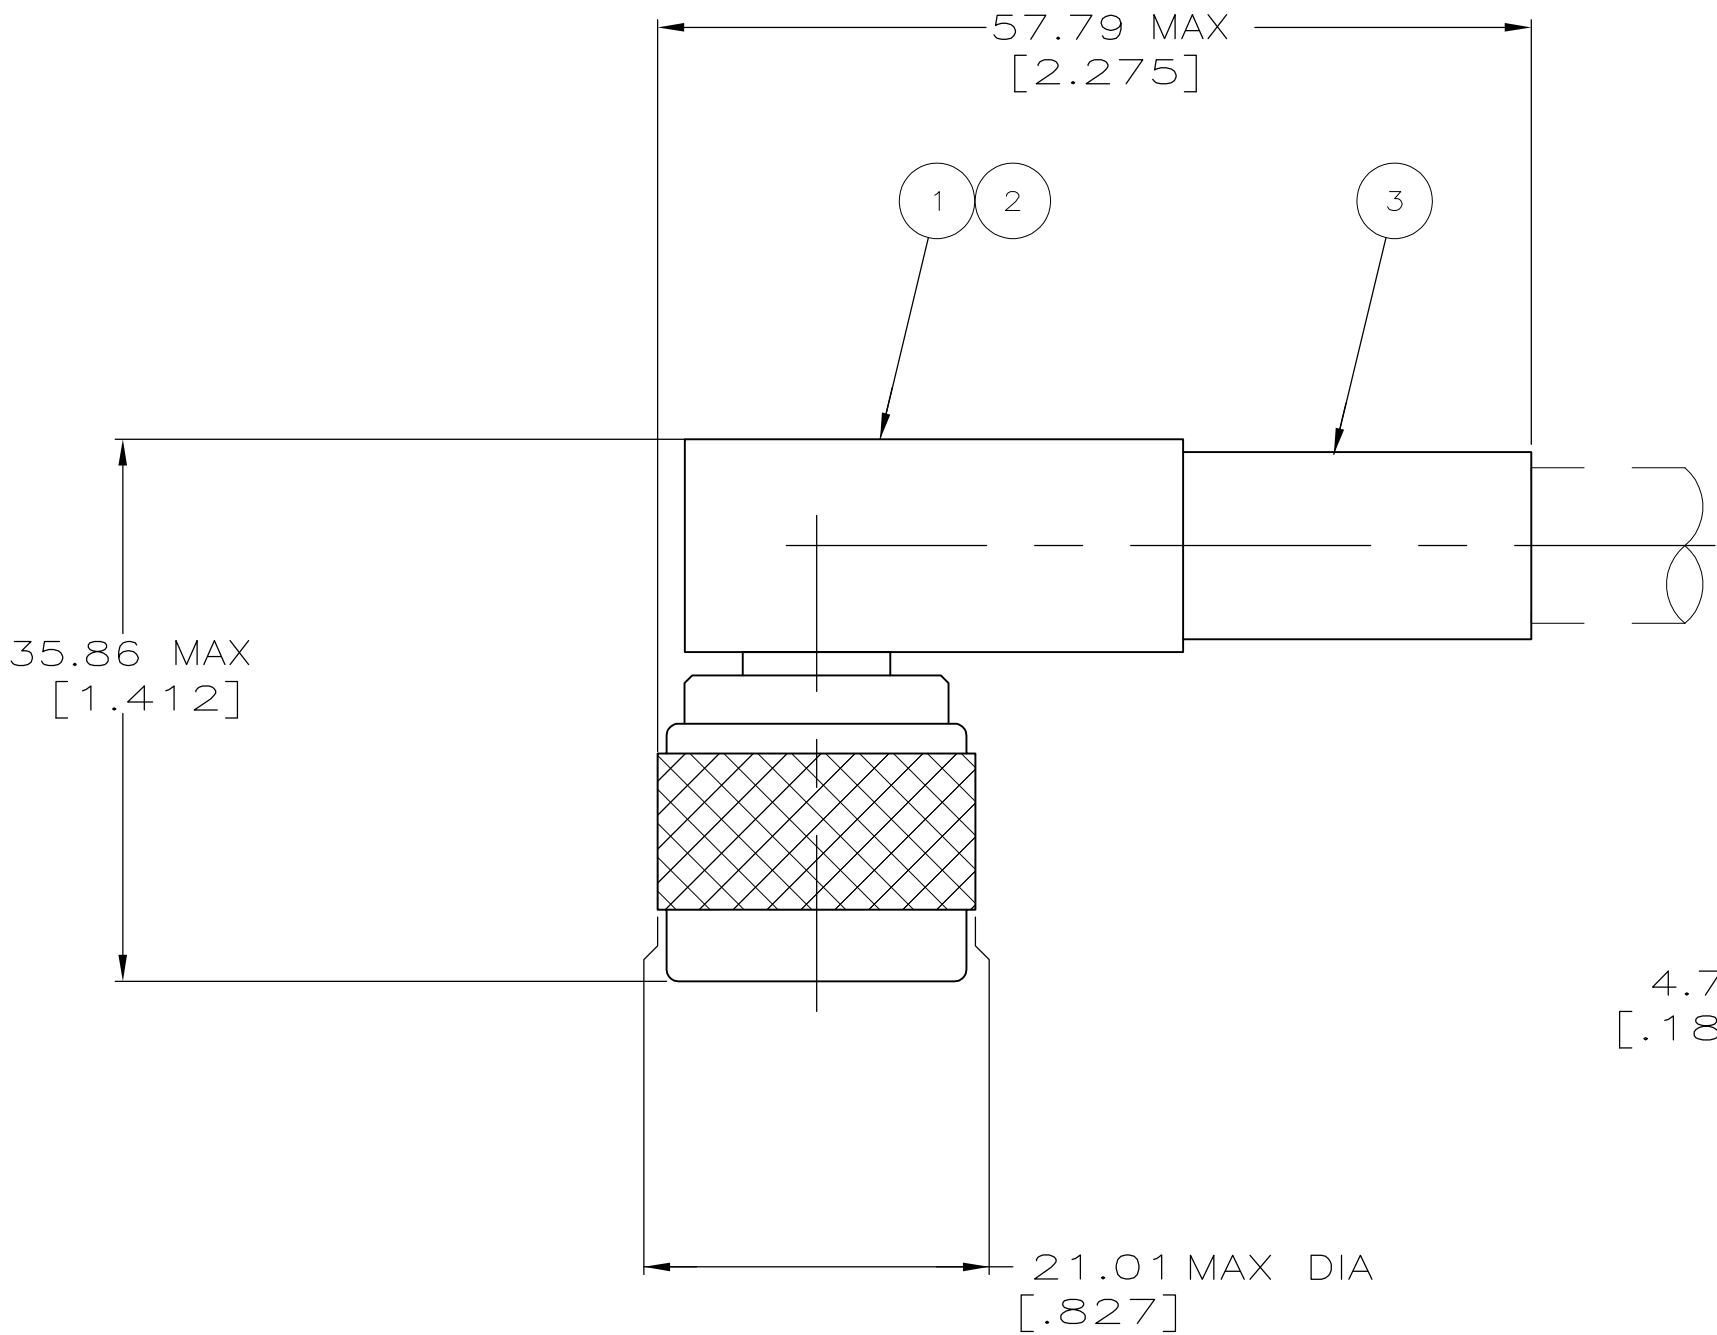

1. USE CRIMPING TOOL 220015-1
2. SEE I S 2028-5

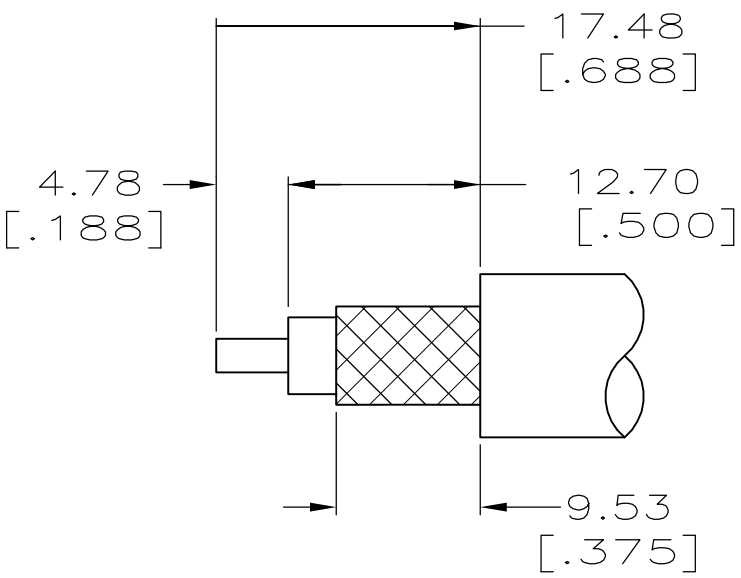

RECOMMENDED STRIP LENGTH
(FOR -2 ONLY)

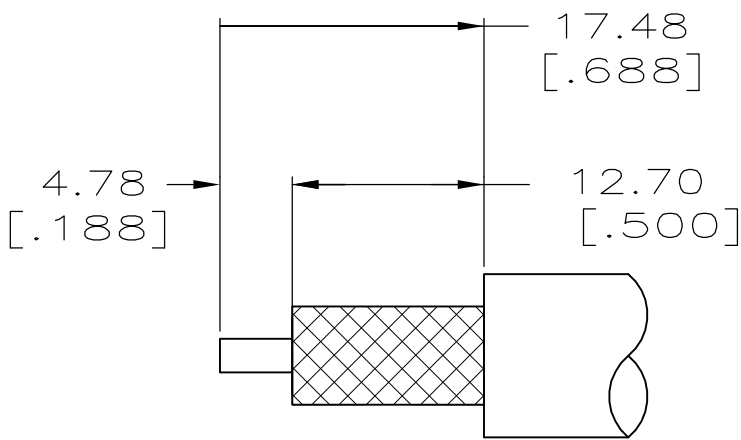

RECOMMENDED STRIP LENGTH

OBSOLETE	-	-	-	-	-	1-225014-0
OBSOLETE	RG-115A/U	225014-4 AMP	51713-2	51704-2	225350-1	225014-4
	RG-214/U	00779M39012/05 B 0003 AMP & DATE CODE	9-51713-4	51704-2	225327-1	225014-3
OBSOLETE	RG-213/U	00779M39012/05 B 0002 AMP & DATE CODE	9-51713-4	51704-2	225327-1	225014-2
	CABLE SIZE	STAMPING	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	0.41 [.016]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH
-

DWN
NIK FRITZ
8-3-90

CHK
M. SNEED
1-21-90

APVD
-

PRODUCT SPEC
108-12019

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

PLUG, RIGHT ANGLE, SERIES N

SIZE A2	CAGE CODE 00779	DRAWING NO C=225014	RESTRICTED TO -
------------	--------------------	------------------------	--------------------

SCALE 4:1	SHEET 1 of 1	REV H
--------------	-----------------	----------

225014

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[225014-3](#)