



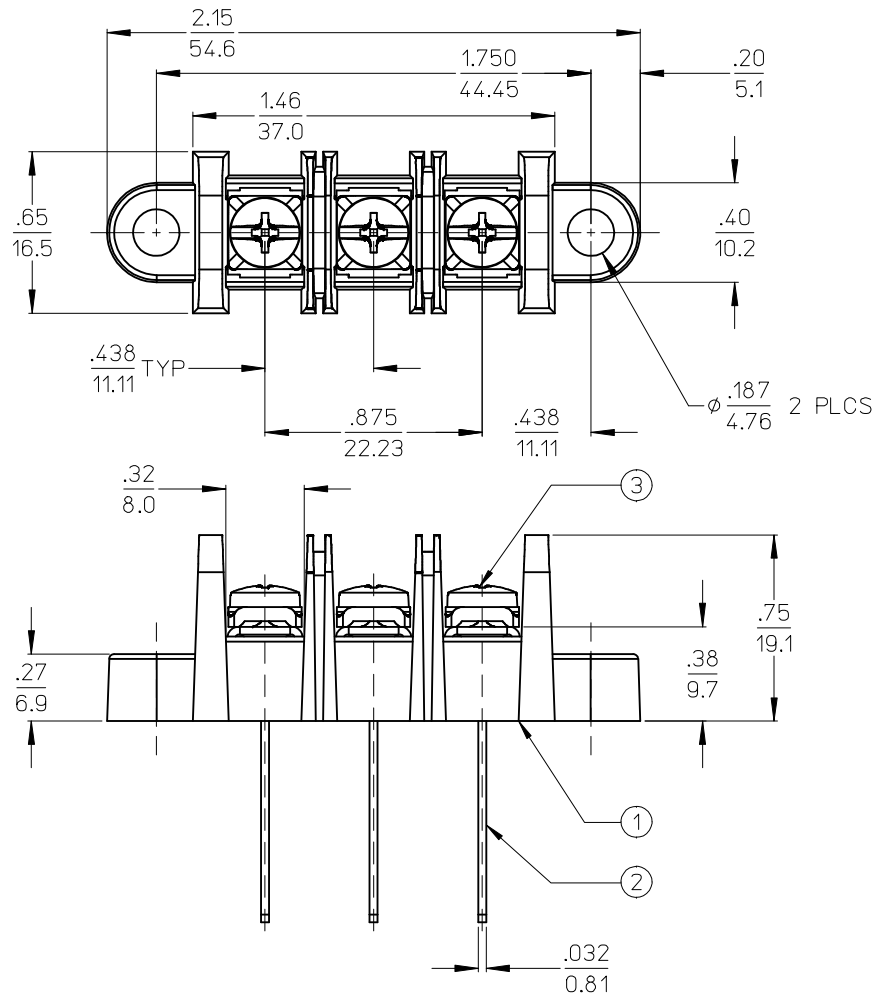


Ⓑ NOTES:


1. MATERIAL: SEE TABLE
2. FINISH: SEE TABLE
3. ELECTRICAL SPECS:  
MAX VOLTAGE: 600V  
MAX CURRENT: 25A (6-32 WIRE CLAMP SCREW)
4. SCREW TIGHTENING TORQUE: 12 IN LBS. (MAX)
5. WIRE STRIP LENGTH: .31 (7.9mm)
6. WIRE RANGE: 22 TO 12AWG
7. PART IS RoHS COMPLIANT
8. DIMS SHOWN ARE FOR REFERENCE ONLY

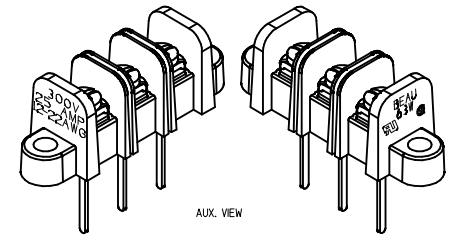

Ⓑ PTH PATTERN

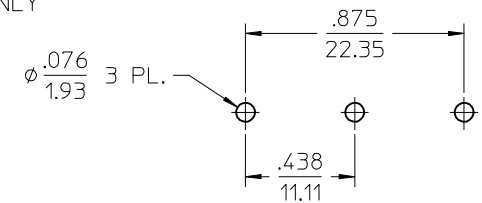

SEALANT APPLIED  
AROUND EACH  
TERMINAL (3 PLCS)

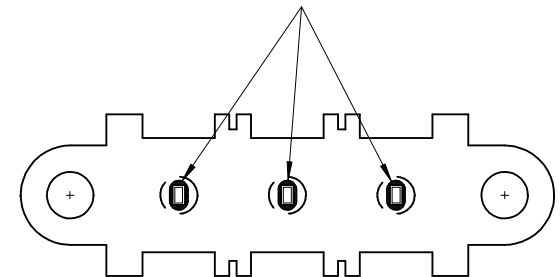

|      |      |                                             |          |                    |
|------|------|---------------------------------------------|----------|--------------------|
| 3    | 3    | SCREW #6-32X.250 PAN PHSL.ZN, BR, STEEL -50 | STEEL    | ZN, CLEAR CHROMATE |
| 2    | 3    | TERM WW SN/B EXTRA LONG                     | BRASS    | TIN                |
| 1    | 1    | INSULATOR, SR, PC, MOLDED MTG               | PBT      | BLACK              |
| ITEM | QTY. | DESCRIPTION                                 | MATERIAL | FINISH             |

REMOVED RED EPOXY NOTE  
REV'D NOTES: ADD PTH PATTERN  
EC NO: IPG2017-0467  
DWRN:STONE 2016/11/09  
CHYKDB RUPERT 2016/11/14  
APPR:BWODMAN 2016/11/30

QUALITY  
SYMBOLS  
▽=0  
▽=0

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

|          | mm     | INCH    |
|----------|--------|---------|
| 4 PLACES | ± .005 | ± .0005 |
| 3 PLACES | ± .01  | ± .001  |
| 2 PLACES | ± .03  | ± .003  |
| 1 PLACE  | ± .06  | ± .006  |

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

DIMENSION STYLE  
IN/MM

DRAWN BY DATE  
JENCINAS 2008/01/14

CHECKED BY DATE  
CYORK 2008/01/14

APPROVED BY DATE  
JMACNEIL 2008/01/14

MATERIAL NO.  
386390067

SIZE  
B

SCALE  
2:1

DESIGN UNITS  
INCH

THIRD ANGLE  
PROJECTION

TITLE  
11.1/.438 SR BTS ASSY  
600V NO PADS, SQ. WASHER  
SEALED TERMINAL HOLES

MOLEX INCORPORATED

DOCUMENT NO.  
SD-38639-011

SHEET NO.  
1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[38639-0067](#)