
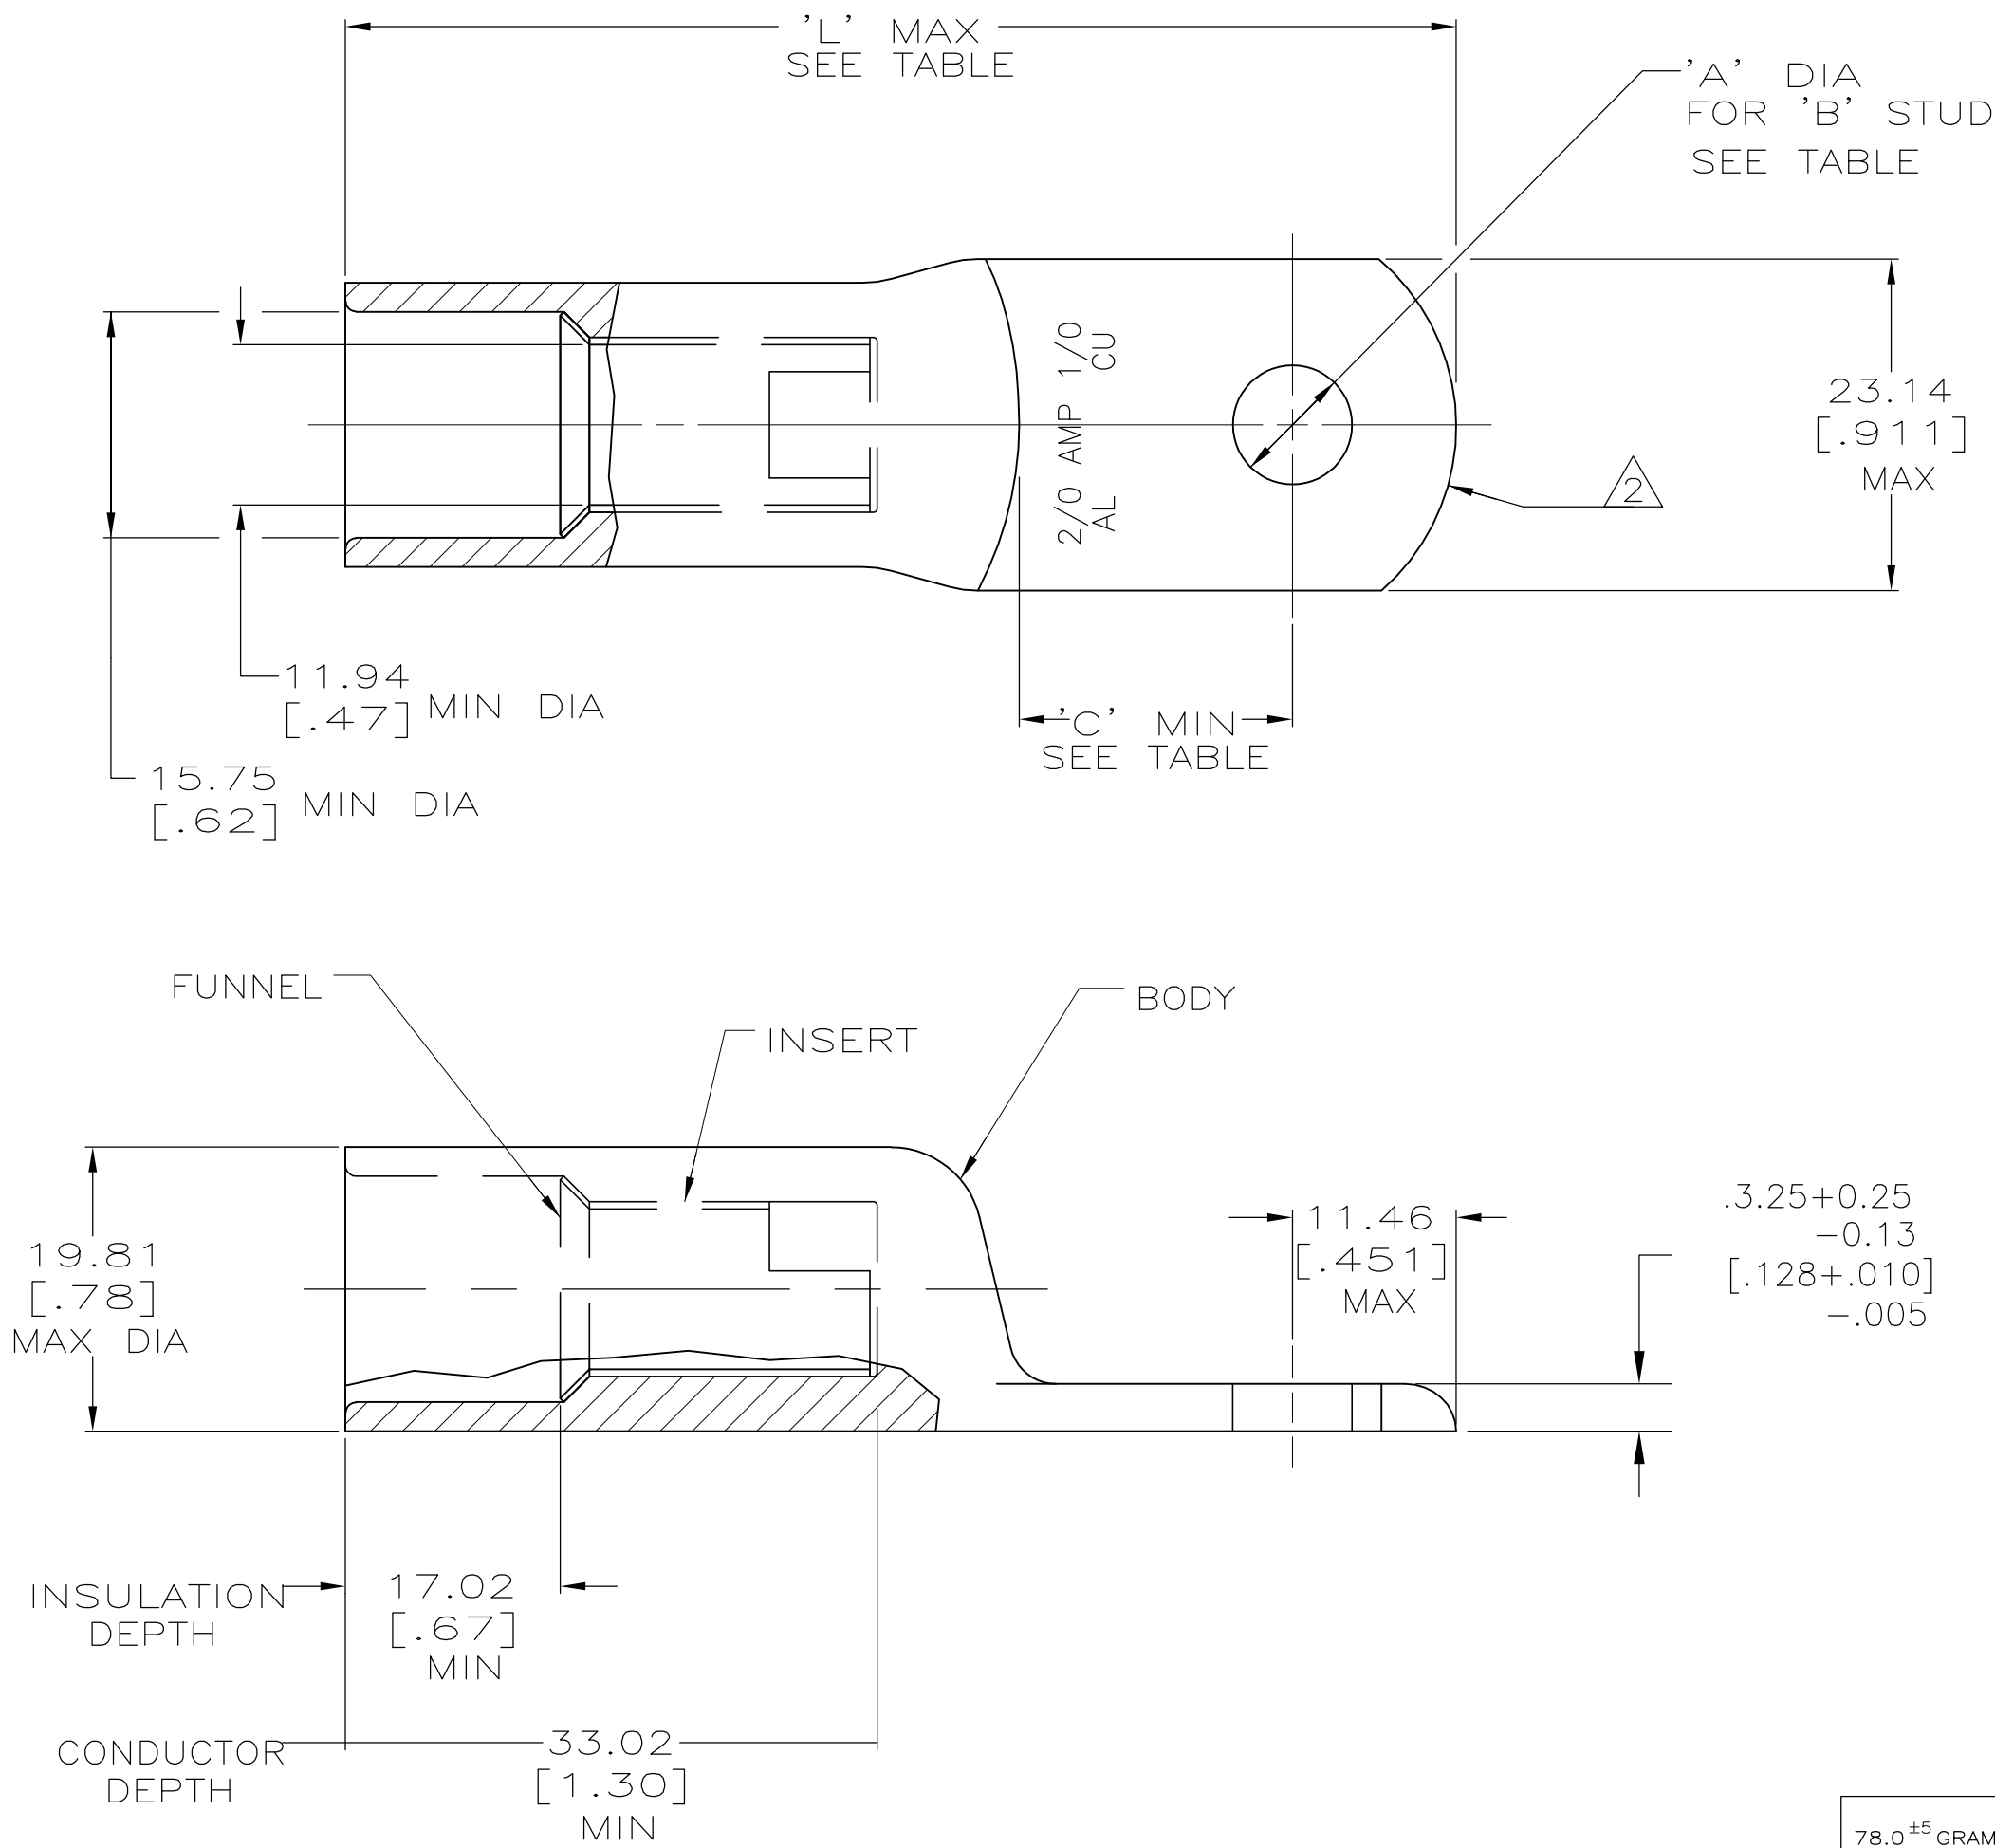


- 1
- WIRE INSULATION: 12.70[.500] — 13.97[.550] DIA
- 2
- THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.



78.0 ±5 GRAMS	13.08 ±0.13 [.515 ±.005]	1/2	77.47 [3.05]	18.03 [.71]	BODY: COPPER ASTM-B187 ANNEALED TIN PL PER MIL-T-10727 0.00381[.000150] MIN THK INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277152-5
81±5 GRAMS	9.91 ±0.13 [.390 ±.005]	3/8				277152-4
80 ±5 GRAMS	8.33 ±0.13 [.328 ±.005]	5/16	277152-3			
76.3 ±5 GRAMS	9.91 ±0.13 [.390 ±.005]	3/8	277152-2			
-	6.73 ±0.13 [.265 ±.005]	1/4	277152-1			
WEIGHT	'A'	'B'	'L'	'C'	MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 6/23/89	 TE Connectivity					
DIMENSIONS: MM [INCHES]		CHK MS FEHER 10/16/90						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME WIRE TERMINAL, RING TONGUE, SEALED COPALUM 71.3mm2 [2/0] ALUMINUM 53.9mm2 [1/0] COPPER				
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -						
MATERIAL SEE TABLE		FINISH SEE TABLE		PRODUCT SPEC 108-11011	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				APPLICATION SPEC 114-2134	A2	00779	C-277152	-
CUSTOMER DRAWING				WEIGHT SEE TABLE		SCALE 2:1		SHEET 1 of 1
				REV L				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[277152-2](#) [277152-3](#)