
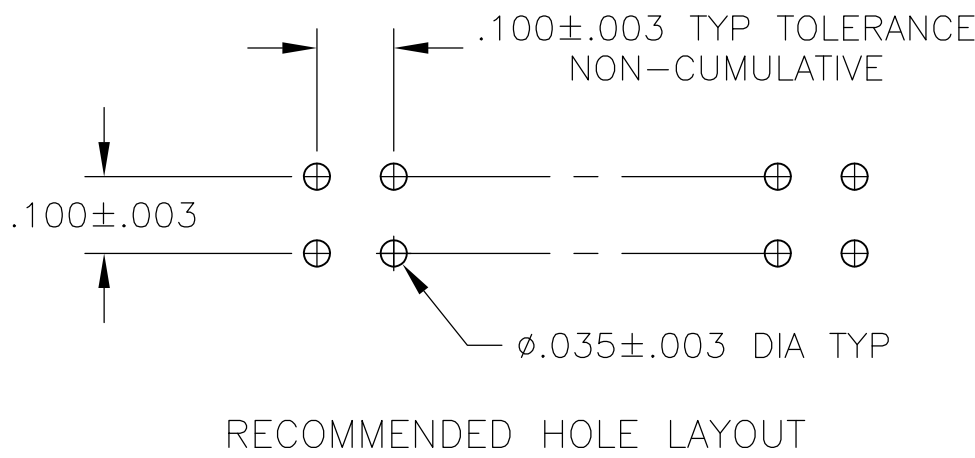
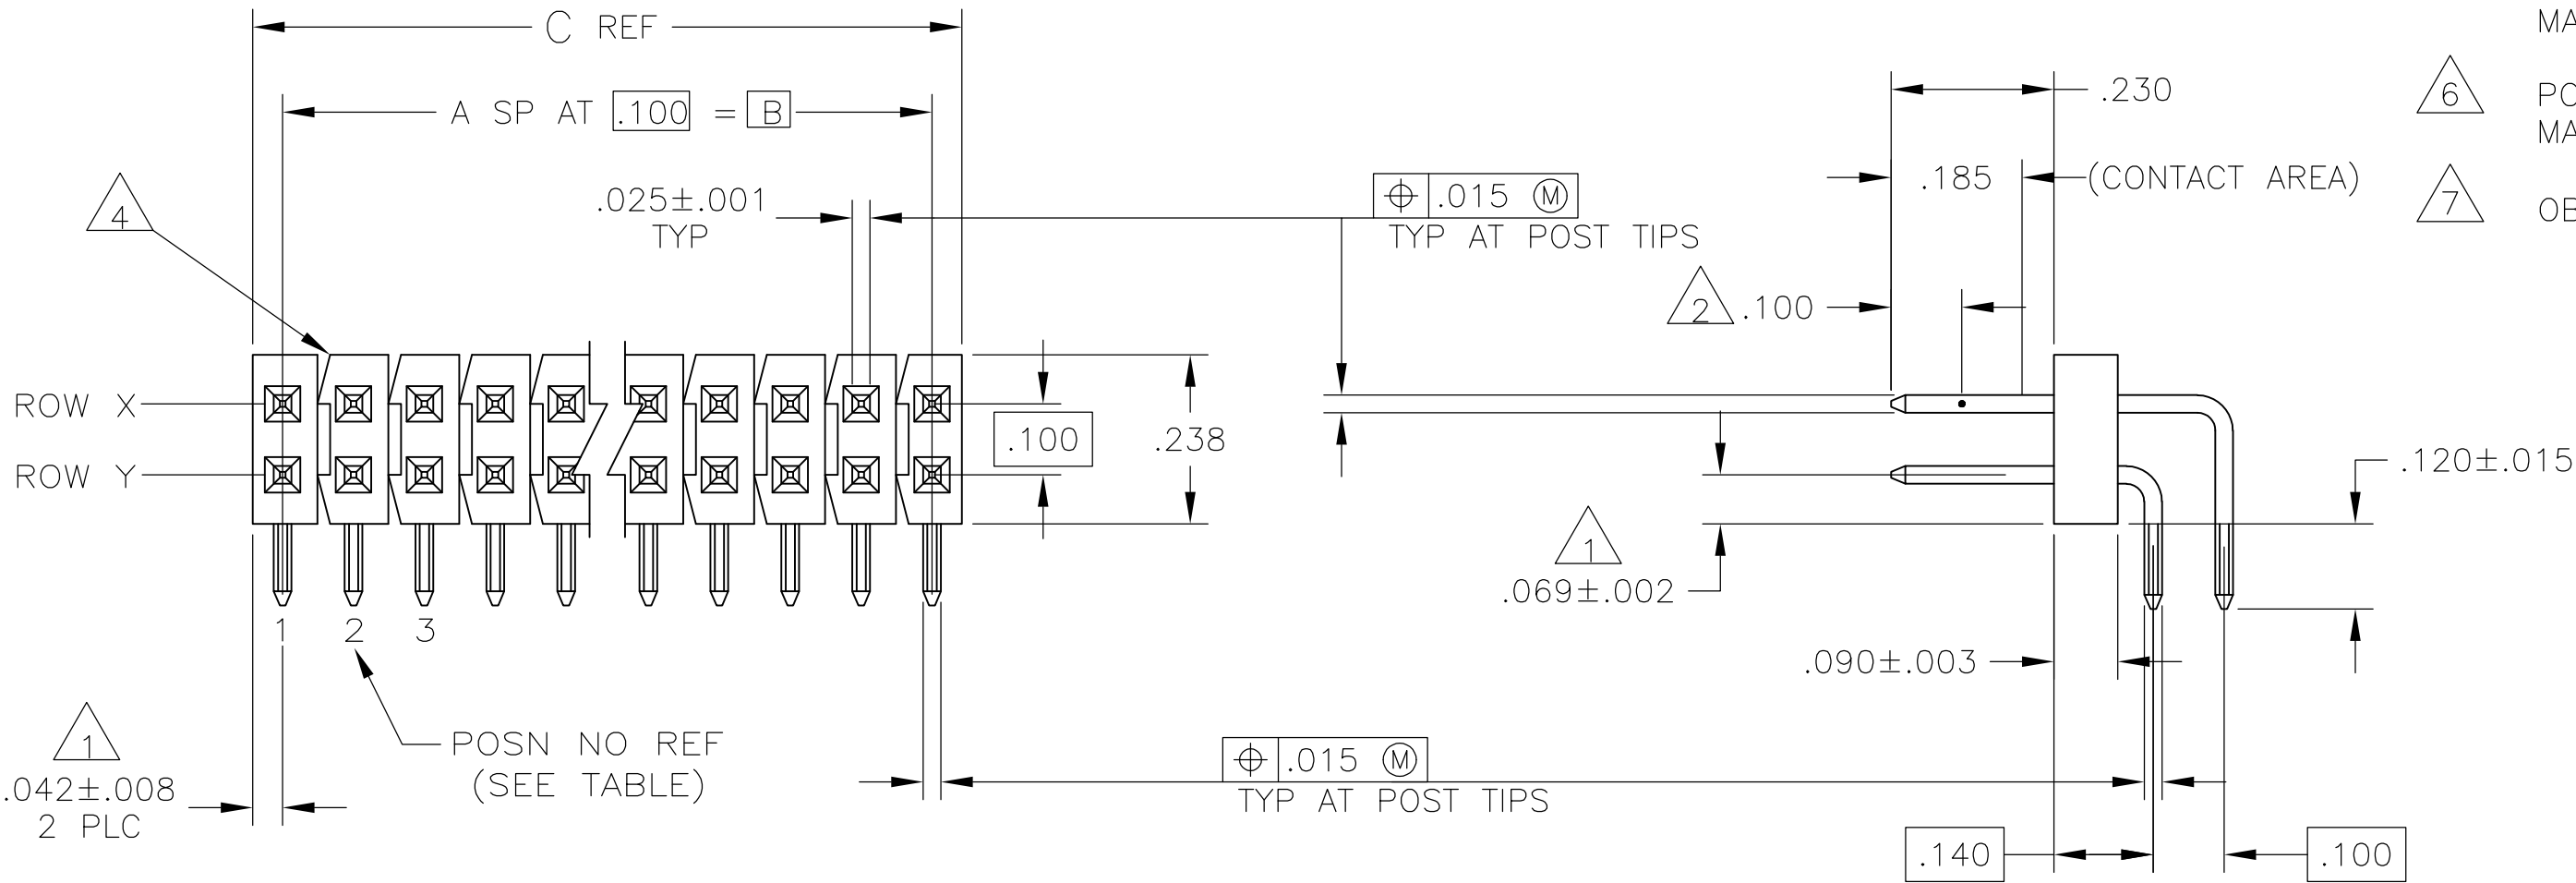


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
AD	00		K	REVISED PER ECO-14-000066	30JUN2014	NK

- 1
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2
- POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3
- OBSOLETE PART NUMBER
- 4
- BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5
- POSTS : .000030 GOLD IN THE CONTACT AREA, .000200 - .000300 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 6
- POSTS : .000030 GOLD IN THE CONTACT AREA, .000200 - .000300 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 7
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



7	OBSOLETE	6	NONE	NONE	50	2.484	2.400	24	50	5-104232-3	
		6	NONE	NONE	80	3.984	3.900	39	80	5-104232-2	
7	OBSOLETE	5	NONE	NONE	50	2.484	2.400	24	50	104232-3	
		5	NONE	NONE	80	3.984	3.900	39	80	104232-2	
	OBSOLETE	5	10	NONE	25	1.284	1.200	12	26	104232-1	
			PLATING	ROW X	ROW Y	ACTIVE NO OF POSN	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
			POSTS OMITTED								

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN H MOLL 24-2-87	 TE Connectivity										
				CHK T. CLARK 27-2-87											
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK 27-2-87	NAME HEADER ASSY, MOD II, BREAKAWAY, RIGHT ANGLE, DOUBLE ROW, .100X.100 C/L, W/ .025 SQ POSTS										
		0 PLC ± -		PRODUCT SPEC											
		1 PLC ± -		—											
		2 PLC ± -		APPLICATION SPEC											
		3 PLC ± .005		—											
		4 PLC ± -		WEIGHT	SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO				
MATERIAL HOUSING : GLASS FILLED THERMOPLASTIC (THAT WILL WITHSTAND VAPOR PHASE REFLOW) COLOR : BLACK POSTS : COPPER ALLOY		FINISH		—	A2		00779		C-104232		—				
SEE TABLE				CUSTOMER DRAWING				SCALE		4:1		SHEET 1 of 1		REV K	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-104232-2](#)