



DESCRIPTION: 97 SERIES SOLDER STYLE PANEL & CABLE MOUNT  
D-SUB CONNECTORS

MODEL NUMBER: 40-97XXS

APPLICATION: FOR CABLE

CRIMP TOOL: N/A


IMPEDANCE: N/A

FREQUENCY RANGE: 0-15 MHz

MATERIAL: HOUSING STEEL NICKEL PLATED  
INSULATOR PBT+FIBER-GLASS UL94-V0 WHITE  
CONTACT COPPER-ALLOY, GOLD PLATED

RoHS COMPLIANCE: YES

TECHNICAL DETAIL: N/A

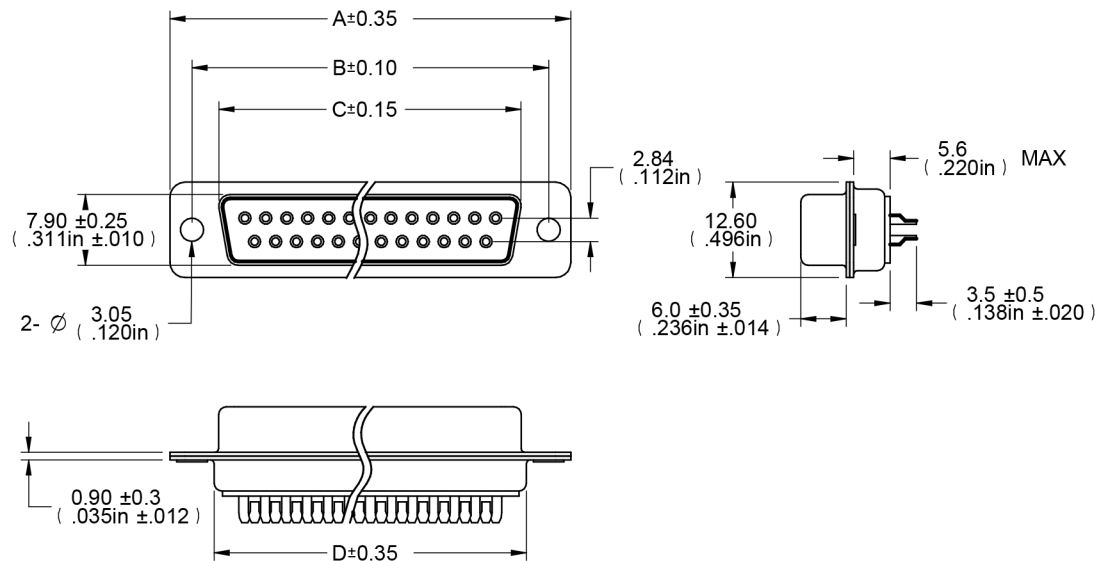

**DIM OUTLINE**

MODEL NUMBER	PIN	A	B	C	D
40-9709S	09	30.80	24.99	16.30	19.20
40-9715S	15	39.15	33.32	24.65	27.70
40-9725S	25	53.00	47.04	38.40	41.10
40-9737S	37	69.30	63.50	54.80	57.30

	3RD ANGLE PROJECTION 	<b>AIM-Cambridge</b>	
	RoHS <input checked="" type="checkbox"/> 2002/95/EC	Title: D-Sub Connector, 97 Series, Solder Style Panel and Cable Mount, Female	
<small>UNLESS OTHERWISE SPECIFIED UNITS: METRIC</small>		Model No. <b>40-97XXS</b>	
<small>Size A</small>		<small>DO NOT SCALE DRAWING</small>	<small>Date:</small> 9/9/2013
<small>Sheet 1 of 1</small>		<small>Sheet 1 of 1</small>	

5e144200094aed  
25220000001194  
09  
2013.09.09  
11:56:10 +0800

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be tracked or copied without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[40-9737S](#)