
Rating	20A 277VAC,1HP 277VAC 1/2HP 125VAC c % Us	Mounting Hole	Circuit
	10(4)A 250V~25T85 图 企	1.1	
Contact Resistance	50m ohm Max	015.5 to 0.1.5 ± 0.1.0	
Insulation Resistance	DC 500V 100M ohm Min	-	_
Dielectric Strength	AC 1500V 1 minute	(\;+	•
Operation Temperature	0°C~85°C		3 2 1
Switch Function	3P SPDT ON-ON	11.0±0.1	

Waterproof: IP56



RoHS Compliant

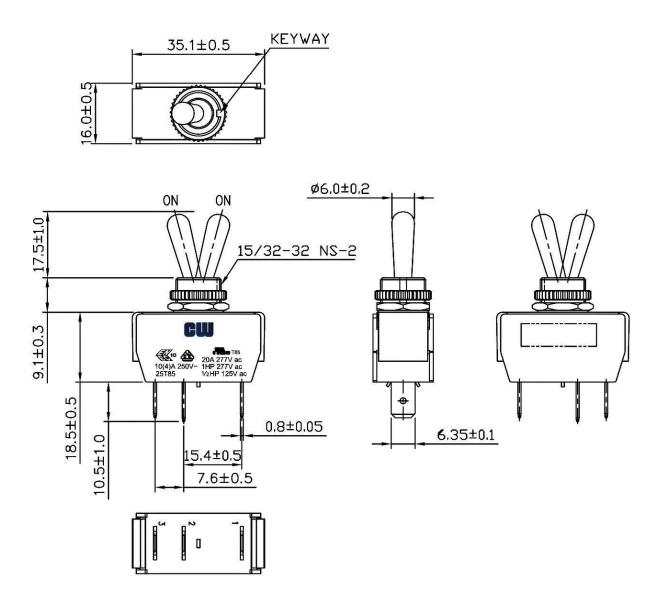

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CW Industries: GTS447C101HR