


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0643231219](#)
Status: **Active**
Overview: CMC and CMX Sealed, Hybrid, Modular Connectors
Description: 1.50mm CMC CP Female Terminal, Tin plated; Selective 1.27µm Gold in Contact Area, for Tab Dimensions 1.5mm x 0.8mm, Wire Size > 1.0mm² -2.0mm²

Documents:

3D Model	Application Specification AS-64323-001-CH-001 (PDF)
Drawing (PDF)	Application Specification AS-64323-001-FR-001 (PDF)
Product Specification PS-64319-002-001 (PDF)	Application Specification AS-98420-001-001 (PDF)
Application Specification AS-64318-002-001 (PDF)	Application Specification AS-98420-001-CH-001 (PDF)
Application Specification AS-64318-002-CH-001 (PDF)	Application Specification AS-98420-001-FR-001 (PDF)
Application Specification AS-64318-002-FR-001 (PDF)	Application Specification AS-98420-001-SP-001 (PDF)
Application Specification AS-64318-002-SP-001 (PDF)	Application Specification AS-98420-002-001 (PDF)
Application Specification AS-64319-002-001 (PDF)	Application Specification AS-98420-002-CH-001 (PDF)
Application Specification AS-64319-002-CH-001 (PDF)	Application Specification AS-98420-002-FR-001 (PDF)
Application Specification AS-64319-002-FR-001 (PDF)	Application Specification AS-98420-002-SP-001 (PDF)
Application Specification AS-64319-002-SP-001 (PDF)	Packaging Specification PK-98915-001-001 (PDF)
Application Specification AS-64323-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

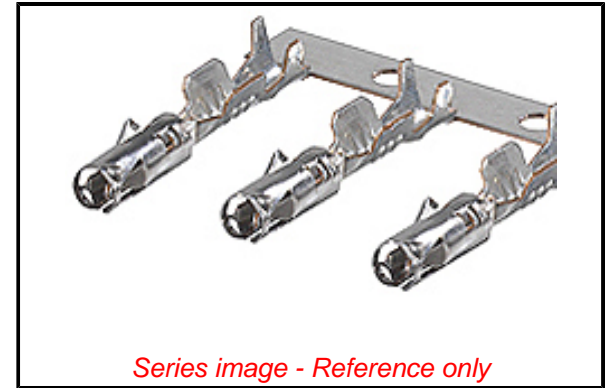

EU ELV
Compliant

EU RoHS
Compliant
REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free
Status
Not Relevant

For more information, please visit [Contact US](#)

China ROHS	Not Relevant
ELV	Compliant
RoHS Phthalates	Not Contained

General

Product Family	Crimp Terminals
Series	64323
Application	Power, Wire-to-Wire
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 12A for 1.50mm Terminal (2.00mm ² wire) *
Crimp Quality Equipment	Yes
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC, CP Terminal
UPC	883906129606

Physical

Gender	Female
Material - Metal	High Copper
Material - Plating Mating	Tin
Material - Plating Termination	Gold
Net Weight	0.290/g
Packaging Type	Reel
Plating min - Mating	1.016µm, 3.048µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	2.10mm-2.80mm
Wire Size AWG	14, 16
Wire Size mm ²	> 1.00-2.00

Electrical

Current - Maximum per Contact	12.0A
-------------------------------	-------

Search Parts in this Series
64323 Series

Mates With
CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Use With
CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Voltage - Maximum 14V DC

Solder Process Data

Lead-free Process Capability N/A

Material Info

Reference - Drawing Numbers

Application Specification AS-64318-002-001, AS-64318-002-CH-001,
AS-64318-002-FR-001, AS-64318-002-SP-001,
AS-64319-002-001, AS-64319-002-CH-001,
AS-64319-002-FR-001, AS-64319-002-SP-001,
AS-64323-001-001, AS-64323-001-CH-001,
AS-64323-001-FR-001, AS-98420-001-001,
AS-98420-001-CH-001, AS-98420-001-FR-001,
AS-98420-001-SP-001, AS-98420-002-001,
AS-98420-002-CH-001, AS-98420-002-FR-001,
AS-98420-002-SP-001

Packaging Specification PK-98915-001-001

Product Specification PS-64319-002-001

Sales Drawing SD-64323-001-000

This document was generated on 10/25/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[64323-1219](#)