


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A15		REVISED PER ECO-11-002569	25FEB2011	DLD	DCM
A16		REVISED PER ECO-14-011102	22JUL2014	DLD	DCM




PART NUMBER:
1438691-1
SHOWN WITH SPACER
IN SEATED POSITION
SCALE 2:1


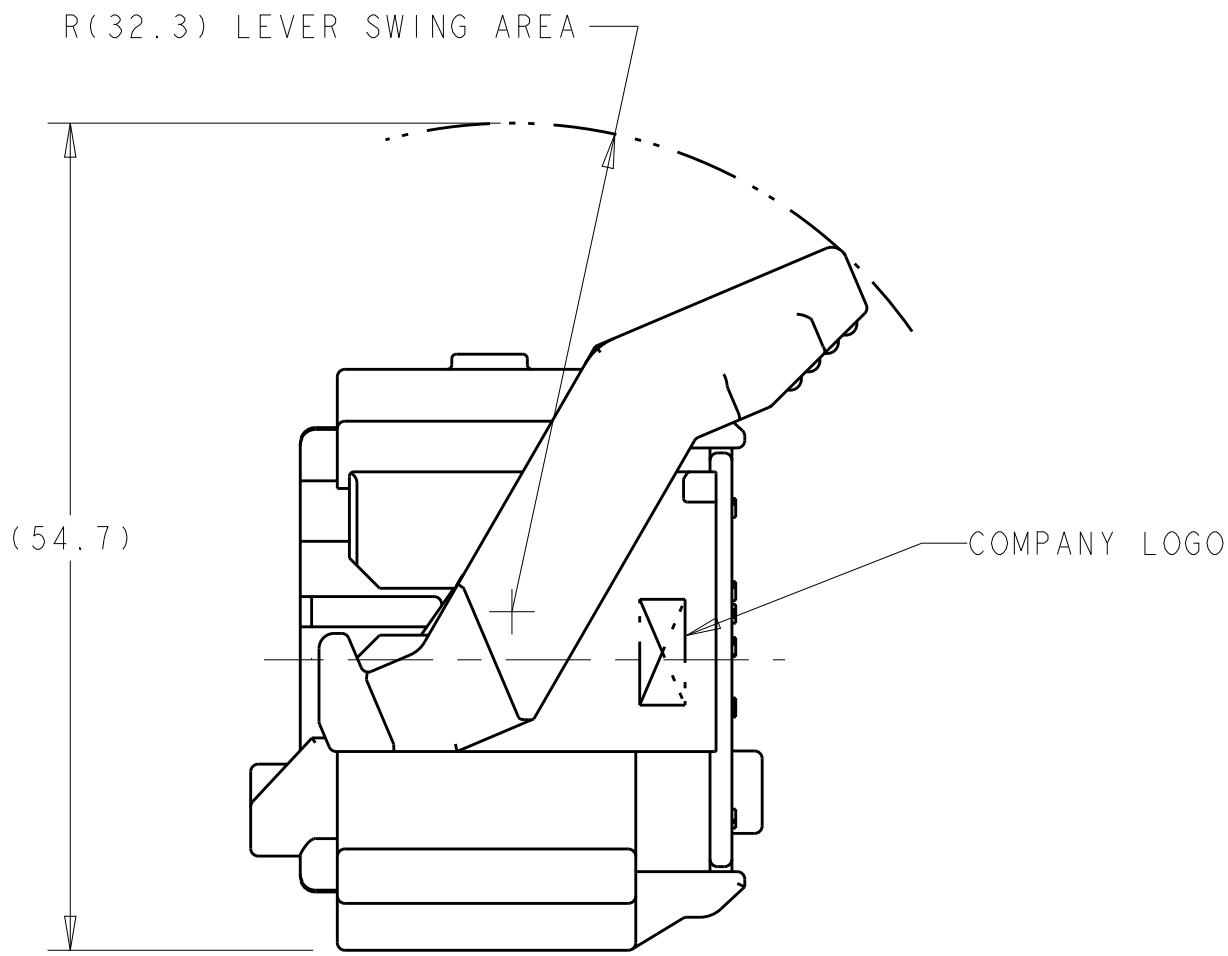


SHOWN WITH SPACER IN SEATED POSITION

- ⚠️ PRINT TE PART NUMBER AND TRACEABILITY (YY : 2 DIGIT YEAR, JJJ = JULIAN DATE, HH = 2 DIGIT MILITARY HOUR CODE) IN THE LOCATION AT ASSEMBLY.
- ⚠️ OPTIONAL WIRE SHIELD PART NUMBERS (SOLD SEPARATELY) 1438126, 1438180, 1488373, AND 1488572. CONTACT TE ENGINEERING FOR MINIMUM FEED THRU CONDITION.
3. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY) FOR TIN APPLICATIONS: 1393367 AND 1393366. FOR GOLD APPLICATIONS: 1393365 AND 1393364 FOR TERMINATION AND REELING OPTIONS SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
4. APPLICABLE MOLEX (1.5) POWER TERMINAL PART NUMBERS: 33012-0002 TIN 0.50-1.50mm²
5. CAM LEVER AND SPACER ARE SHIPPED IN THEIR PRE-ASSEMBLED POSITIONS.
6. REFERENCE TE INSTRUCTION SHEET 408-8893.

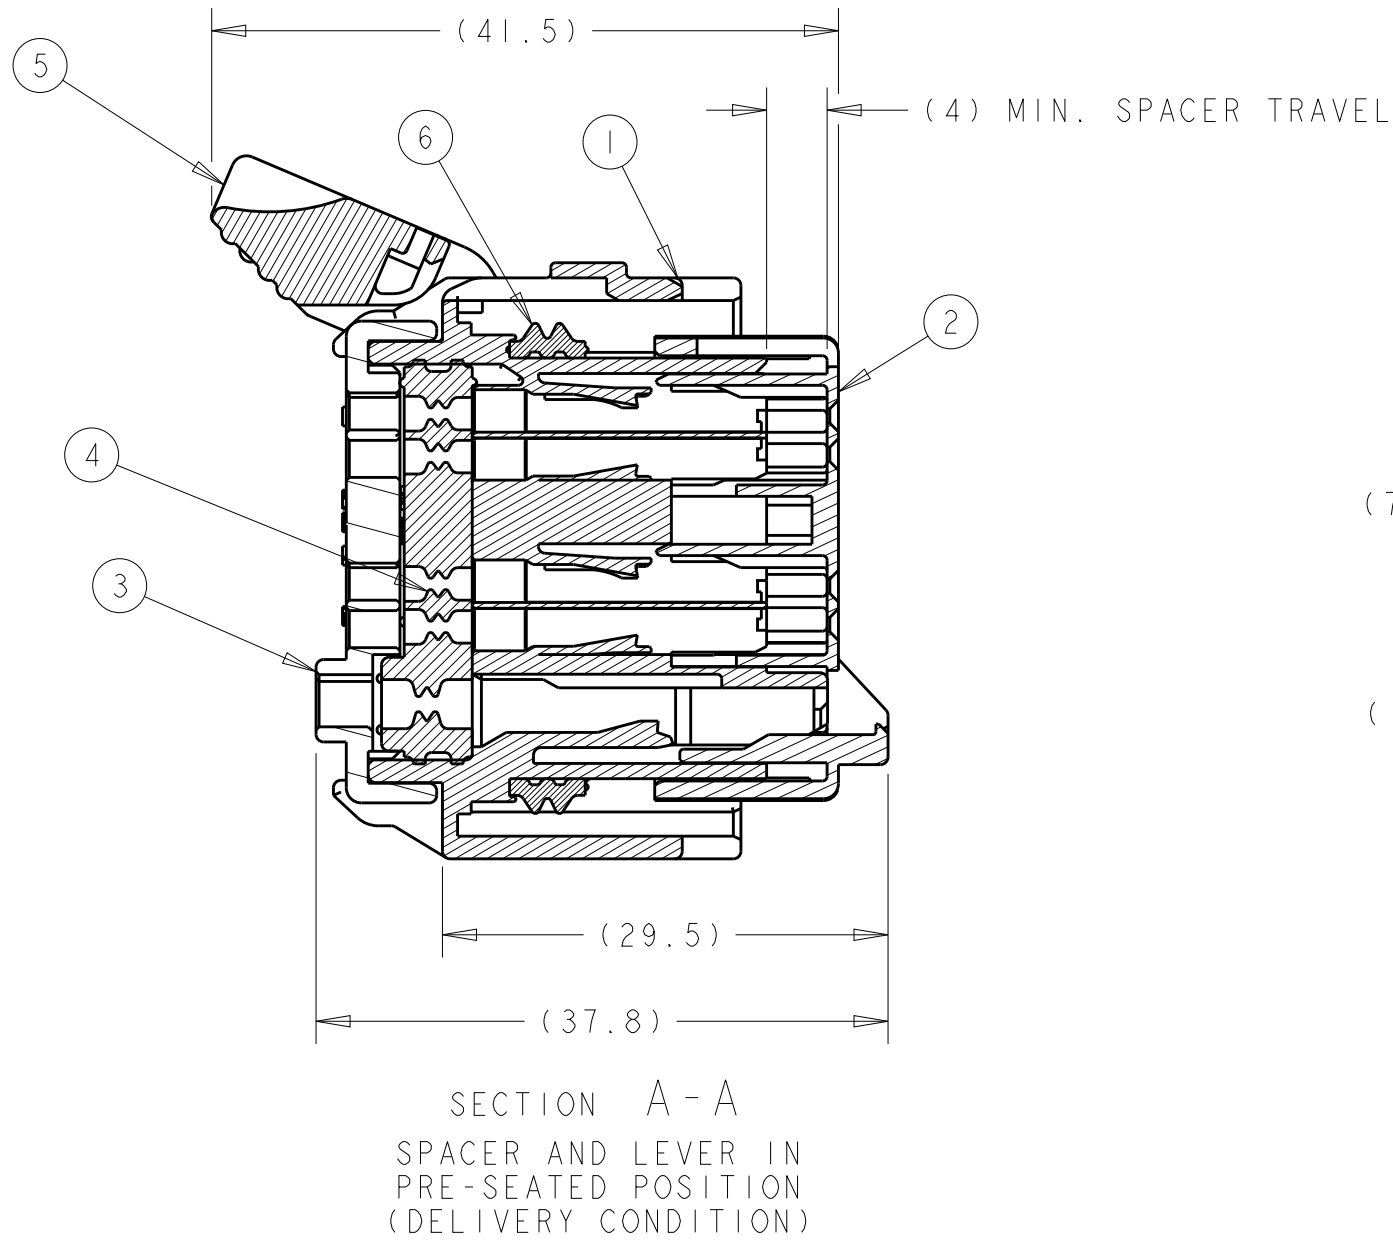

SECTION A-A
SPACER AND LEVER IN
PRE-SEATED POSITION
(DELIVERY CONDITION)

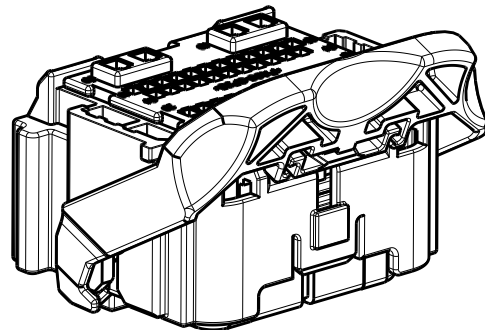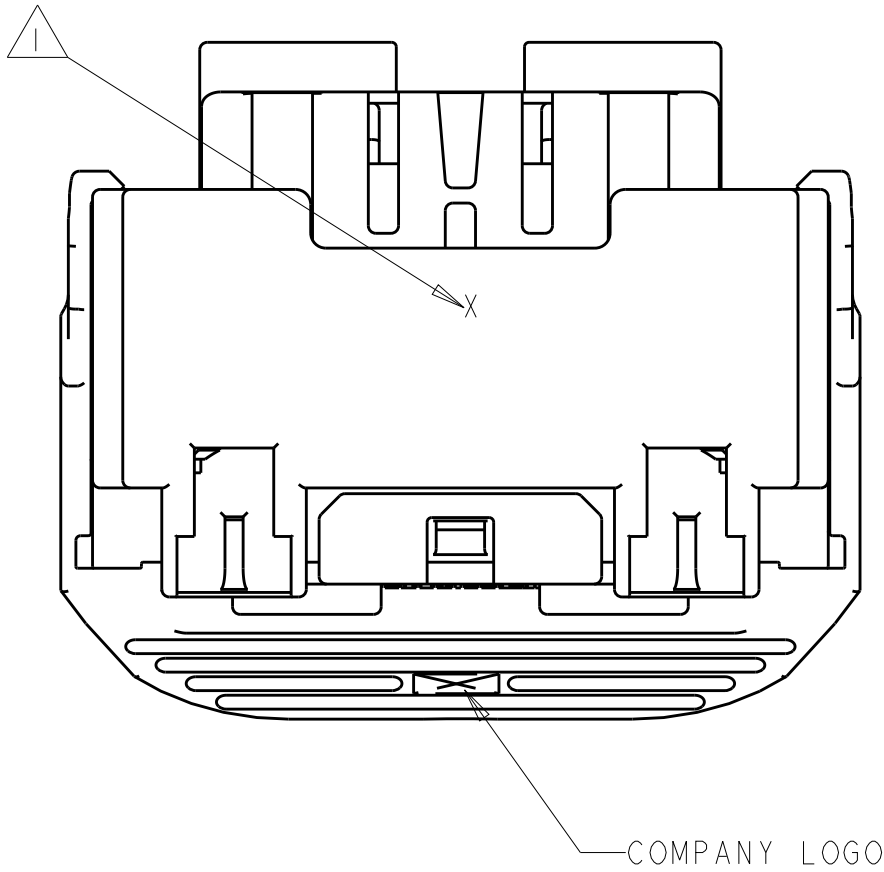




SCALE 1:1

GREEN	PERIMETER SEAL	6
GRAY	LEVER	5
BROWN	GROMMET SEAL	4
BLACK	COVER	3
RED	SPACER	2
BLACK	HARNESS, KEY "A"	1
PART COLOR	DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CRISAMORE 21JUL2004	NAME	
DIMENSIONS:		CHK M. HITCHCOCK 21JUL2004	TE Connectivity ASSEMBLY, 50-WAY, KEY A, PCM HARNESS	
mm		APVD C. MARTIN 21JUL2004		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0 PLC ±.3		APPLICATION SPEC	SIZE	
1 PLC ±0.10		WEIGHT	CAGE CODE	
2 PLC ±.10		Customer Drawing	DRAWING NO	
3 PLC ±.10			RESTRICTED TO	
4 PLC ±.10			A100779C=1438691	
ANGLES ±.1°			SCALE	
FINISH			2:1	
MATERIAL			SHEET	
-			1 OF 4	
-			REV	
			A16	

APPLICABLE HEADER INTERFACE SPECIFICATION
SHOWN WITHOUT KEYING OPTIONS




REVISIONS				
P	LTR	DESCRIPTION	DATE	OWN APVD
-	-	SEE SHEET 1	-	-

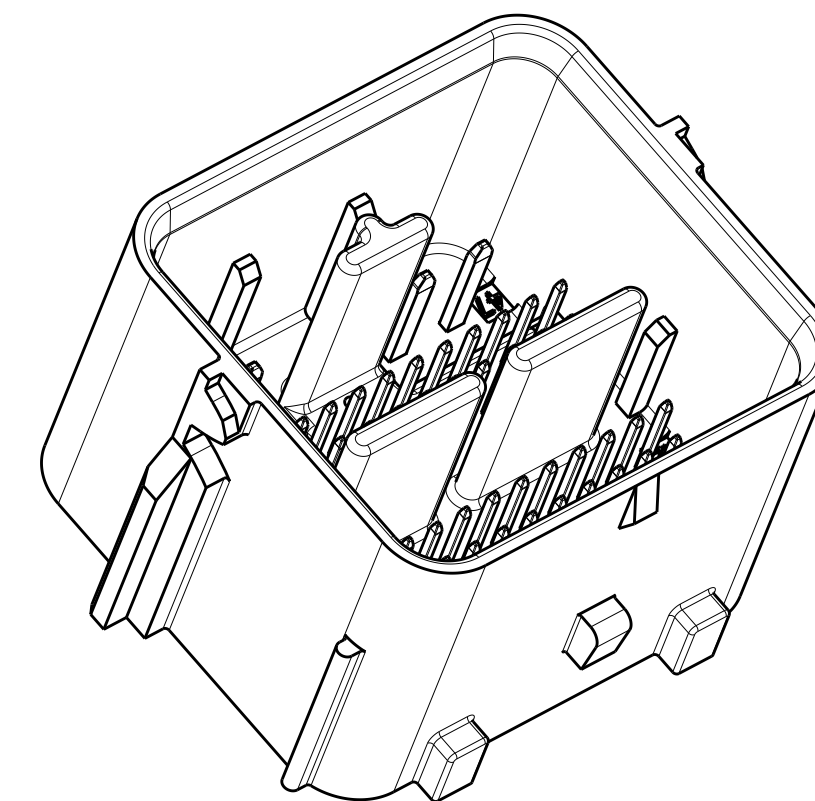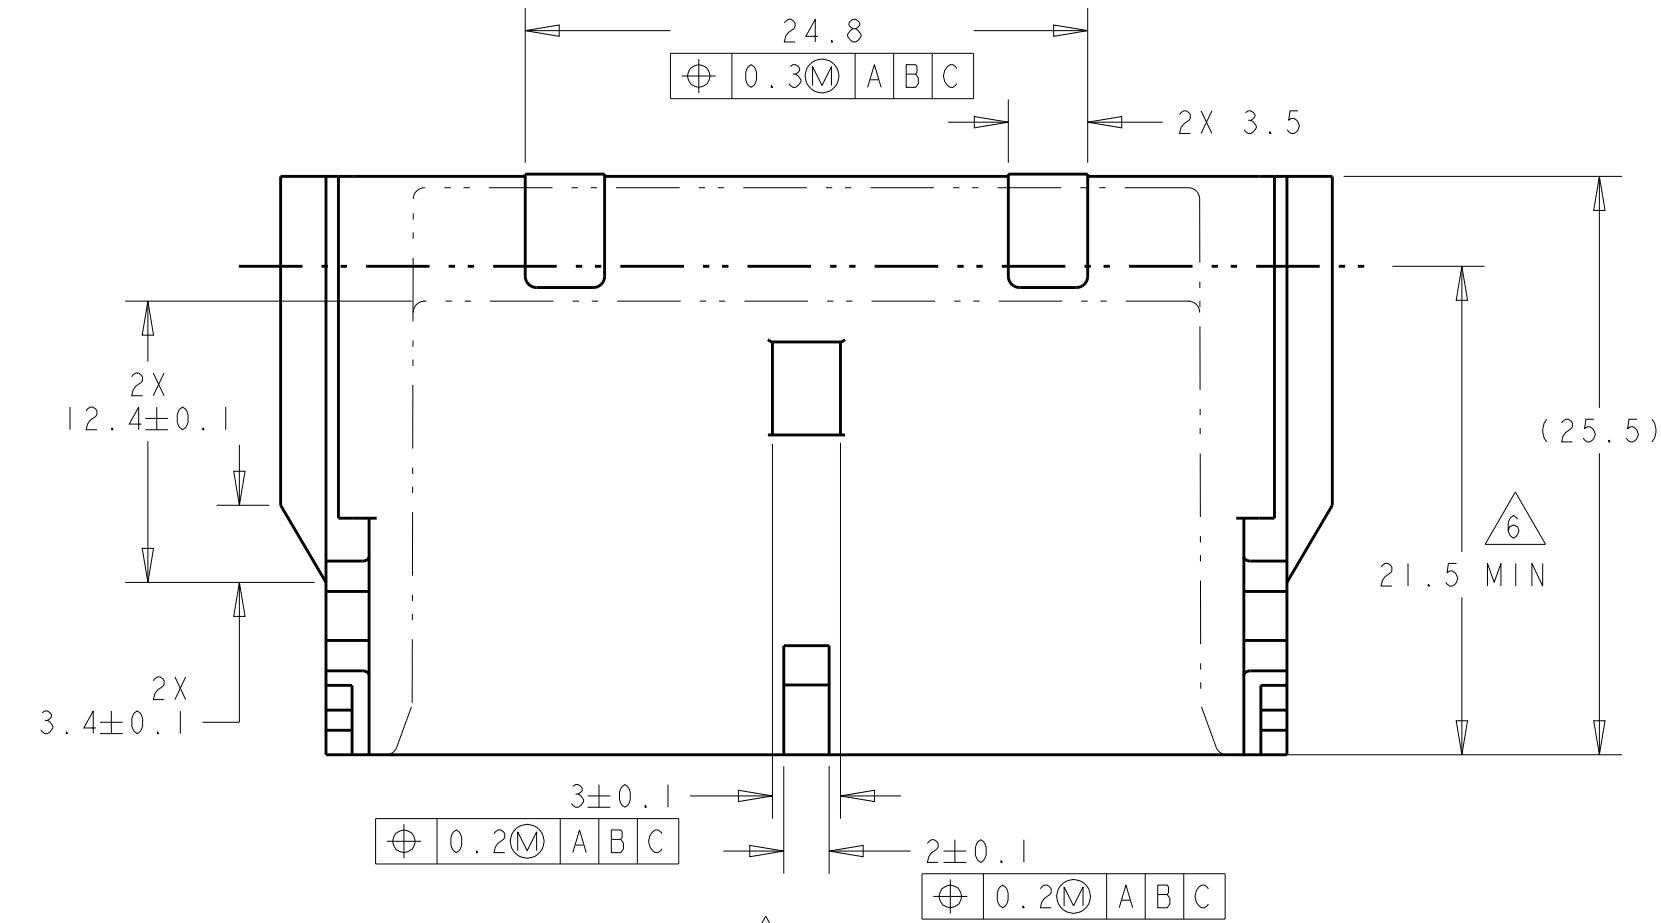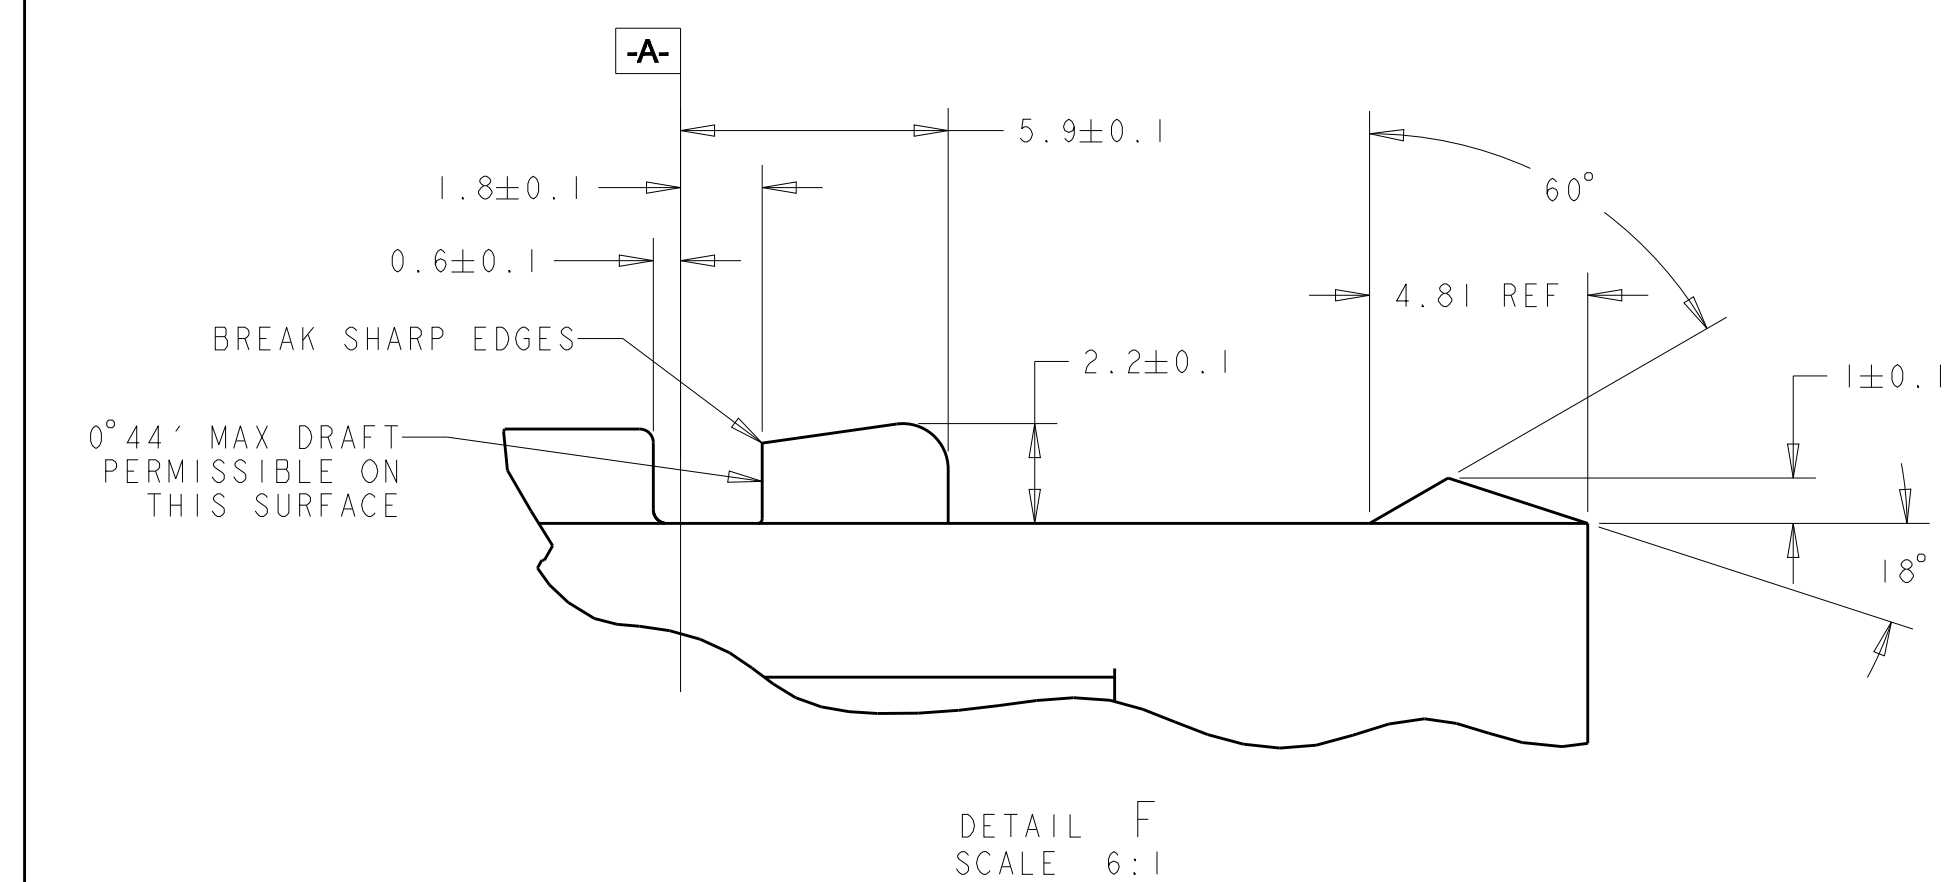



SCALE 2:1

NOTES: UNLESS OTHERWISE SPECIFIED


1. GENERAL TOLERANCE:
±0.3 ALL ONE PLACE DIMENSIONS
±0.10 ALL TWO PLACE DIMENSIONS
±1°00' ALL ANGULAR DIMENSIONS
2. DRAFT ANGLE PERMISSIBLE ONLY WITHIN DRAWING TOLERANCE.
3. SEALING SURFACE, NO WITNESS LINES OR DAMAGE PERMITTED.
4. ALL UNMARKED RADI TO BE 0.5 MAX., UNLESS OTHERWISE SPECIFIED.
5. VENT HOLE SIZE AND LOCATION IS OPTIONAL.
6. THIS AREA TO REMAIN CLEAR FOR THE HARNESS ASSEMBLY.
7. TERMINAL POSITION IDENTIFICATION.

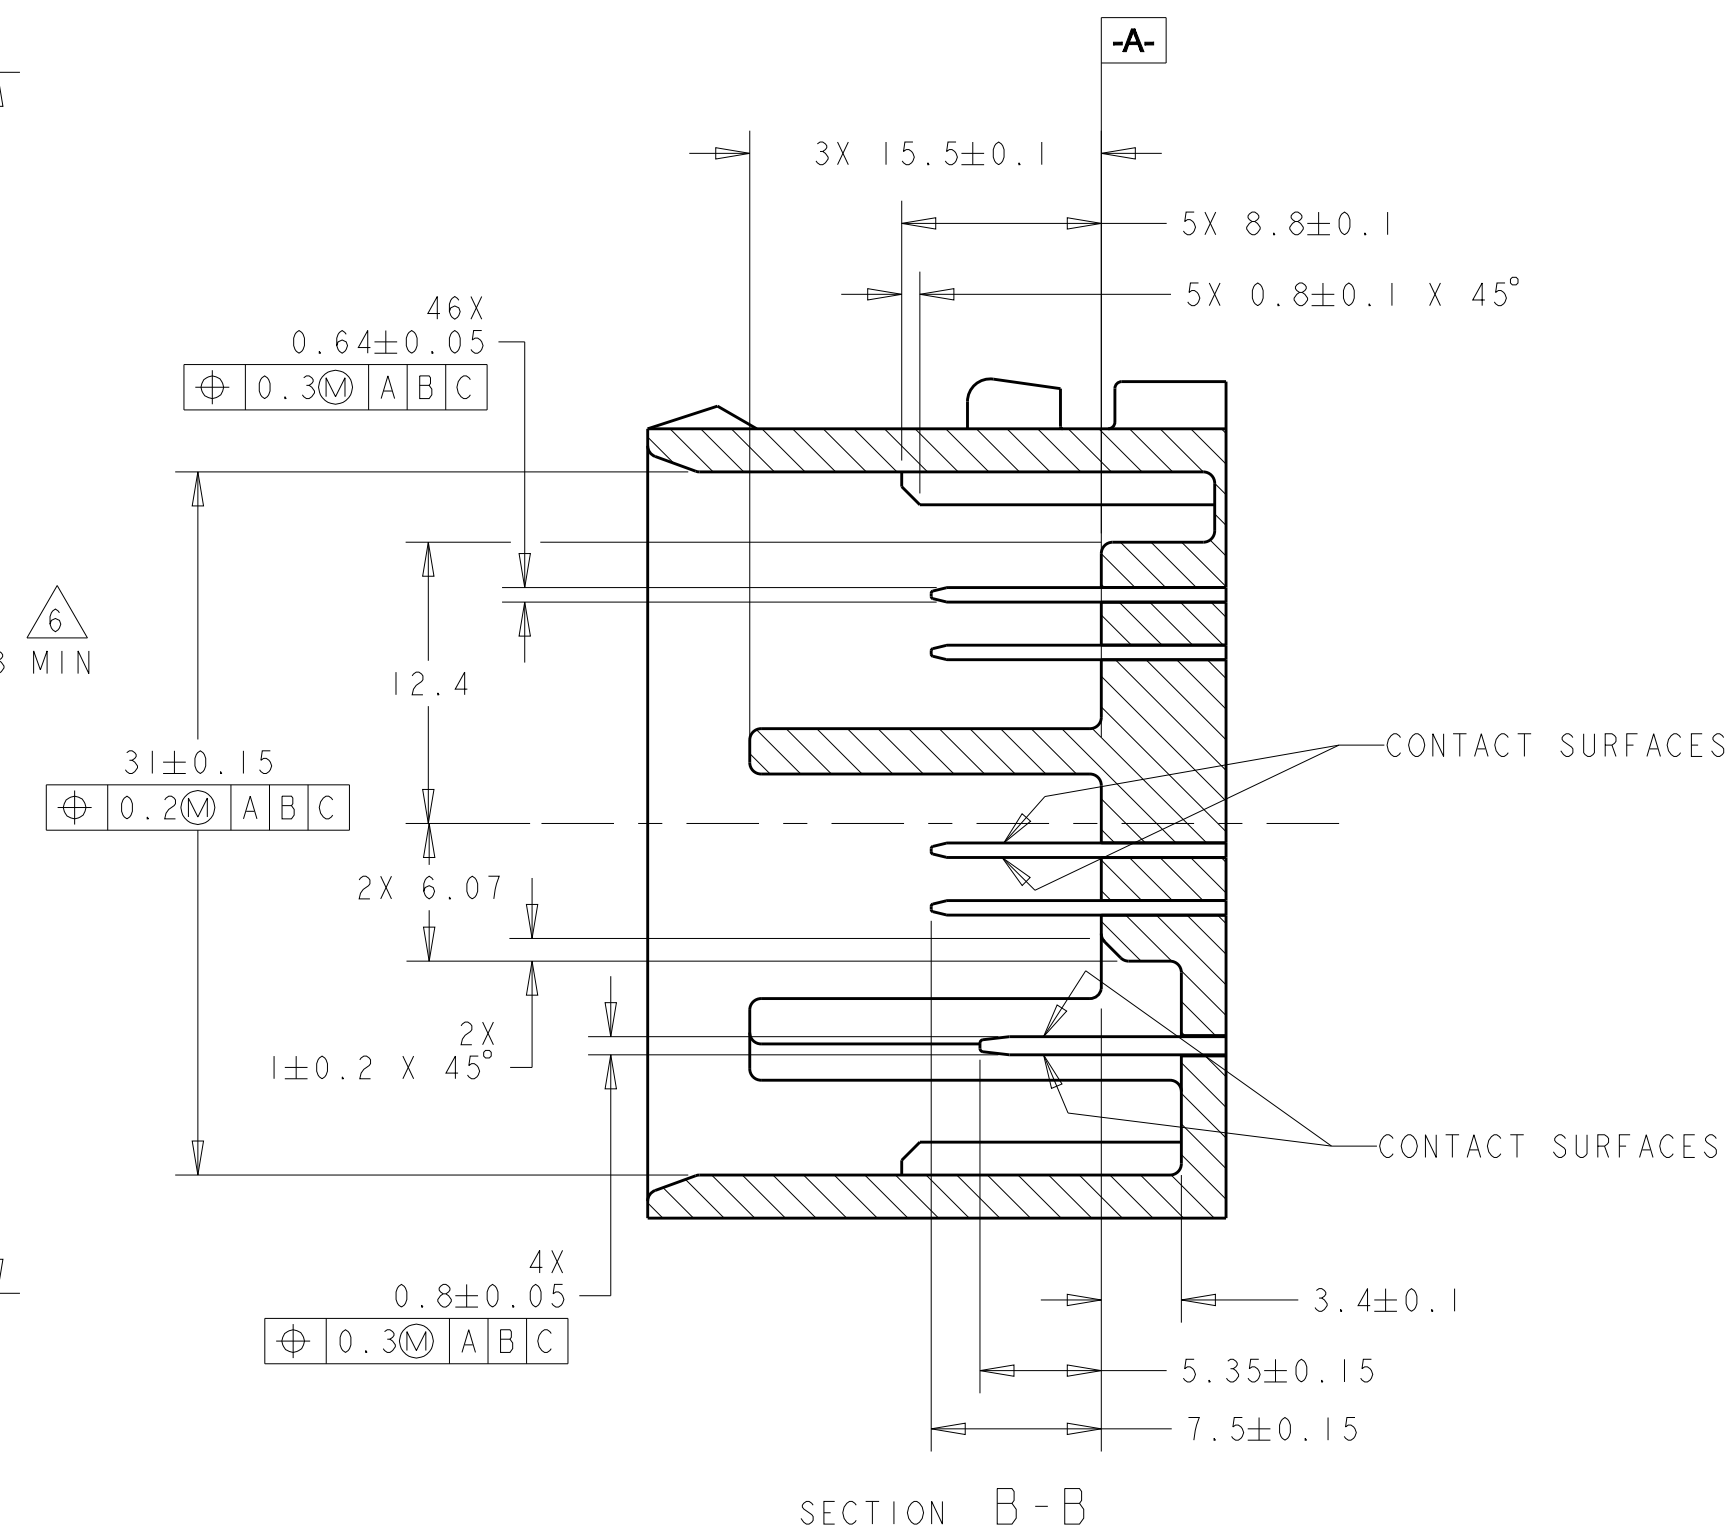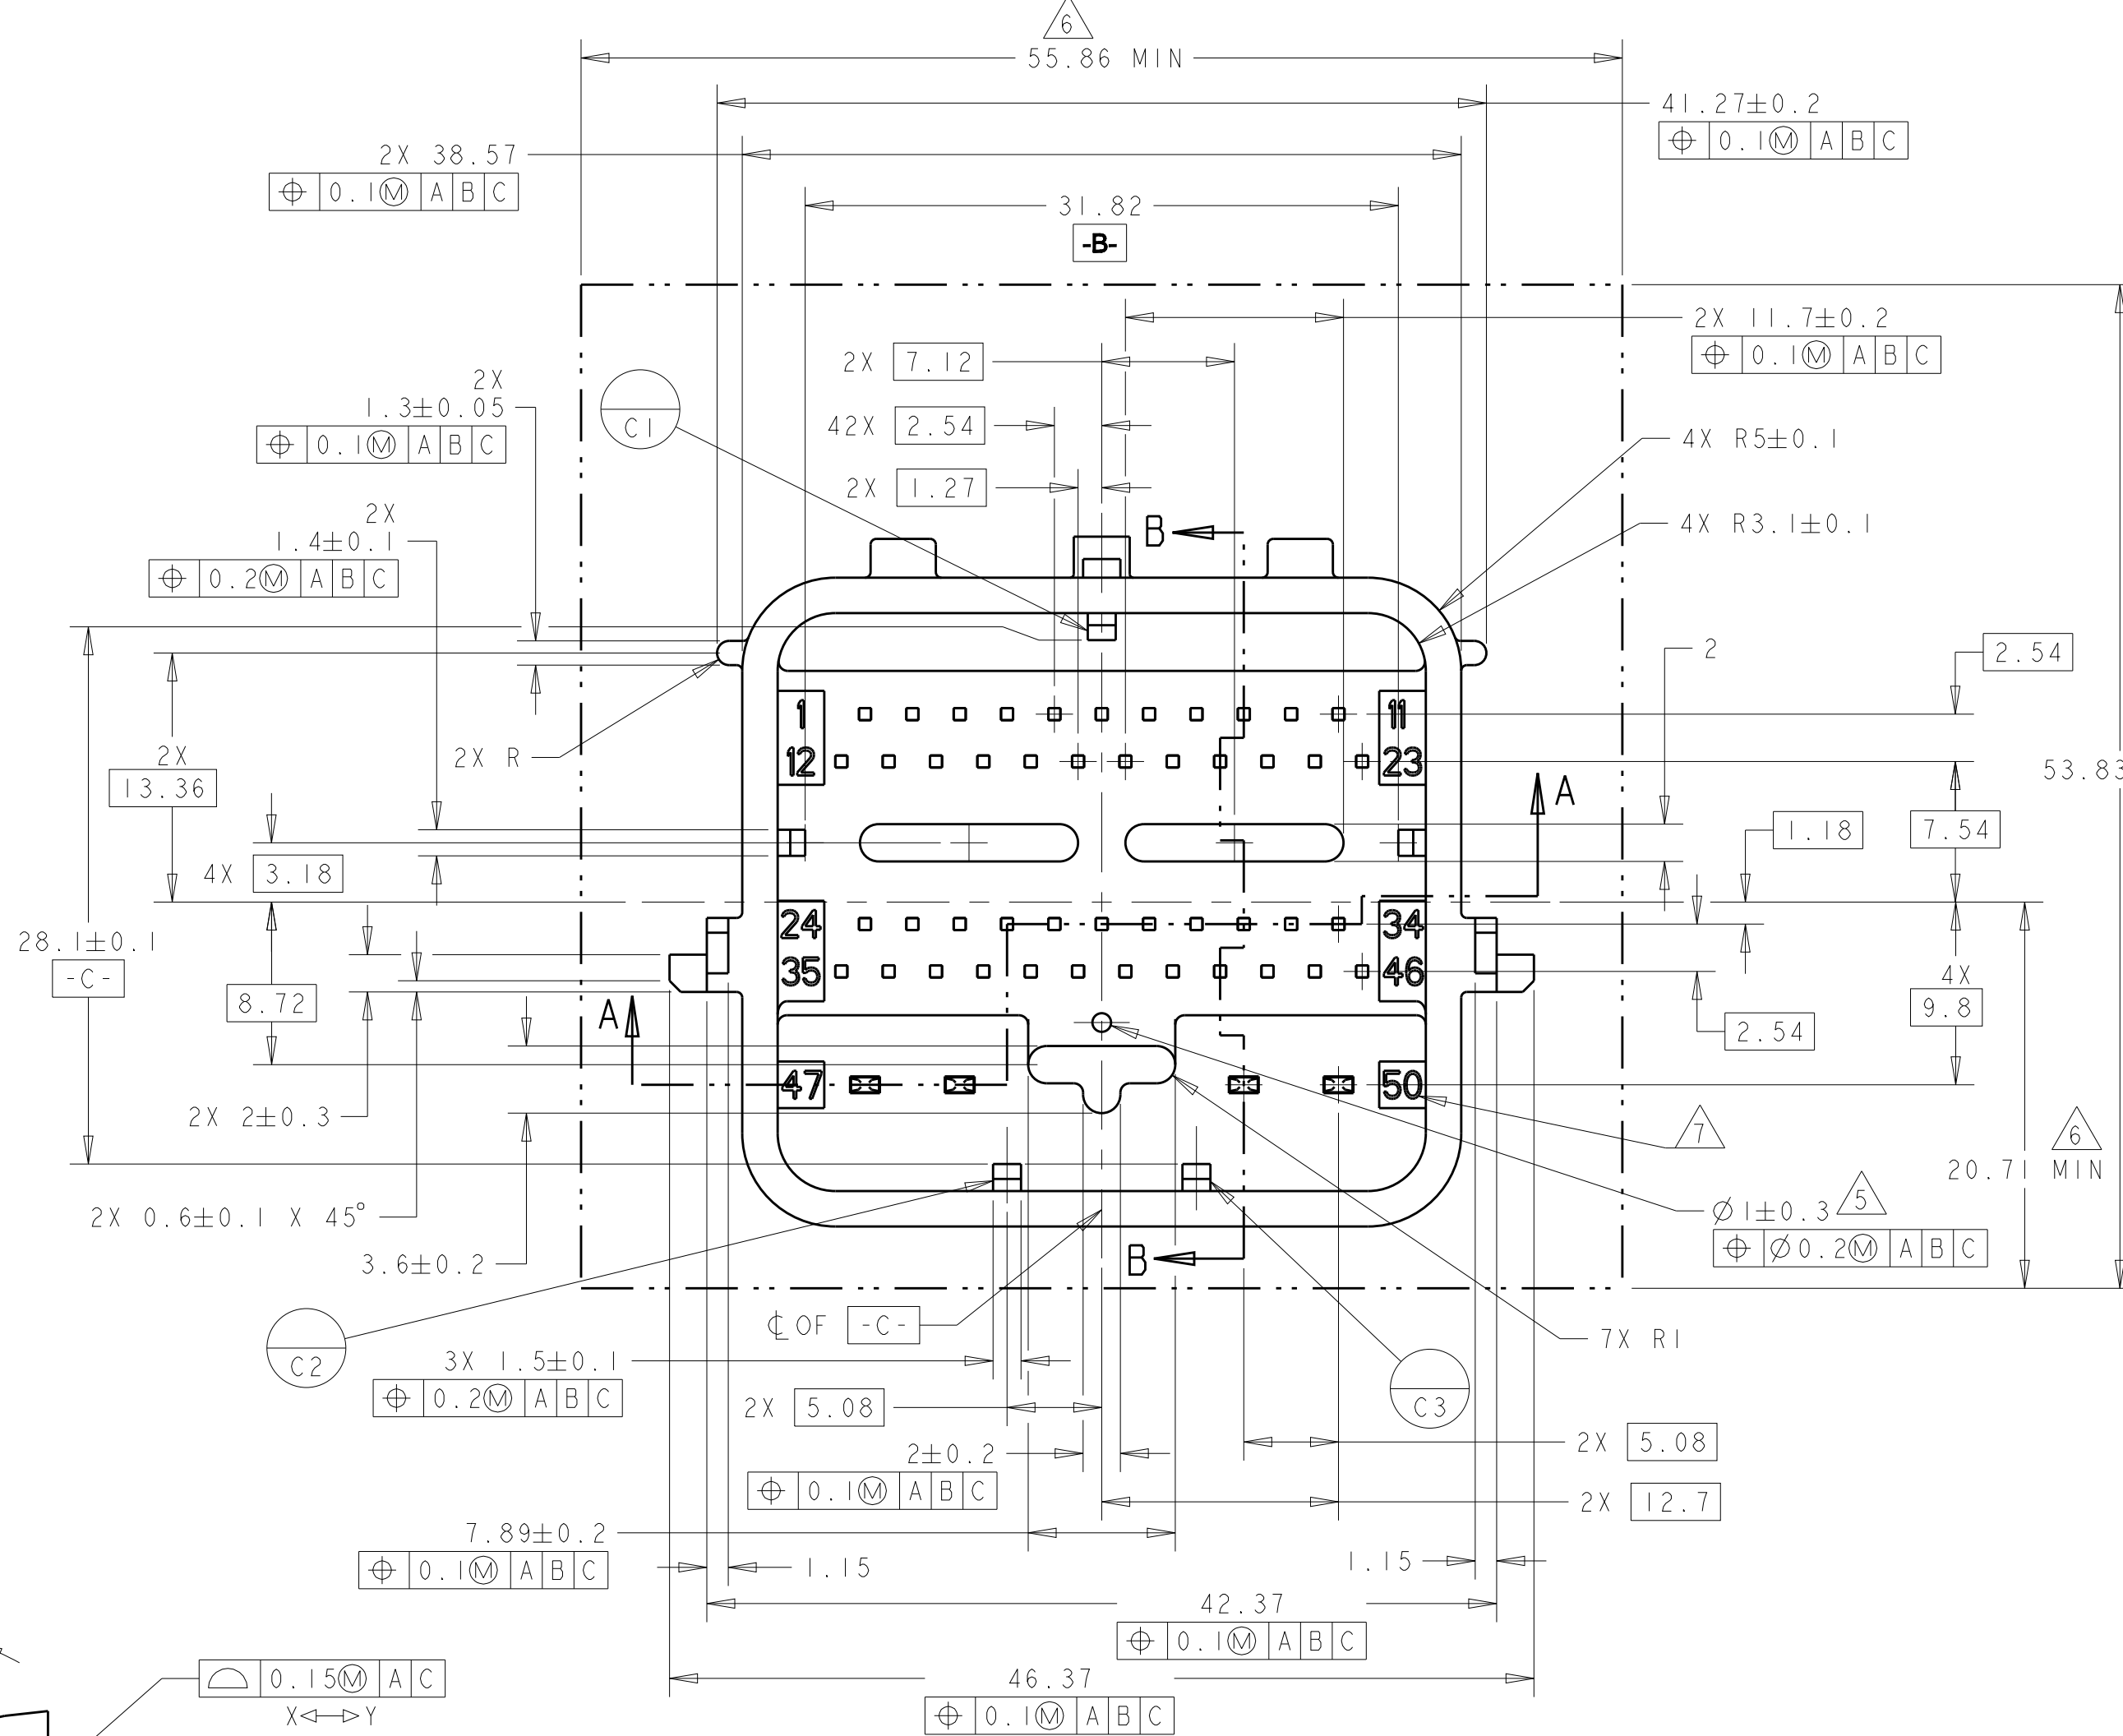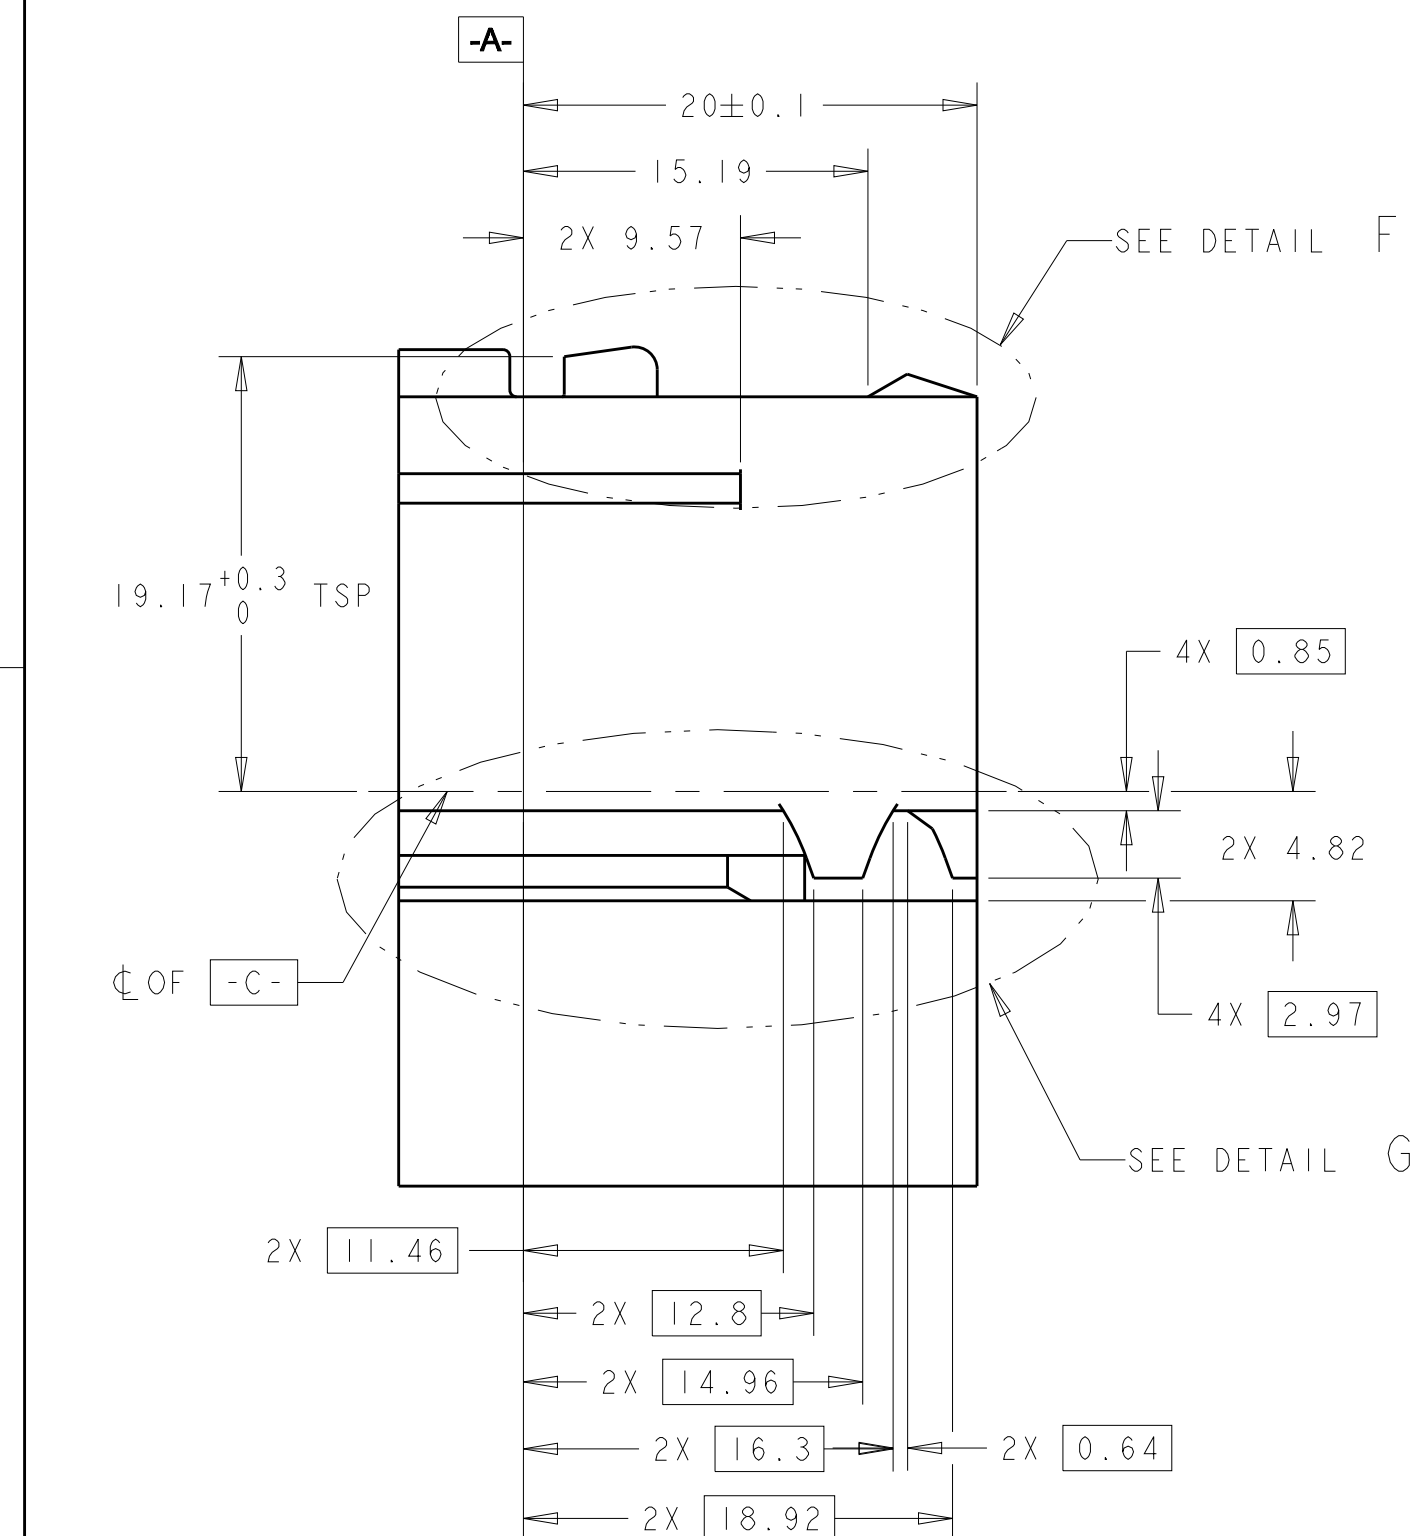

SECTION B-B

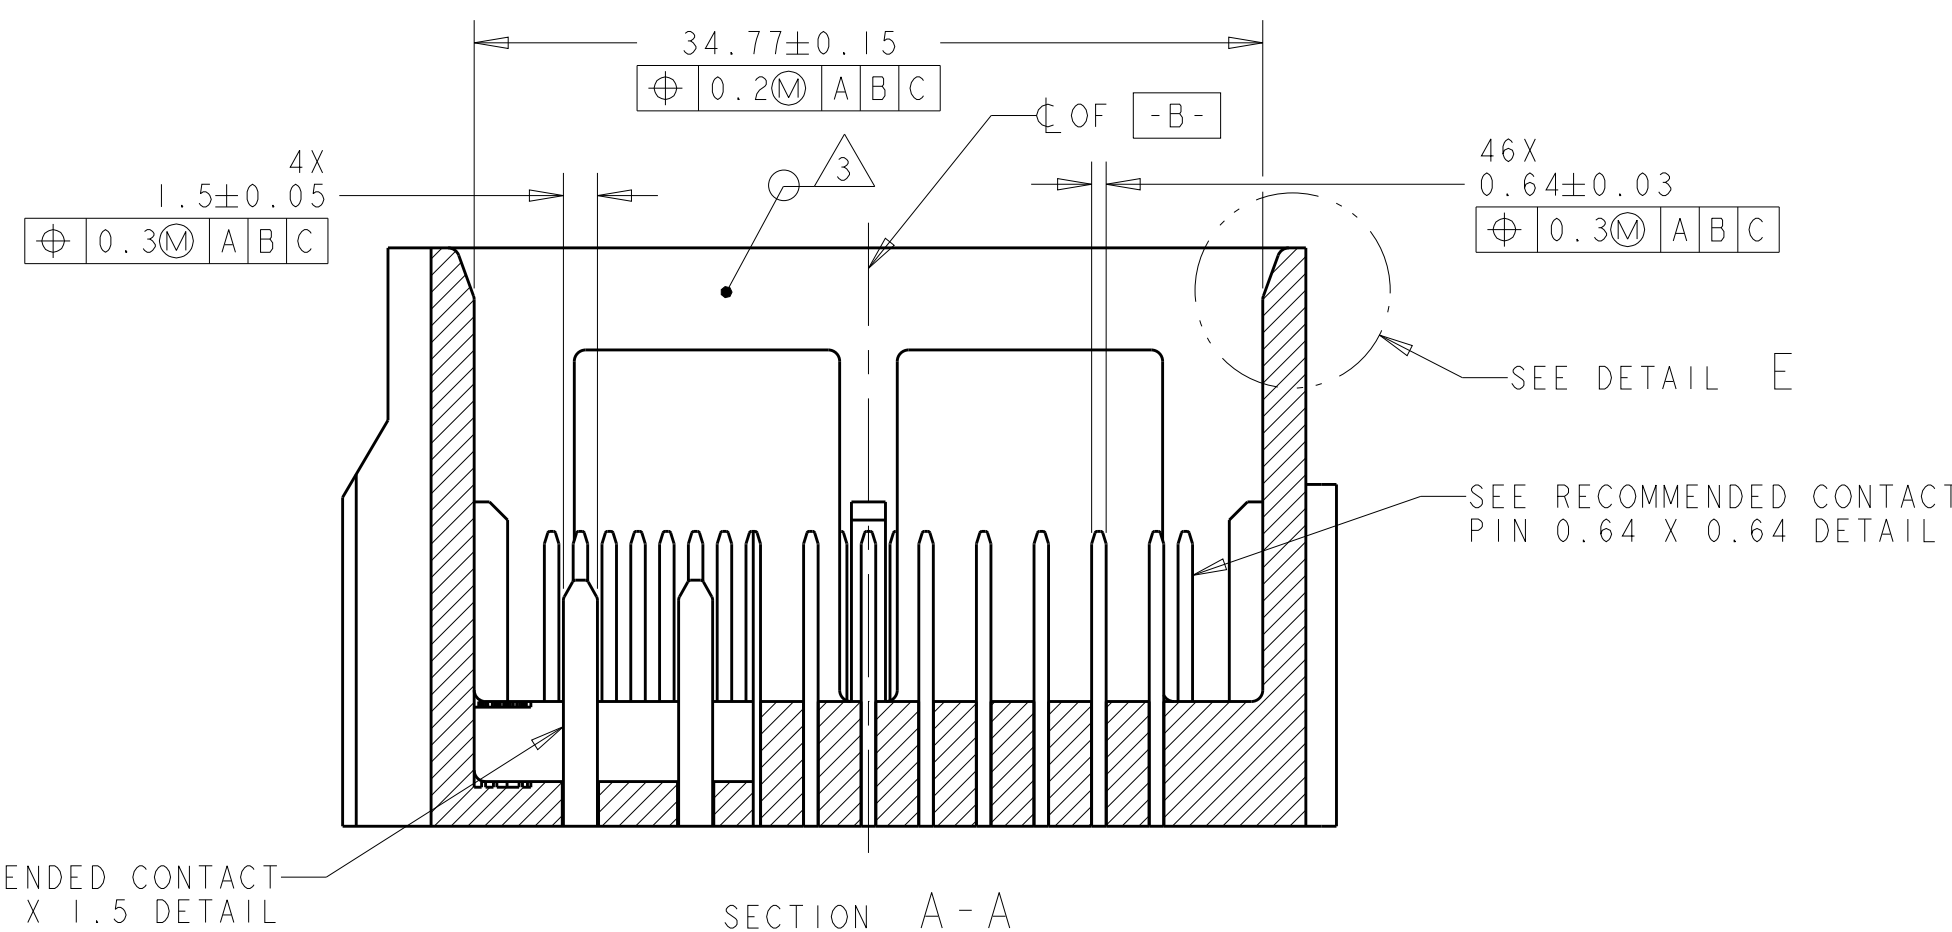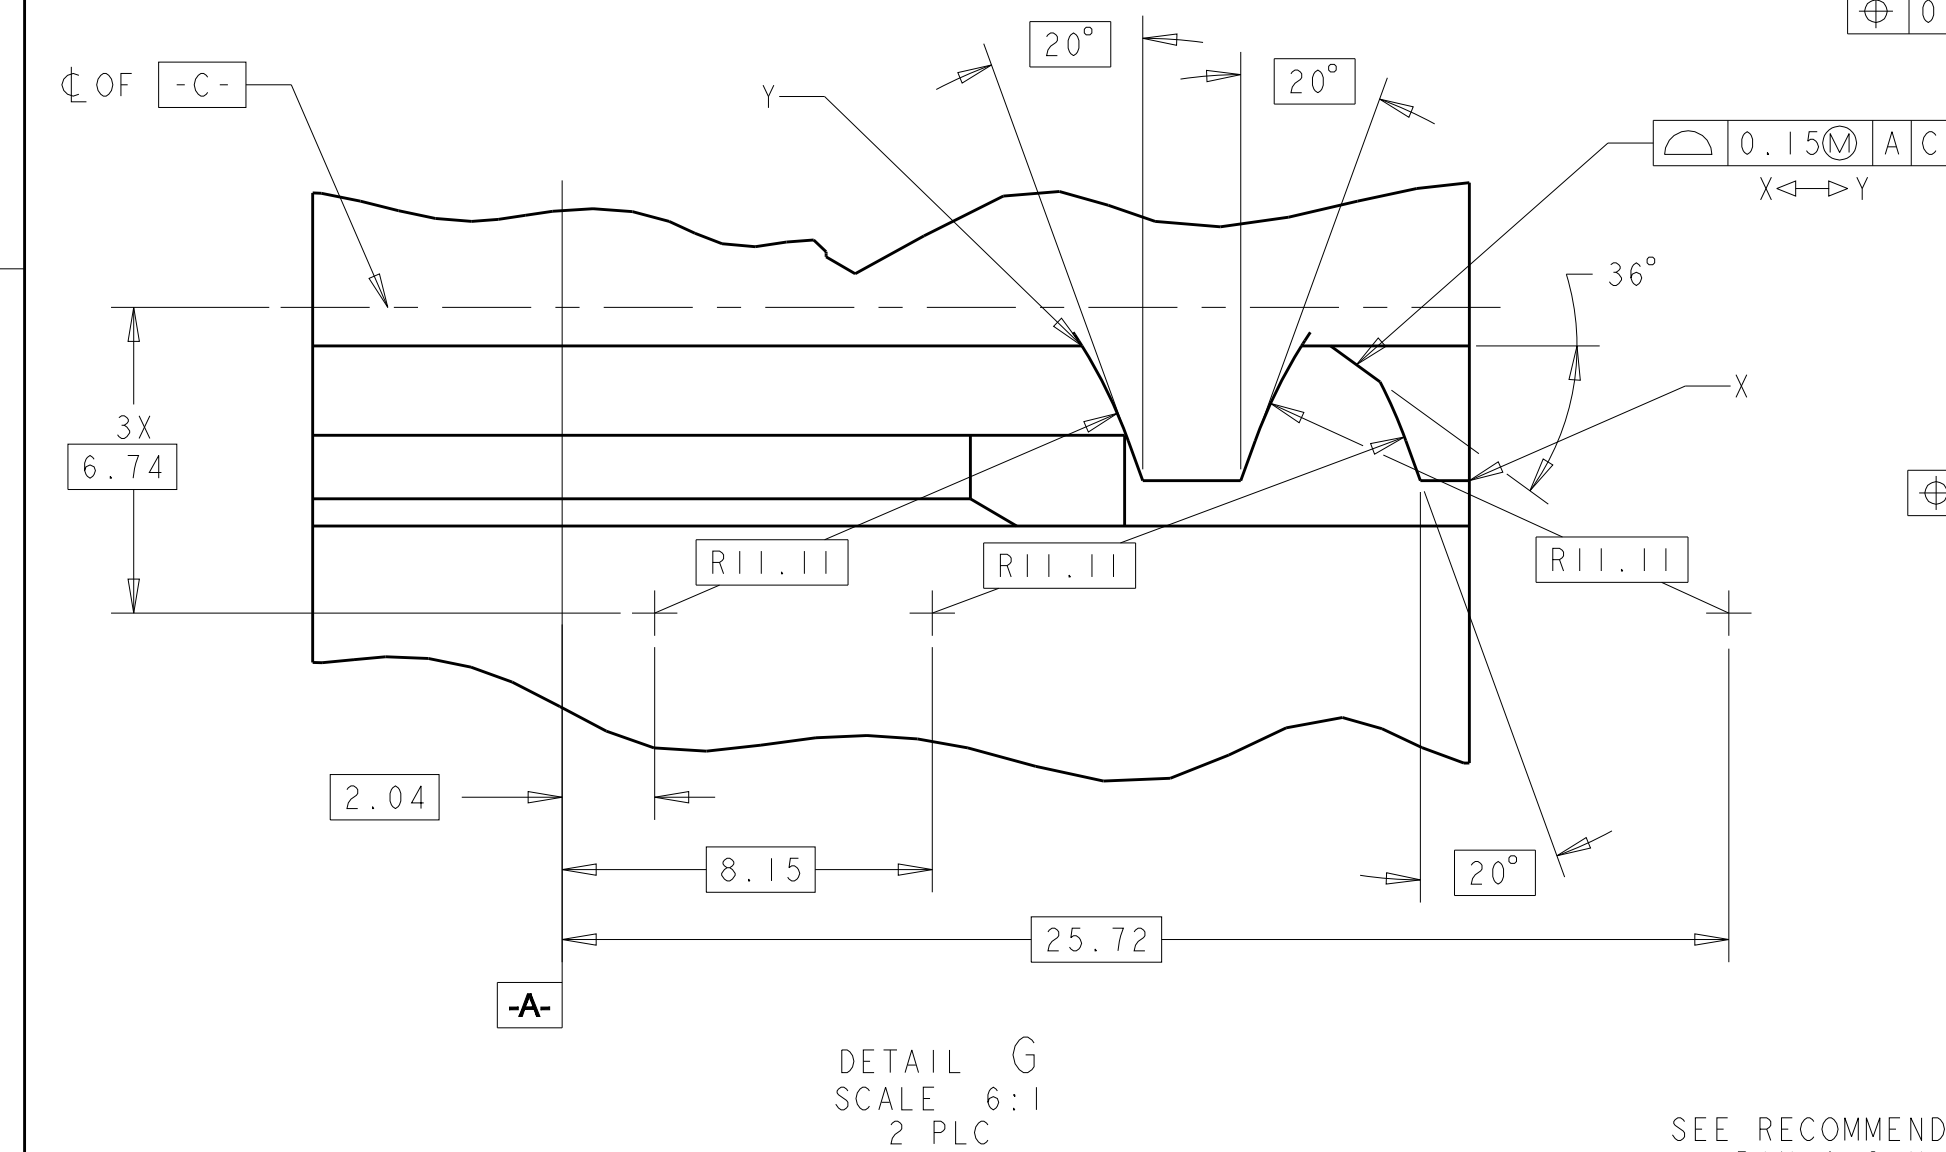

SECTION A-A

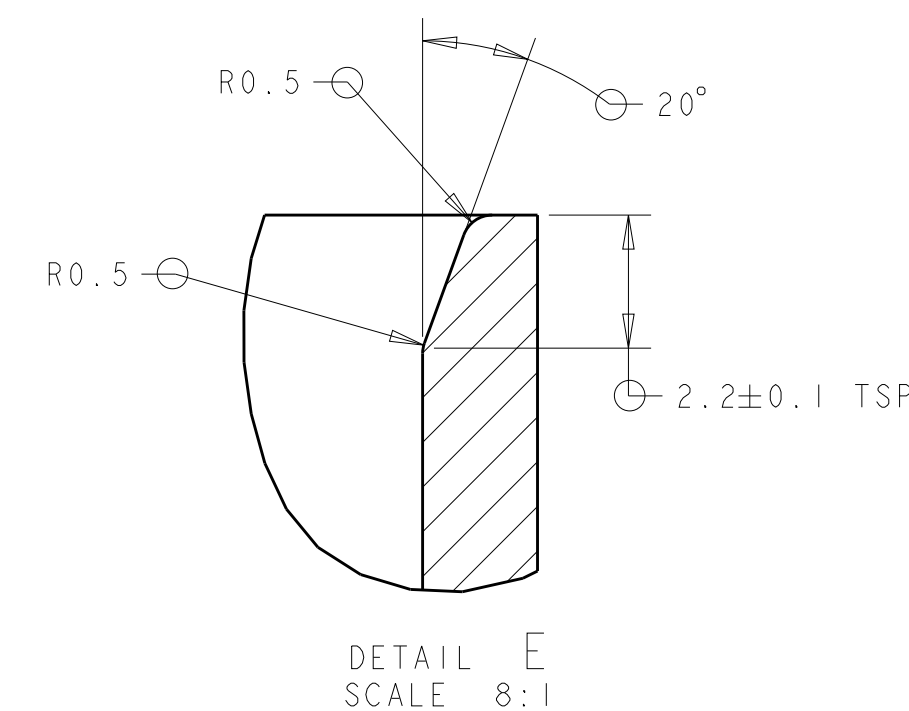

DETAIL E
SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN B. CRISAMORE 21JUL2004		NAME TE Connectivity ASSEMBLY, 50-WAY, KEY A, PCM HARNESS		RESTRICTED TO -
DIMENSIONS: mm		CHK M. HITCHCOCK 21JUL2004				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. MARTIN 21JUL2004		PRODUCT SPEC		SIZE A100779
0 PLC ±. 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES ±1°		APPLICATION SPEC		CAGE CODE C=1438691		
MATERIAL -		WEIGHT -		Customer Drawing		SCALE 2:1
				SHEET 2 OF 4		REV A16

8		7		6		5		4		3		2		1	
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION				20							
© COPYRIGHT 20				BY -				ALL RIGHTS RESERVED.							
												</			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1438691-3](#)