

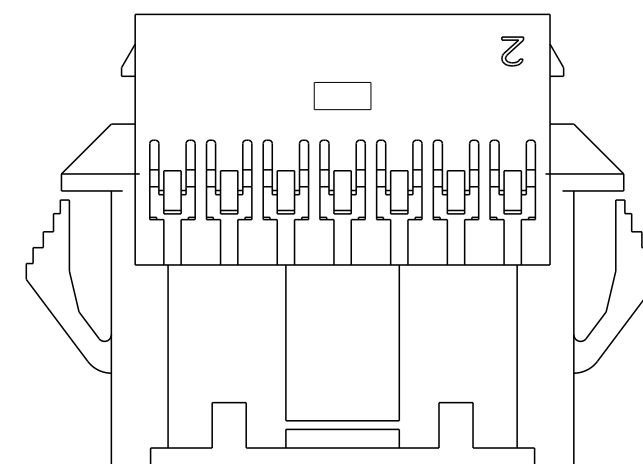
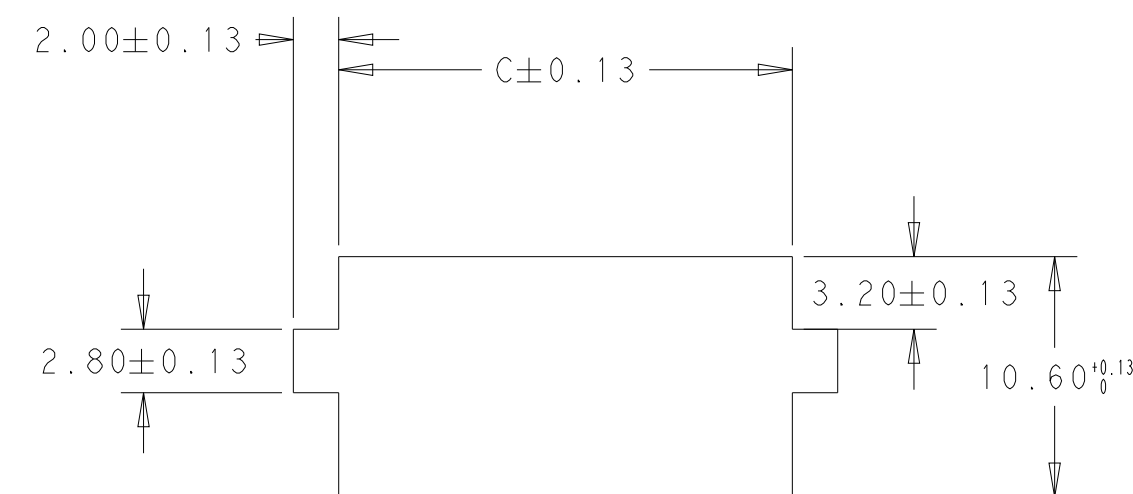
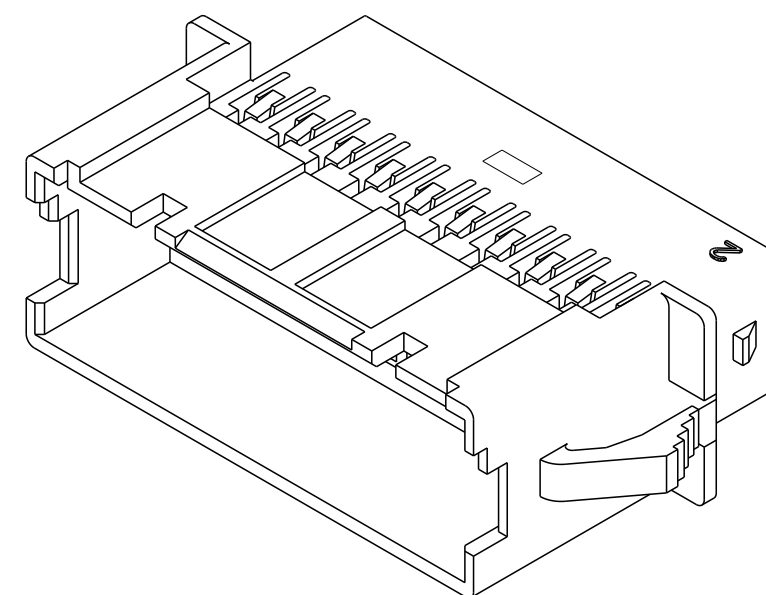


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		B	REVISED PER ECR-15-006219	30APR2015	NK	JR

1. MATERIAL: NYLON UL94V-0, FLAME RETARDANT,
COLOR: NATURAL
2. PARTS TESTED TO IEC 60695-2-11 AND
IS COMPLIANT TO IEC 60335-1.
3. HOUSING, MATERIAL MEETS MINIMUM
GLOW WIRE FLAMMIBILITY INDEX OF 850°C
PER IEC 60695-2-12 AND MINIMUM GLOW WIRE
IGNITION TEMP OF 775°C PER IEC 60695-2-13.
4. ACCEPTS TE PIN CONTACTS
P/N'S 2238007-()
5. HOUSING ACCEPTS OPTIONAL TPA
P/N'S 1969541-()
6. MATES WITH TE PLUG HOUSINGS
P/N'S 1969567-()

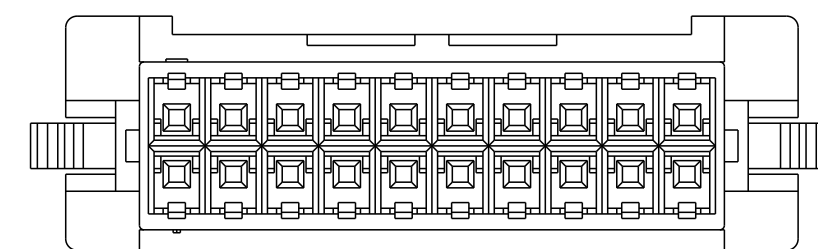

1-1969595-2, 1-1969595-4 & 1-1969595-6
SINGLE LATCH W/ CUTOUTS

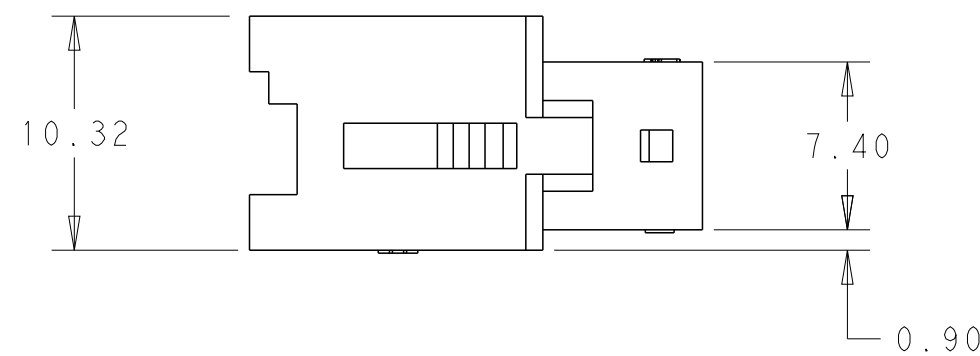

RECOMMENDED PANEL CUTOUT DIMENSIONS

40	54.50	52.89	50.79	4-1969595-0
38	52.00	50.39	48.29	3-1969595-8
36	49.50	47.89	45.79	3-1969595-6
34	47.00	45.39	43.29	3-1969595-4
32	44.50	42.89	40.79	3-1969595-2
30	42.00	40.39	38.29	3-1969595-0
28	39.50	37.89	35.79	2-1969595-8
26	37.00	35.39	33.29	2-1969595-6
24	34.50	32.89	30.79	2-1969595-4
22	32.00	30.39	28.29	2-1969595-2
20	29.50	27.89	25.79	2-1969595-0
18	27.00	25.39	23.29	1-1969595-8
16	24.50	22.89	20.79	1-1969595-6
14	22.00	20.39	18.29	1-1969595-4
12	19.50	17.89	15.79	1-1969595-2
10	17.00	15.39	13.29	1-1969595-0
8	14.50	12.89	10.79	1969595-8
POS	DIM.C	DIM.B	DIM.A	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. NOEL 03OCT2012 CHK -		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ± ±		APVD -		NAME EP 2.5 DUAL ROW, RECEPTACLE HSG WIRE TO WIRE, PANEL MOUNT GLOW WIRE	
		PRODUCT SPEC 108-2418		APPLICATION SPEC 114-13315		SIZE A2	
MATERIAL		WEIGHT -		CAGE CODE 00779		DRAWING NO C-1969595	
SEE NOTES		SEE NOTES		RESTRICTED TO -		SHEET 1 OF 1	
Customer Drawing				SCALE 3.1		REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1969595-0](#)