
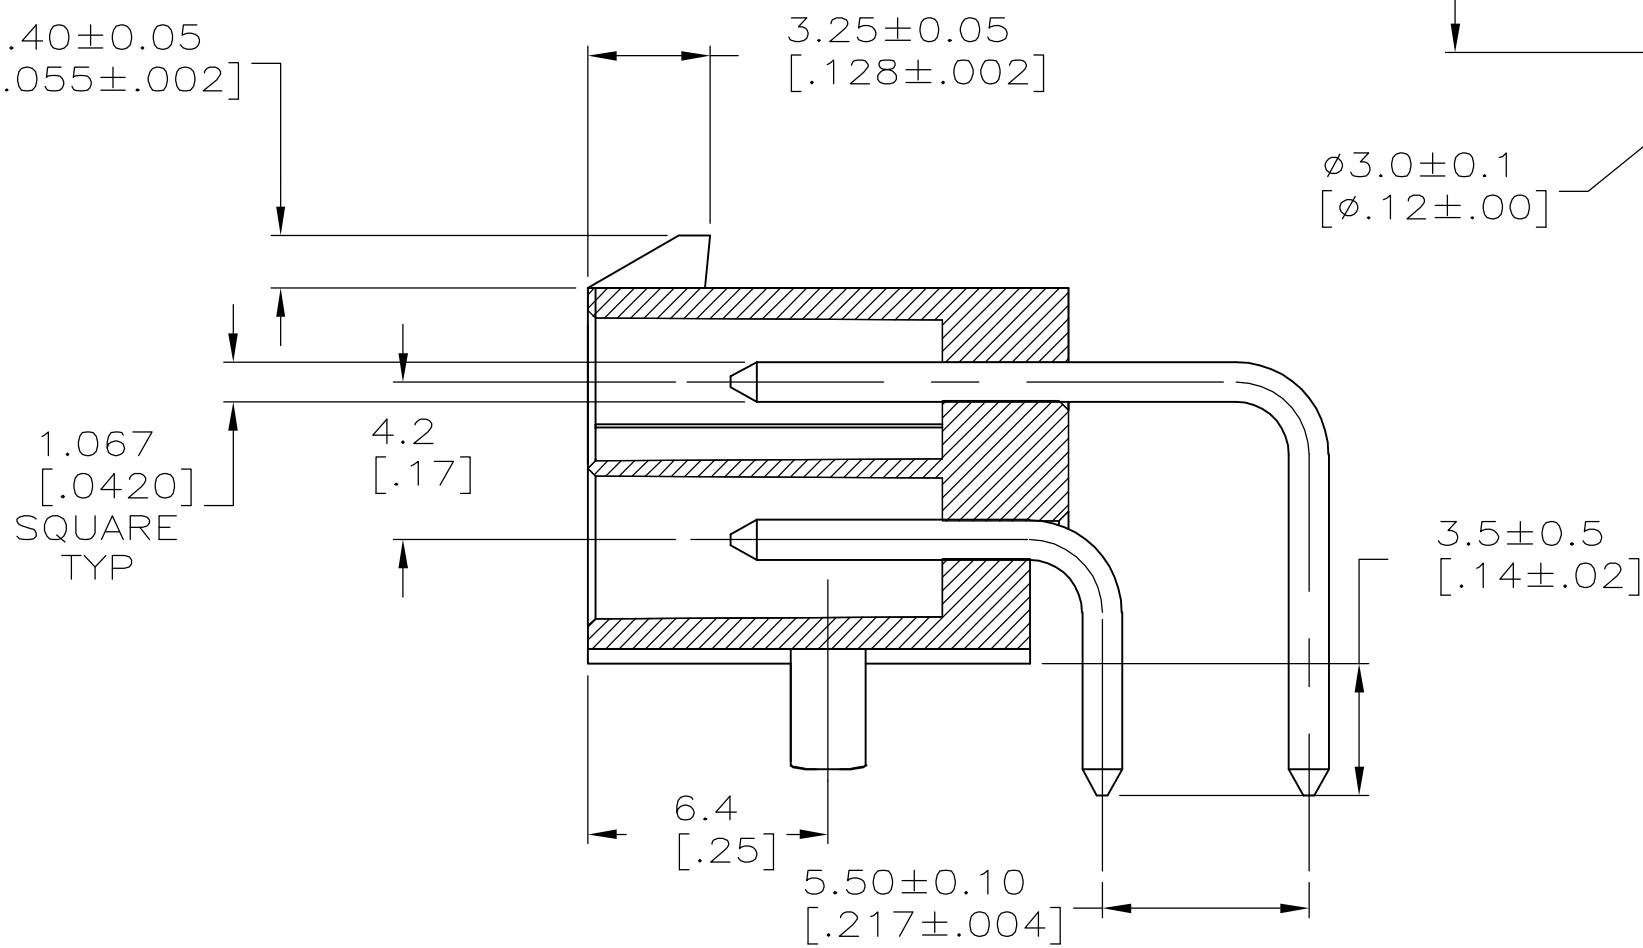
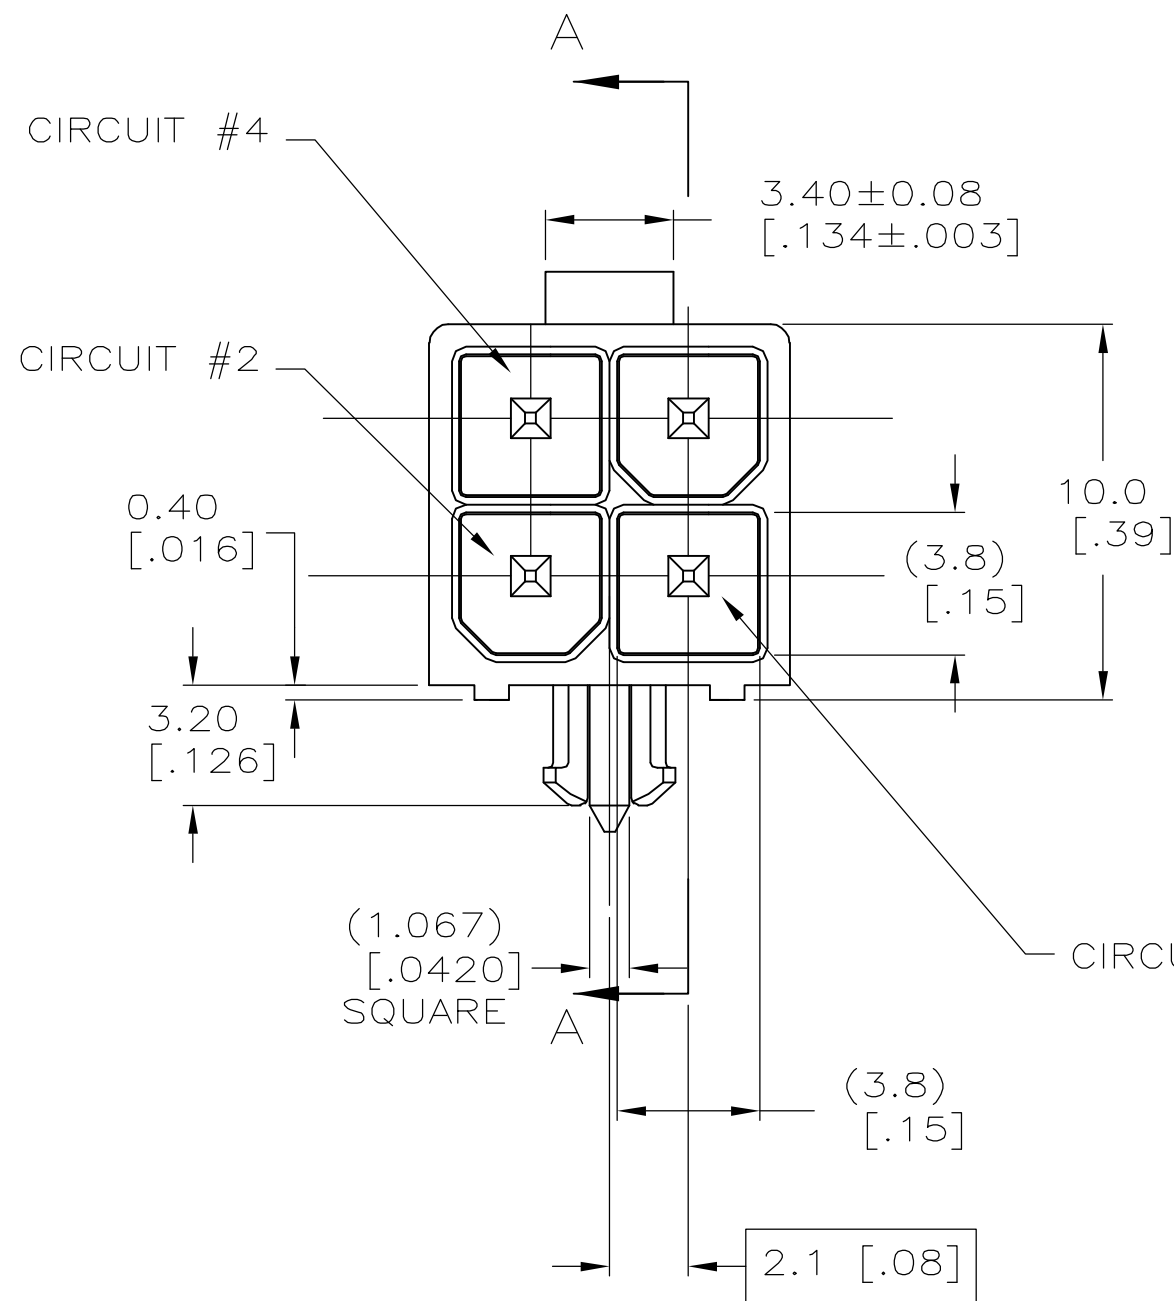
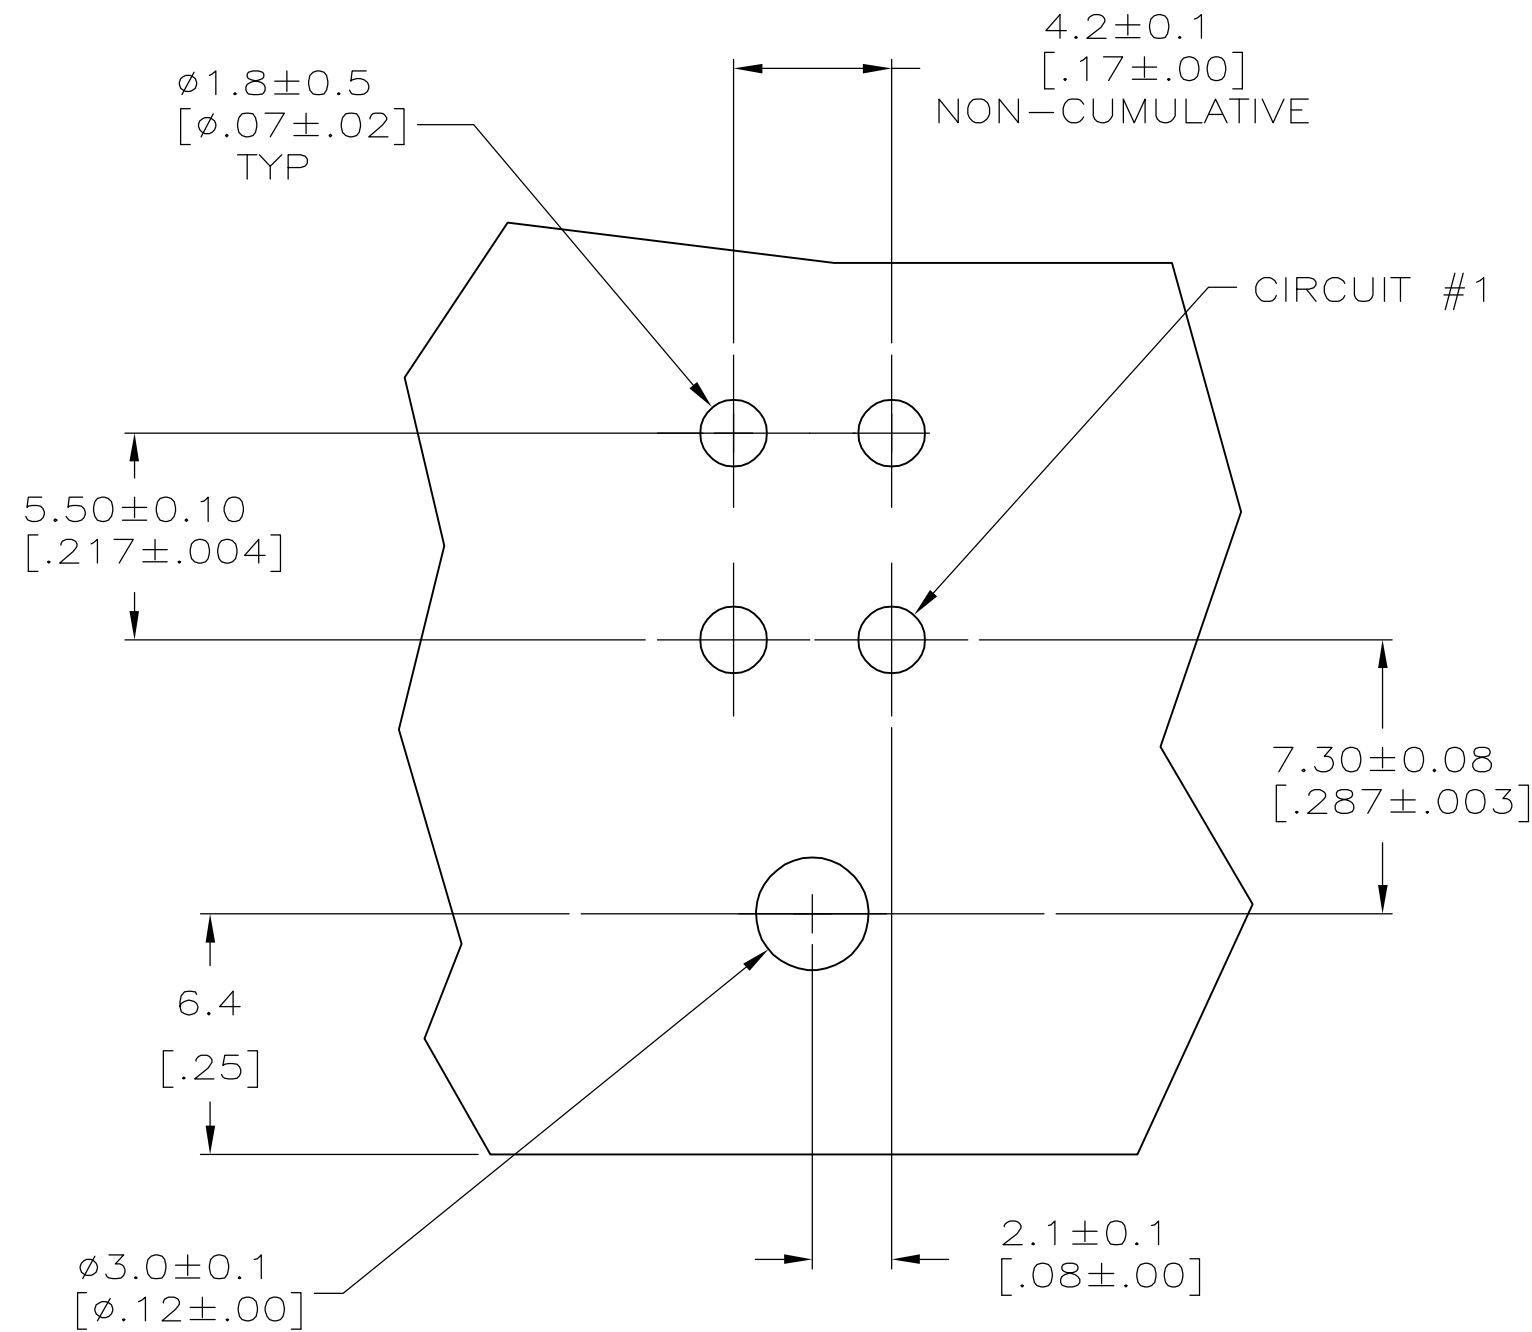


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		B	REVISED PER ECO-06-014735	10NOV06	KW	DC

- 1 MATERIAL: HOUSING — NYLON, UL94V-2 (COLOR — NATURAL).
- PIN — 1.067mm² [.0017in²] COPPER ALLOY.
2. PINS TO COMPLY WITH SOLDERABILITY SPEC 109-11-3.
- 3 0.00381 [.000150] MINIMUM TIN LEAD OVER 0.00127 [.000050] MINIMUM NICKEL, ENTIRE LENGTH OF PIN.
- 4 0.00381 [.000150] MINIMUM TIN OVER 0.00127 [.000050] MINIMUM NICKEL, ENTIRE LENGTH OF PIN.

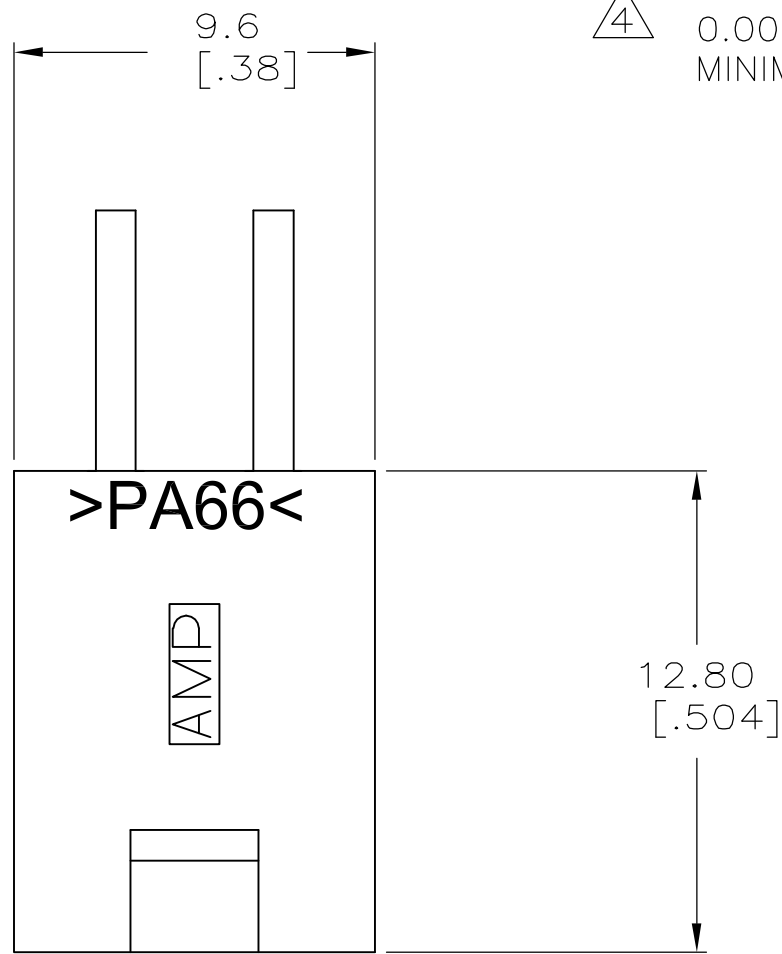

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.78 [.070] MAX THICK P.C. BOARD
COMPONENT SIDE SHOWN

SECTION A-A

SUPERSEDED BY 1-1489805-1

1	4	1	1	1-1489805-1
1	3	1	1	1489805-1
MATERIAL		FINISH	MATERIAL	COLOR
PIN		HOUSING		ASSEMBLY

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN <u>S. HOOVER</u> 02-MAR-2005		tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608							
DIMENSIONS: mm [INCHES]			CHK <u>D. COLEY</u> 02-MAR-2005									
			APVD <u>D. COLEY</u> 02-MAR-2005		NAME ASSEMBLY, HEADER, RIGHT ANGLE, 4 POSITION, W/PEGS, 94V-2, AMP-DUAC™ POWER CONNECTOR							
			PRODUCT SPEC									
MATERIAL			APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
SEE CHART			WEIGHT		A2		00779		G-1489805			
FINISH			CUSTOMER DRAWING		SCALE		SHEET		OF		REV	
SEE CHART					5:1		1		1		B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1489805-1](#)