Model P270 / P271 / P272

Electronics

Features:

- 12.7 mm (1/2") square rotary
- 1,000,000 cycle life
- Conductive plastic element
- · Heavy duty applications
- Sealed unit available





Model Styles Available

Panel, Solder Lugs, Single Gang	P270
Panel, Solder Lugs, with Center Tap	P271
Panel, Solder Lugs, Dual Gang	P272

Electrical

esistance Range, Ohms 200-1M (for "B' 1K-1M (for other				
Standard Resistance Tolerance				
Residual Resistance	6 Ώ max.			
Input Voltage, maximum	500 Vdc not to exceed power rating			
Power rating, Watts	2 Watts @ 70°C for "B" Taper, 1 Watt for all others			
Dielectric Strength	1000VAC, I minute			
Insulation Resistance, Minimum	50M ohms at 500Vdc			
Sliding Noise	100mV max.			
Actual Electrical Travel, Nominal	300°			
Electrical Continuity, Nominal	312°			

Mechanical

Total Mechanical Travel		312°± 5°
Static Stop Strength, Maximum		200 oz-in
Rotational Torque, (Single gang)	Dust Proof: 1.0.oz-in. Max.	Sealed: 1.0 to 2.5 oz-in
Rotational Torque, Maximum (Dual gang)	Dust Proof : 3.0.o.	z-in. Sealed: 5.0 oz-in
Panel Nut Tightening Torque		25 lb-in

Issue A 11/2016 Page 1

Model P270 / P271 / P272




Environmental

Operating Temperature Range


-55°C to +120°C

Rotational Load Life 1M Cycles (10% ΔR)

Ordering

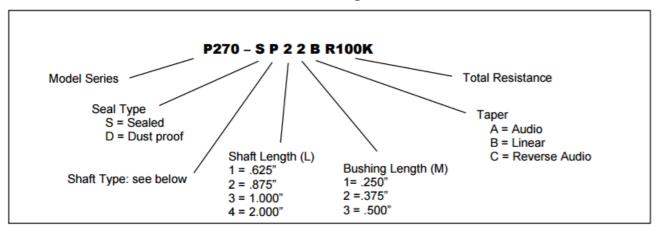

Shaft Types

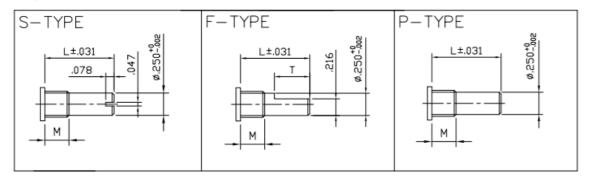

F-TYPE Shaft – Bushing Combinations					
Shaft Length (L)	Bushing Length (M)	Flat Length (T)			
(1) = .625	(1) = .250	.315			
(1) = .625	(2) = .375	.180			
(1) = .625	(3) = .500	Not Available			
(2) = .875	(3) = .500	.315			
All Other	Combinations	.375			

STANDARD RESISTANCE VALUES, OHMS

	1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG
--	----	----	----	-----	-----	-----	------	------	------	------

Issue A 11/2016 Page 2

Model P270 / P271 / P272





CIRCUIT DIAGRAM

P270 (without Center Tap)


P271 (with Voltage Center Tap)

P272 (Dual Gang)






Model 270

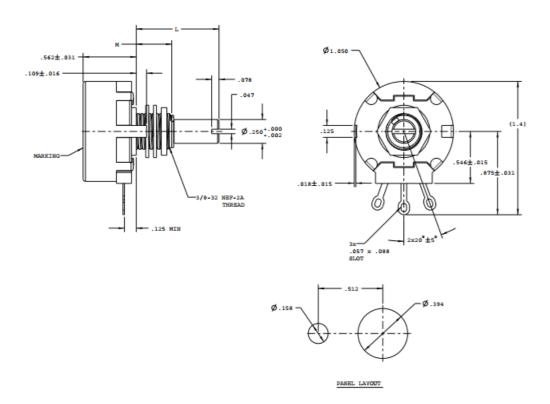


Model P270 / P271 / P272




Model 271 (Center Tap)

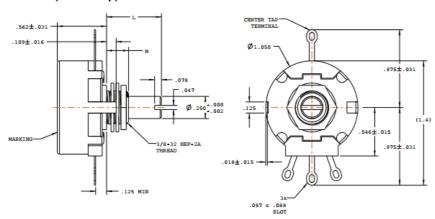



PANEL LAYOUT

Model 272 (Dual gang)

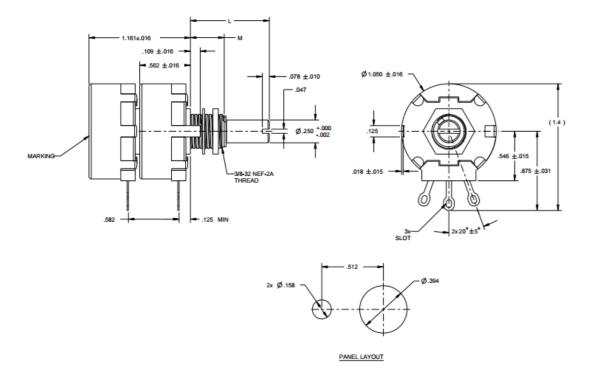


Model P270 / P271 / P272




Outline Drawings

P260D/P261D - WITH DETENT MODULE

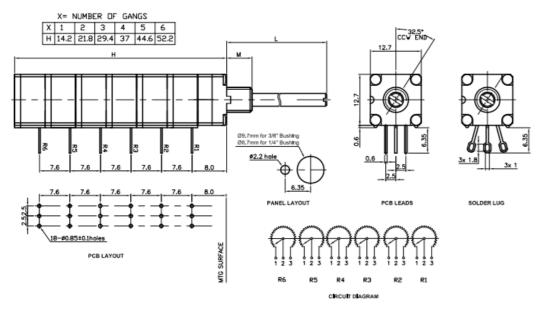

P260T - TOP ADJUST, POTENTIOMETER MODULE

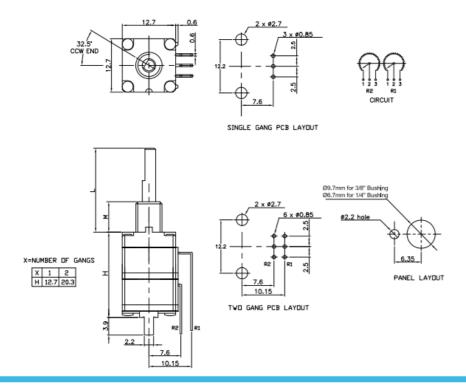

Model P270 / P271 / P272




Outline Drawings


P260L - WITH WIRE LEADS

Consult factory for details and options

P260R - WITH RIBBON TYPE CABLE

Consult factory for details and options





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

P270-SS33R5K P270-DP42R250K P270-DS22R1K P270-DP22R20K P270-DS22R2.5K P270-DS21R10K P271-SS21R10K P270-DS22R500 P270-DS22R25K P270-SP12R5K P271-SS22R10K P270-SF22R5K P270-DP42R250 P270-DP22R2K P270-SP22R10K P271-SP22R10K P270-DS22R2K5 P271-SF32R10K P270-DP22R200K P270-DS22R200K P270-DS22BR200 P110KV1-1F25BR1K P270-DS21R5K P270-SF21R10K P271-DS21R10K P271-DS21R10K P271-DS21R10K P271-DS21R10K P270-DS22R20K P270-SS22R1K P271-DP41R10K P270-DS22R2K5 P271-SP42BR2K P271-DS32R5K P272-SP22BR5K P270-DS22R5K P270-DS22R5K P270-SF11R150K P270-SP12R2K5 P270-SP42R20K P271-DS11R5K P271-DS13R10K P271-DS13R20K P271-DS32R1MEG P271-SP22R1K P272-DS13R20K P270-DS43R5K P270-SS22R5K P270-SS22R2K5 P271-DS22R2K5 P271-DS11R20K P270-DS11R10K P270-DS12R5K P270-DS22R5K P270-DS22R2K5 P270-DS22R2K5 P270-DS22R5K P270-DS22R5K P270-DS22R2K6 P270-DS22R2K6 P270-DS11R20K P270-DS11R10K P270-DS12R5K P270-DS22R5K P270-DS22R3K P270-DS22R3K P270-DS22R3K P270-DS22R3K P270-DS22R3K P270-DS12R3K P270-DS22R3K P270-DS21BR10K P270-DS22R3K P270-DS21BR10K P270-DS21BR10K P270-DS21BR10K P270-DS21BR10K P270-DS21BR10K P270-DS11BR250K P270-SS22BR500