



BNC FEMALE - N FEMALE ADAPTER


R192.418.000

Série : -

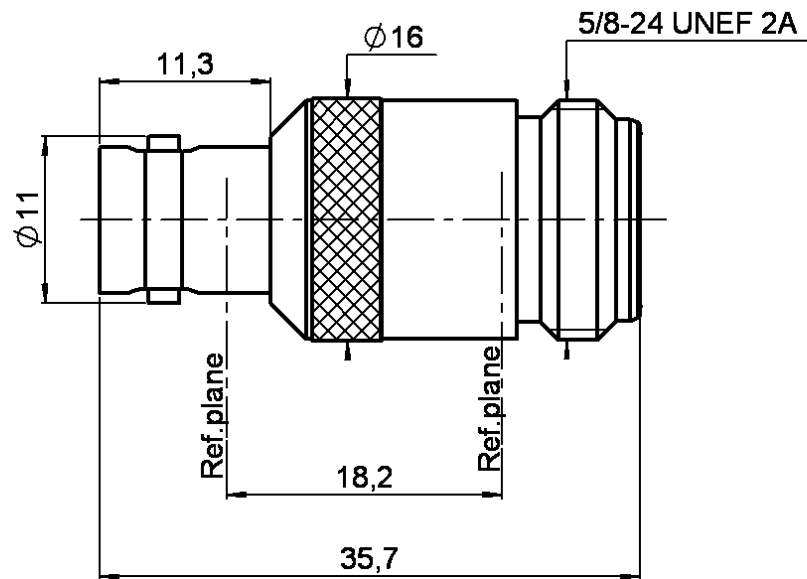

Scale : 1/1

All dimensions are in mm.

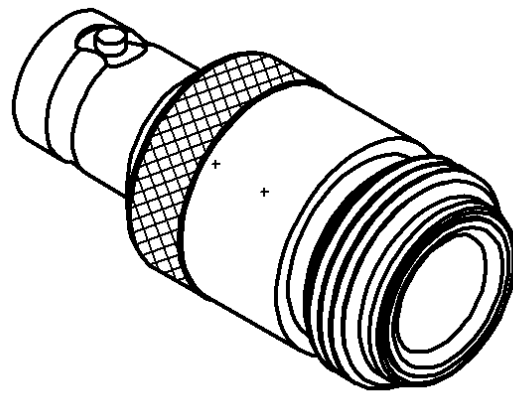

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	BRASS	NICKEL 2
INSULATOR	PTFE	
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0204 C

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.


RADIALL®

BNC FEMALE - N FEMALE ADAPTER**R192.418.000**

Série : -

PACKAGING

Standard	Unit	Other
	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	75 Ω
Frequency	0-1 GHz
VSWR	- + 0.000 x F(GHz) Maxi
Insertion loss	- $\sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL

Operating	-55/+155 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini

Recommended torque

Mating	BNC	0 N.cm
	N	0 N.cm
	-	0 N.cm
Panel nut	NA	NA N.cm

Mating life	500 Cycles mini
Weight	0.000 g

OTHERS CHARACTERISTICS

Issue : 0204 C

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

**RADIALL**

®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R192418000