
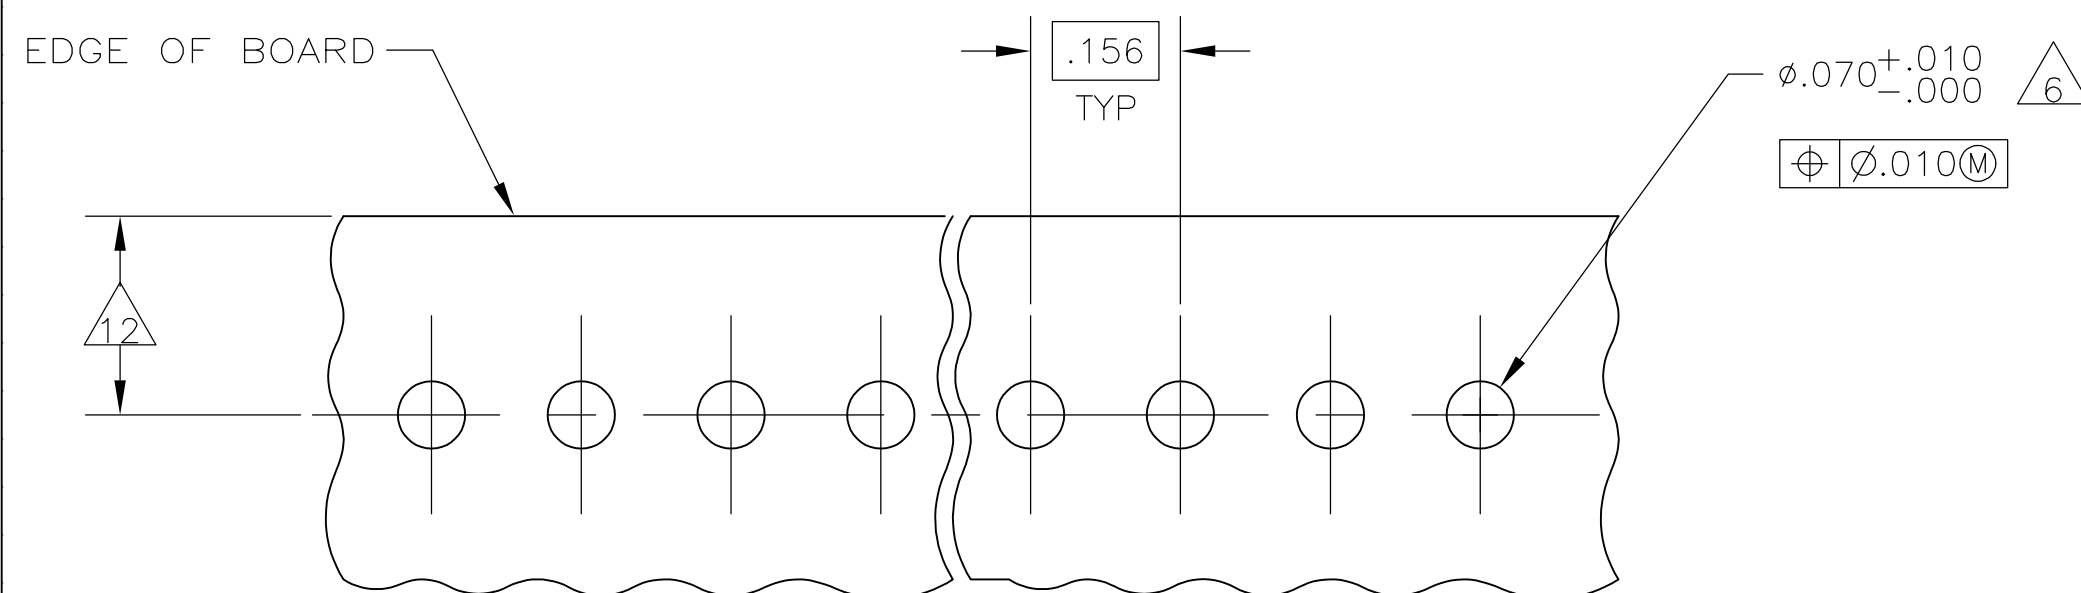
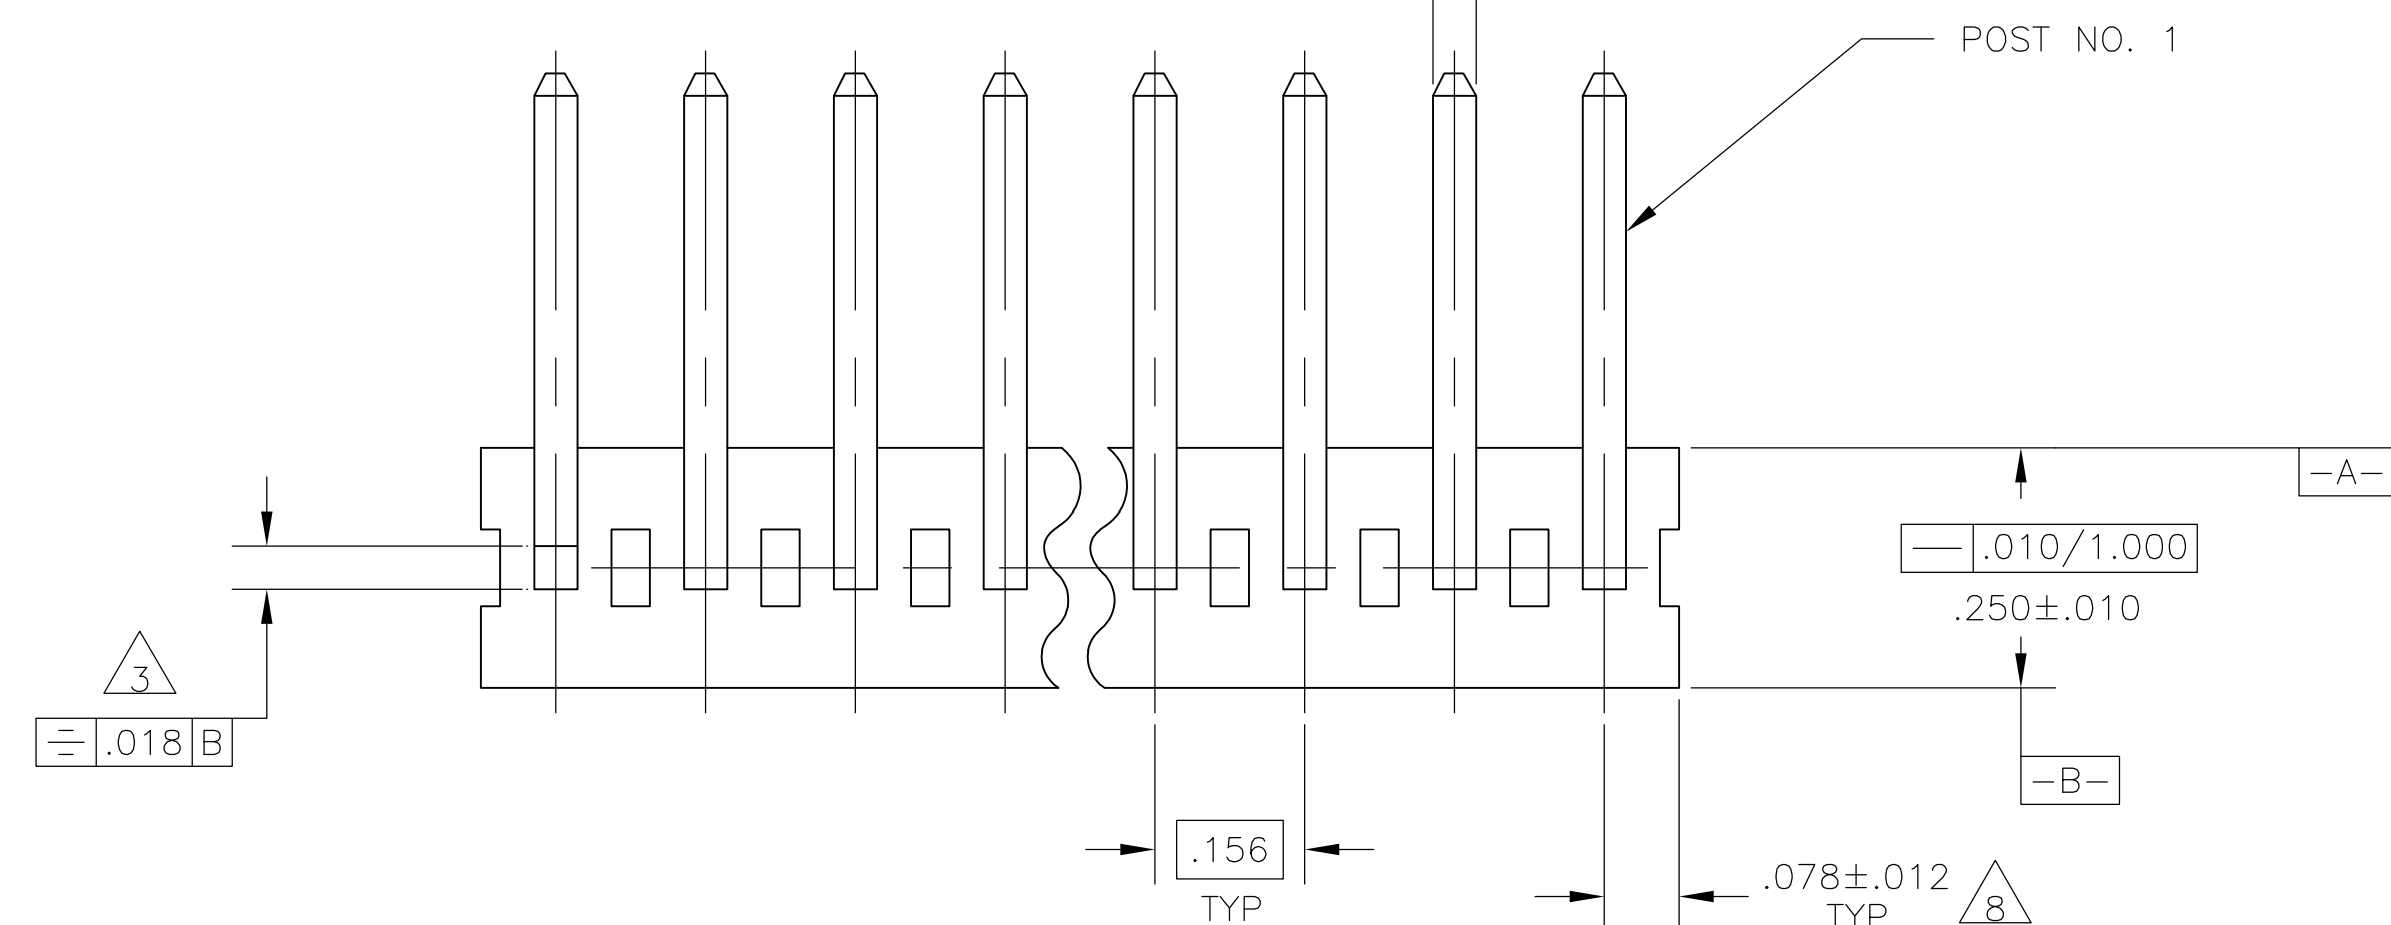
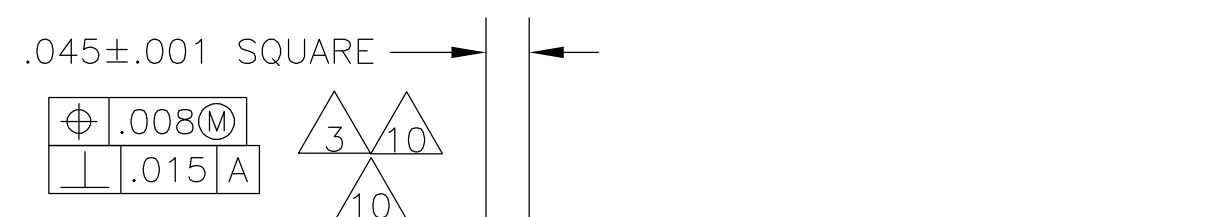



LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			Z1	REVISED PER ECR-15-006687	21OCT2015	NK	NL

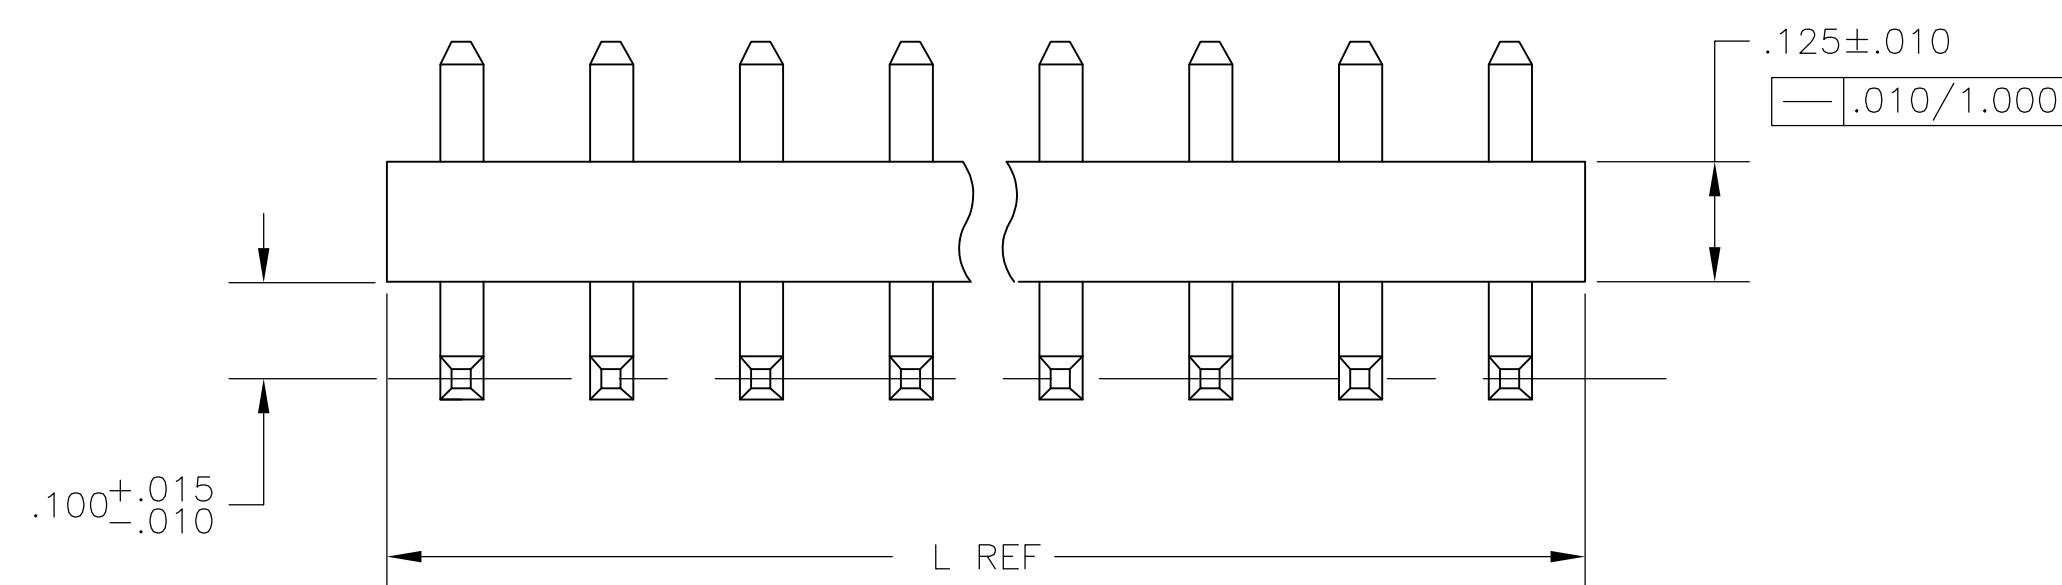

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THICK P.C. BOARD


.063	1.60	—	—
.060	1.52	—	—
.045	1.14	1.000	25.40
.030	0.76	.475	12.07
.018	0.46	.430	10.92
.015	0.38	.415	10.54
.012	0.30	.390	9.91
.010	0.25	.250	6.35
.008	0.20	.156	3.96
.005	0.13	.140	3.56
.001	0.03	.125	3.18
.000350	0.00889	.100	2.54
.000150	0.00381	.078	1.98
.000050	0.00127	.070	1.78
.000015	0.00038	.065	1.65
IN	MM	IN	MM

CONVERSION TABLE

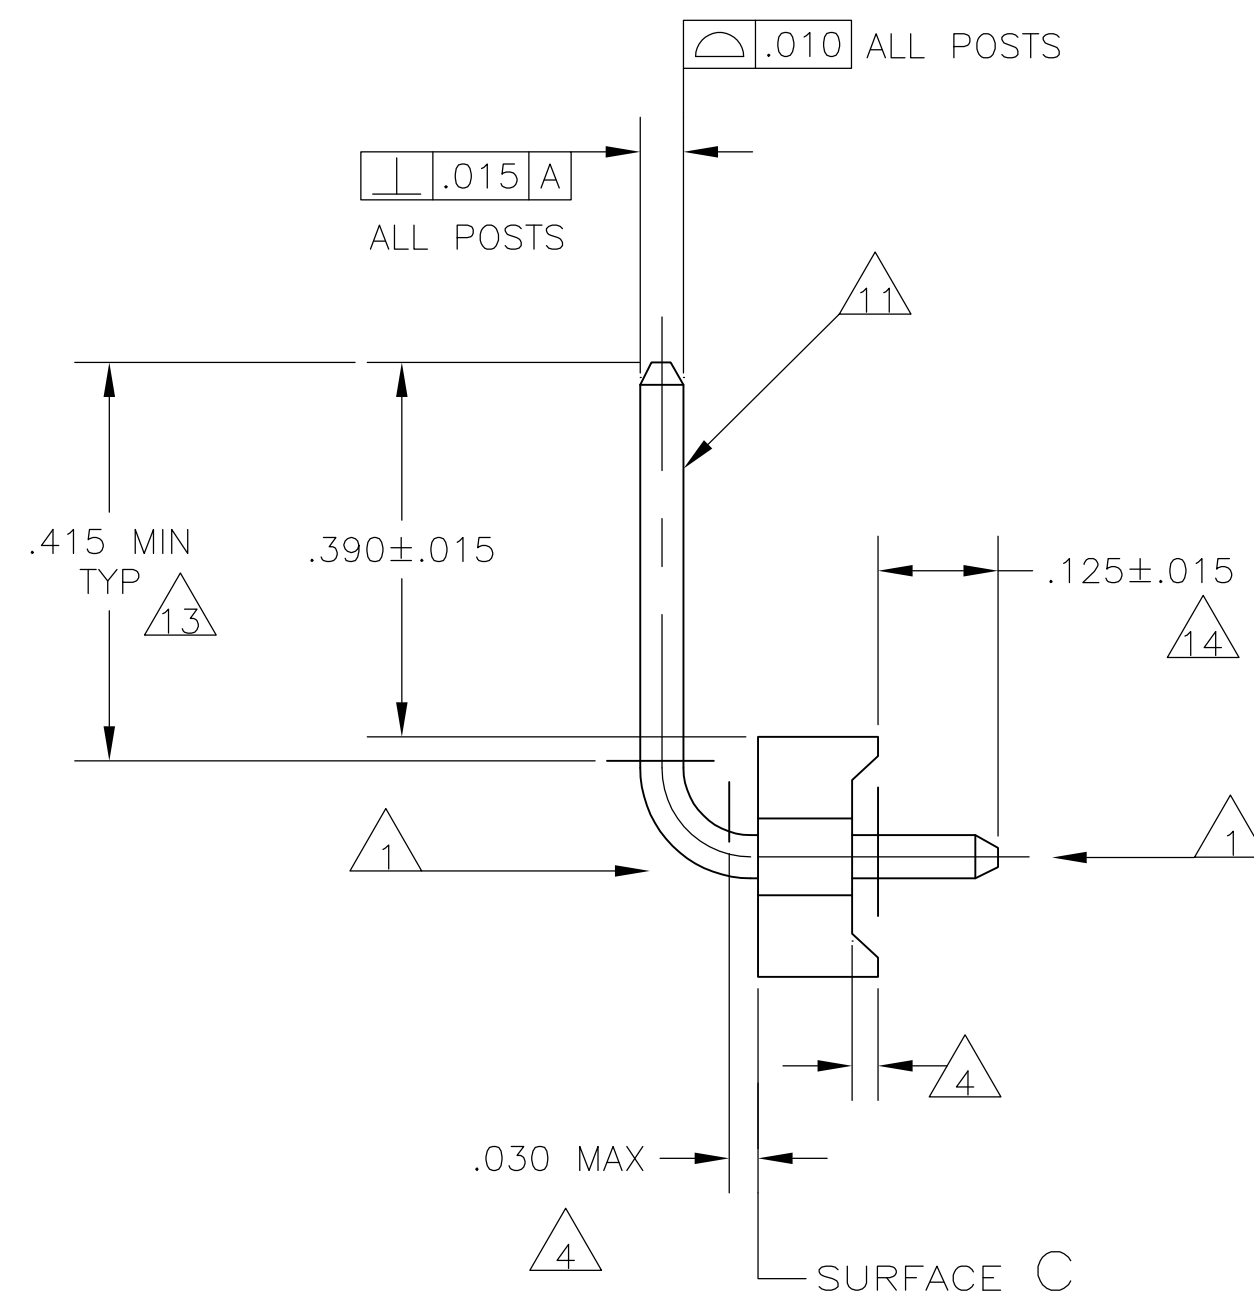

TIN	3.744	95.10	24	5-641204-4
TIN	3.588	91.14	23	5-641204-3
TIN	3.432	87.17	22	5-641204-2
TIN	3.276	83.21	21	5-641204-1
TIN	3.120	79.25	20	5-641204-0
TIN	2.964	75.29	19	4-641204-9
TIN	2.808	71.32	18	4-641204-8
TIN	2.652	67.36	17	4-641204-7
TIN	2.496	63.40	16	4-641204-6
TIN	2.340	59.44	15	4-641204-5
TIN	2.184	55.47	14	4-641204-4
TIN	2.028	51.51	13	4-641204-3
TIN	1.872	47.55	12	4-641204-2
TIN	1.716	43.59	11	4-641204-1
TIN	1.560	39.62	10	4-641204-0
TIN	1.404	35.66	9	3-641204-9
TIN	1.248	31.70	8	3-641204-8
TIN	1.092	27.74	7	3-641204-7
TIN	.936	23.77	6	3-641204-6
TIN	.780	19.81	5	3-641204-5
TIN	.624	15.85	4	3-641204-4
TIN	.468	11.89	3	3-641204-3
TIN	.312	7.92	2	3-641204-2
FINISH	IN	MM	NUMBER OF POSITIONS	PART NUMBER
	L			

15	SUPERCEDED BY 5-641204-4	TIN-LEAD	3,744	95.10	24	2-641204-4
15	SUPERCEDED BY 5-641204-3	TIN-LEAD	3,588	91.14	23	2-641204-3
15	SUPERCEDED BY 5-641204-2	TIN-LEAD	3,432	87.17	22	2-641204-2
15	SUPERCEDED BY 5-641204-1	TIN-LEAD	3,276	83.21	21	2-641204-1
15	SUPERCEDED BY 5-641204-0	TIN-LEAD	3,120	79.25	20	2-641204-0
15	SUPERCEDED BY 4-641204-9	TIN-LEAD	2,964	75.29	19	1-641204-9
15	SUPERCEDED BY 4-641204-8	TIN-LEAD	2,808	71.32	18	1-641204-8
15	SUPERCEDED BY 4-641204-7	TIN-LEAD	2,652	67.36	17	1-641204-7
15	SUPERCEDED BY 4-641204-6	TIN-LEAD	2,496	63.40	16	1-641204-6
	OBSELETE	TIN-LEAD	2,340	59.44	15	1-641204-5
15	SUPERCEDED BY 4-641204-4	TIN-LEAD	2,184	55.47	14	1-641204-4
15	SUPERCEDED BY 4-641204-3	TIN-LEAD	2,028	51.51	13	1-641204-3
15	SUPERCEDED BY 4-641204-2	TIN-LEAD	1,872	47.55	12	1-641204-2
15	SUPERCEDED BY 4-641204-1	TIN-LEAD	1,716	43.59	11	1-641204-1
15	SUPERCEDED BY 4-641204-0	TIN-LEAD	1,560	39.62	10	1-641204-0
15	SUPERCEDED BY 3-641204-9	TIN-LEAD	1,404	35.66	9	— 641204-9
	OBSELETE	TIN-LEAD	1,248	31.70	8	— 641204-8
15	SUPERCEDED BY 3-641204-7	TIN-LEAD	1,092	27.74	7	— 641204-7
15	SUPERCEDED BY 3-641204-6	TIN-LEAD	.936	23.77	6	— 641204-6
15	SUPERCEDED BY 3-641204-5	TIN-LEAD	.780	19.81	5	— 641204-5
15	SUPERCEDED BY 3-641204-4	TIN-LEAD	.624	15.85	4	— 641204-4
15	SUPERCEDED BY 3-641204-3	TIN-LEAD	.468	11.89	3	— 641204-3
	SUPERCEDED BY 3-641204-2	TIN-LEAD	.312	7.92	2	— 641204-2
		FINISH	IN	MM	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 9135 N. GANNON 08DEC92 DWG R. SWING 08DEC92 11JAN93		 TE Connectivity		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: FINISH 0. PLG ± 1. PLG ± 2. PLG ± 3. PLG ±.005 4. PLG ± ANGLES ± FINISH		NAME MTA-156 HEAD ASSEMBLY, PLAIN, RIGHT ANGLE, .045 SQUARE POST, .00030 GOLD		
		PRODUCT SPEC — APPLICATION SPEC —		SIZE A1		
MATERIAL 		WEIGHT —		CAGE CODE 00779		
		CUSTOMER DRAWING		DRAWING NO 641204		
				RESTRICTED TO SCALE 5:1 SHEET 1 of 1 REV Z		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-641204-5](#)