

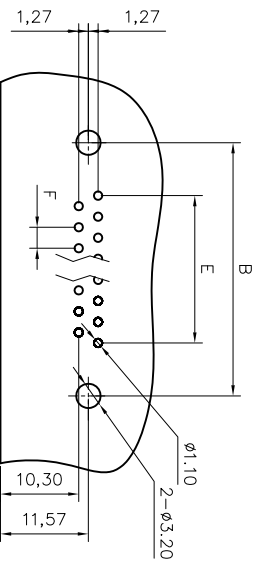
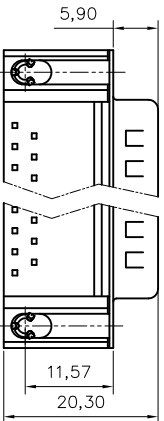


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be distributed, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.



RECOMMENDED P.C.B LAYOUT
(TOLERANCE +/-0.03)

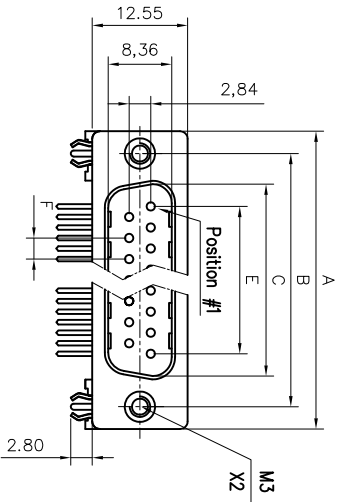

Customer drawing

Nb of contacts	Dimensions				
	A	B	C	E	F
9	30.89	24.99	16.92	10.96	2.77
15	39.10	33.32	25.25	19.18	2.77
25	53.09	47.04	38.96	33.24	2.77
37	69.40	63.50	55.42	49.86	2.77


REVISONS			
SYM	EDN	DESCRIPTION	DATE
1			11/18/10

D-SUB TECHNICAL DATA

- SHELL : Steel, 2.5um(100u") min. tin over 1.25um(50u") min. nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 Color Black
- CONTACTS : Brass
0.76um(30u") min. gold over 1.25um(50u") min nickel in mating area,
2.54um(100u") min. tin over 1.25um(50u") min. nickel on termination area
- REAR INSERT : Brass,100u" min. tin over 50u" min. nickel
BOARDLOCK : Brass,100u" min. tin over 50u" min. nickel
- ELECTRICAL : Voltage rating: 250 V RMS at 50 Hz
Current rating: 5A per contact
Withstanding Voltage >1000 V RMS at 50 Hz for one minute
Insulation resistance >5000 M Ohms
Contact resistance 20 mOhms max.
- CLIMATIC : Temperature range -55 °C up to 125°C
- MARKING : Amphenol-...(Series No.)
Manufacturing date
Commercial reference

PRODUCT CODE

L 717SD X XX P 1A CH 3R C309

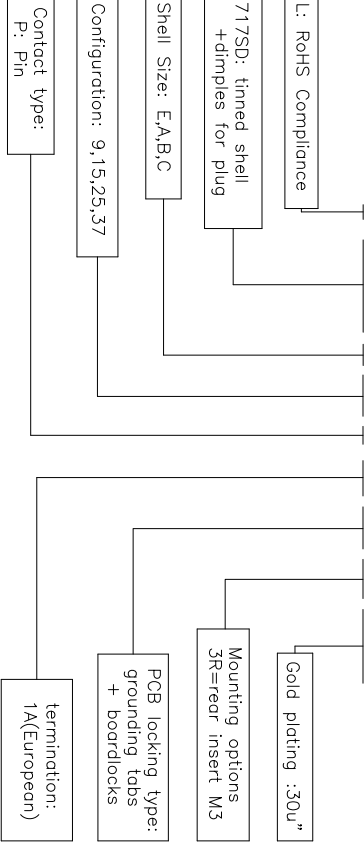

UNLESS OTHERWISE SPECIFIED			
TOLERANCES		APPROVAL	DATE
U.S.	METRIC	DESIGN	ISSUED
.XX +/-	0.50	CHKD	11/18/10
.XXX +/-	0.30	CHKD	11/18/10
ANGLES +/-	0.20		
FOR MATERIALS AND FINISHES			
REMOVE SHARP EDGES			
DIMENSIONS			
TOLERANCES			
ANGLE OF PROJECTION			
SIZE DRAWING NO.			
A4 C L717SDXXXPPACH3RC309			
SCALE NONE			
SHEET 1 OF 1			