


COIL: @ 25°C
 RESISTANCE 1030 OHMS \pm 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 11.4 VDC
 MUST RELEASE 6.9 VDC MAX, 1.1 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.
 RELEASE TIME 5 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

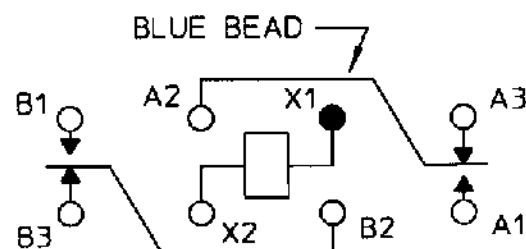

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/18/98 CK 2/18/98

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/44-031L

TYPE 'HMS' RELAY

HMS1131S04L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMS1131S04L](#)