


# XS1N30PA349DTF

inductive sensor XS1 M30 - L54.3mm - brass - Sn20mm - 12..24VDC - M12

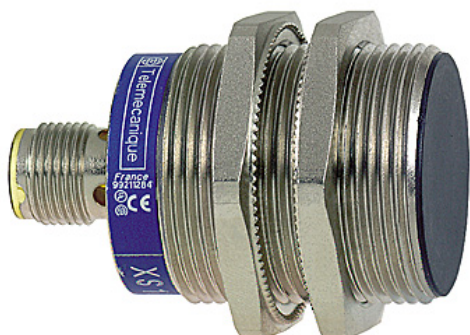

## Main

Range of product	OsiSense XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Product specific application	-
Sensor name	XS1
Sensor design	Cylindrical M30
Size	54.3 mm
Body type	Fixed
Enclosure material	Nickel plated brass
Type of output signal	Discrete
Wiring technique	3-wire
[Sn] nominal sensing distance	20 mm
Discrete output function	1 NO
Discrete output type	PNP
Electrical connection	4 pins M12 male connector
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Switching capacity in mA	≤ 200 mA DC with overload and short-circuit protection
IP degree of protection	IP67 conforming to IEC 60529 IP69 K

## Complementary

ISO thread	M30 x 1.5
Detection face	Frontal
Detector flush mounting acceptance	Flush mountable
Material	Metal
[Sd] sensing range	> 15...40 mm
Operating zone	0...16 mm
Differential travel	1...15% of Sr
Output circuit type	DC
Status LED	1 LED yellow for output state
Supply voltage limits	10...36 V DC
Switching frequency	≤ 500 Hz
Voltage drop	≤ 2 V at closed state
Current consumption	0...10 mA at no-load
Delay first up	≤ 5 ms
Delay response	≤ 0.6 ms
Delay recovery	≤ 1.4 ms
Marking	CE
Threaded length	32 mm

## Environment

Product certifications	CSA UL
Ambient air temperature for operation	-40...50 °C
Vibration resistance	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XS1N30PA349DTF](#)