



REV.	DATE	DESCRIPTION
A	08/07/98	ADD MOUNTING HOLE DIA.
B	08/17/98	CHANGE KNURL DIMENSION AND ADD TOLERANCE
		ADD TOLERANCE TO MOUNTING HOLE

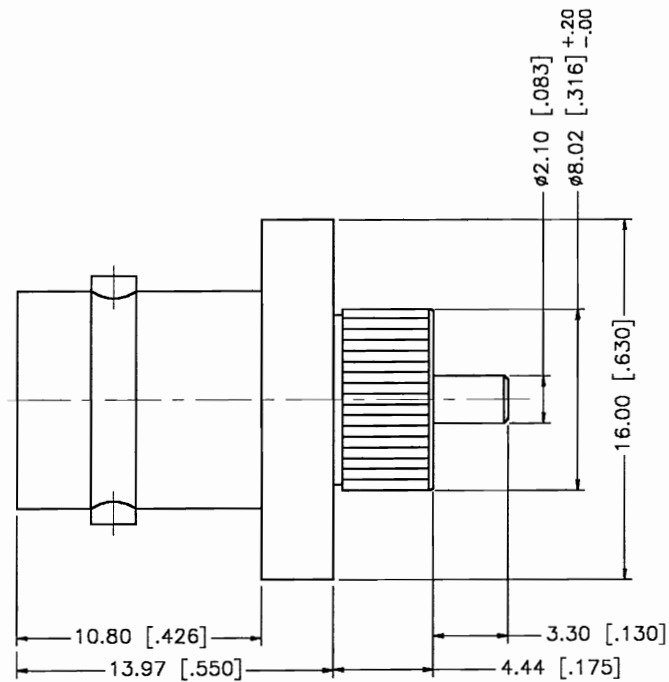

ø7.93 [ø.312]±.025
DIA. OVER
KNURL



RECOMMENDED
MOUNTING HOLE

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connex Connector Corporation			
1 BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN G.R.S.	08/17/98				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE BNC PRESS FIT RECEPTACLE JACK			
3 CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED		SIZE	FSCM NO.	DWG. NO.	REV.
4 LOCK RING	BRASS	NICKEL				A	99001	112579.DWG	B
5									
6									
7									
8			DO NOT SCALE DRAWING			SCALE	NA	PART NO. 112579	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112579](#)