


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN   APVD
CM	00		K2	REVISED PER ECR-17-018493	04JAN2018	BDA   SG

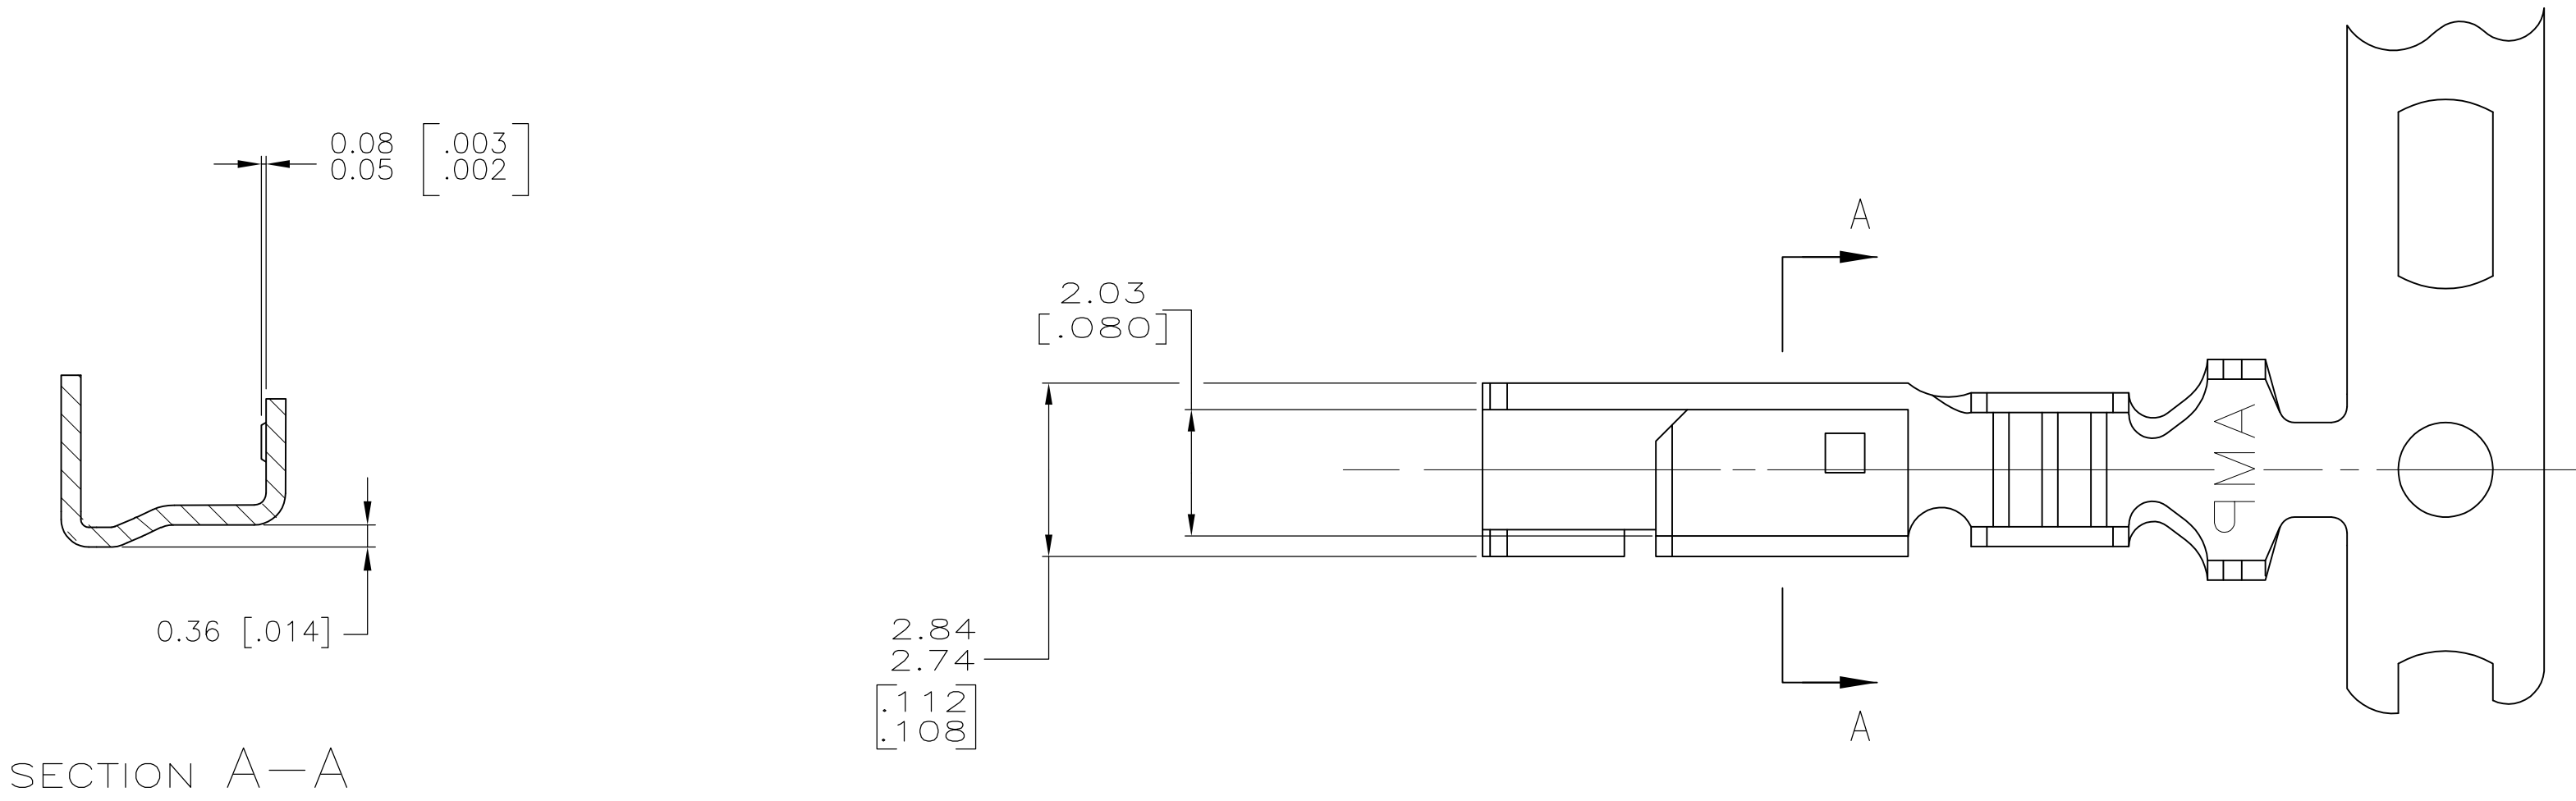

1. INSULATION RANGE: 1.09-2.79 [.043-.110]  
WIRE RANGE: 0.2-0.9 mm<sup>2</sup> (24-18) AWG.


2. 0.00203 [.000080] MIN BRIGHT MATTE TIN-LEAD OVER  
0.00127 [.000050] MIN NICKEL.

3. 0.00076 [.000030] MIN THICK GOLD STRIPES IN  
LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER  
0.00127 [.000050] MIN THICK NICKEL OVER ENTIRE  
CONTACT.

4. DIMENSIONS IN BRACKETS ARE IN INCHES.

5. 0.00203 [.000080] MIN TIN OVER  
0.00127 [.000050] MIN NICKEL.

6. OBSOLETE

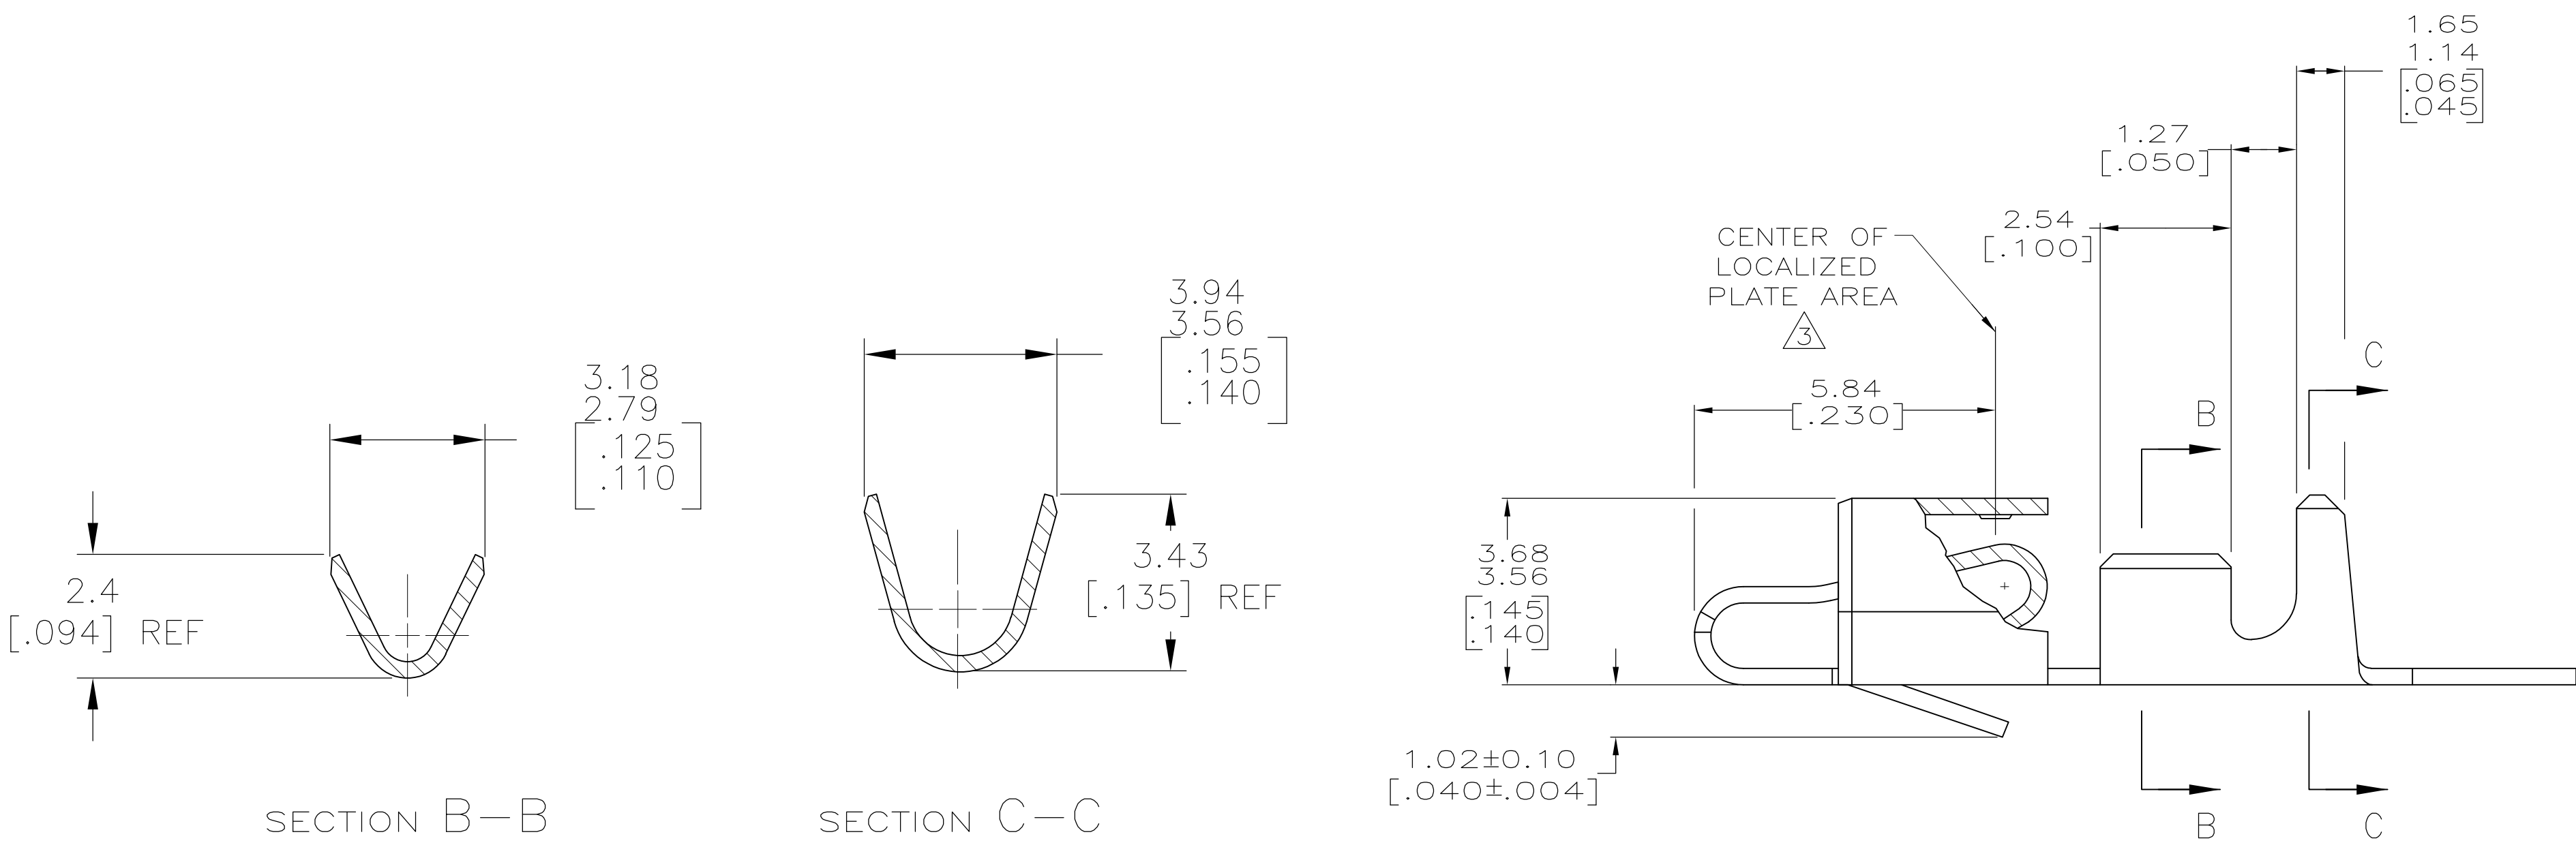

5	3-770476-1
3	770476-2
2	770476-1
FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK J. ELLIS APVD J. ELLIS PRODUCT SPEC APPLICATION SPEC MATERIAL -	18OCT2004 -	TE Connectivity	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± °30'	NAME	RECEPTACLE, SL-156	
		WEIGHT	SIZE A1	CAGE CODE 00779	DRAWING NO 770476
CUSTOMER DRAWING			SCALE 10:1	SHEET 1	OF 1
			REV K2		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[770476-1 \(Cut Strip\)](#) [770476-1 \(Mouser Reel\)](#)