

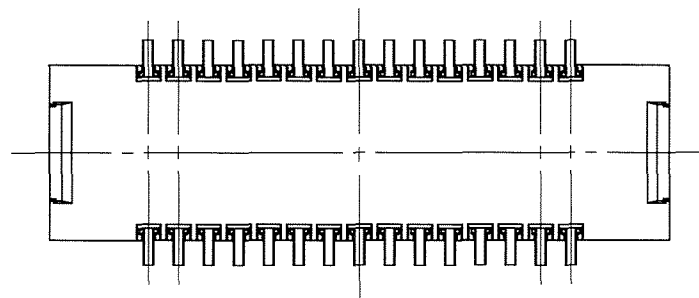
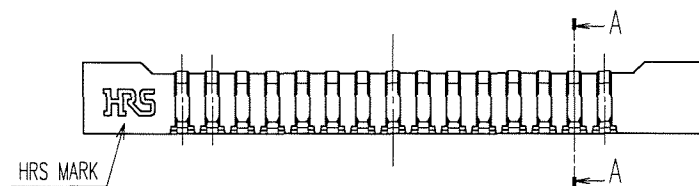
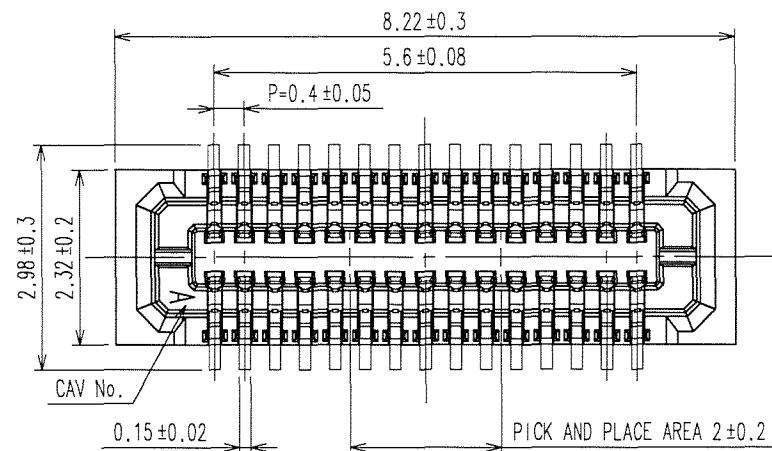


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO

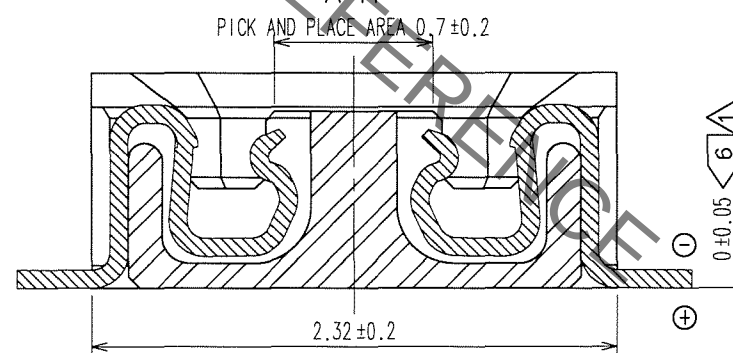

- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 1000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05μm MIN.
SMT LEAD : GOLD 0.05μm MIN.
UNDERPLATING : NICKEL 1μm MIN.
(SURFACE : SEALING)
5. PEEL FORCE OF COVER TAPE REFERS TO JIS C 0806.
6. PROTRUSION OF CONTACT FROM HOUSING UNDERSIDE.

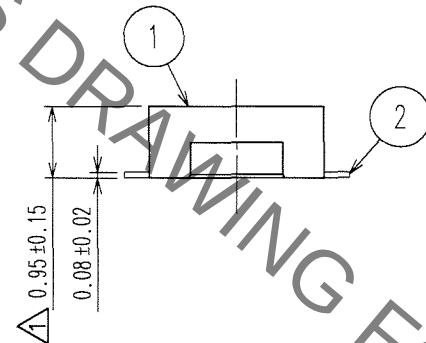


RECOMMENDED METAL MASK
OPENING PATTERN

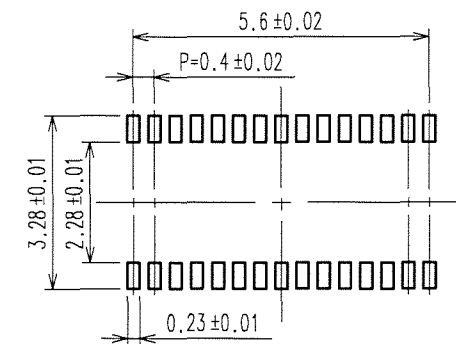



RECOMMENDED SOLDER PASTE: THICKNESS 120μm

RECOMMENDED PATTERN

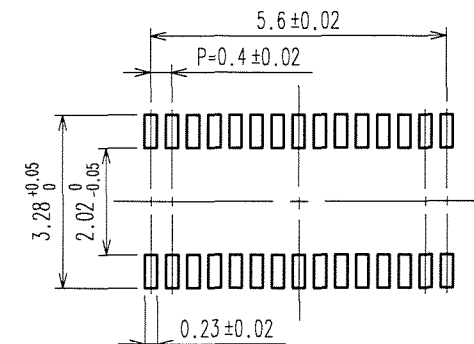

ENGAGEMENT FIGURE

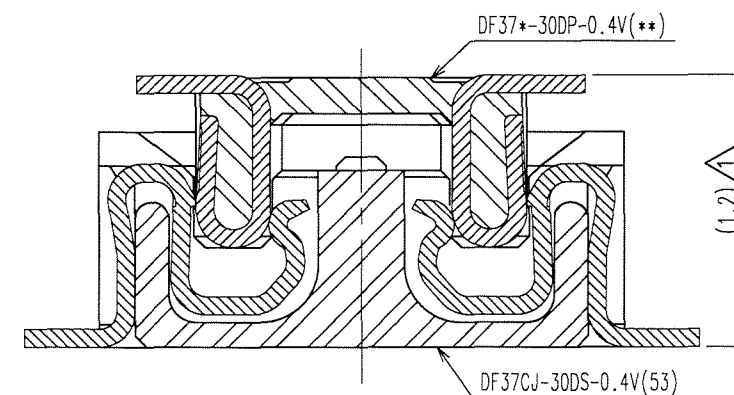

			5	PS	PLASTIC REEL (BLACK)		
2	PHOSPHOR BRONZE	4	4	POLYESTER	CLEAR (COVER TAPE)		
1	LCP	UL94V-0, BLACK		3	PS	CLEAR (EMBOSSSED CARRIER TAPE)	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN N.Yamashiro '07.07.21	DESIGNED T.Ooi '07.07.21	CHECKED K.Ikeda '07.07.23	APPROVED M.Nakamura '07.07.23	
							RELEASED . .
 SCALE FREE UNITS mm			DRAWING NO. EDC3-313144-03			PART NO. DF37CJ-30DS-0.4V(53)	
HIROSE ELECTRIC CO., LTD			CODE NO. CL684-3048-6-53			1/	

Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

