
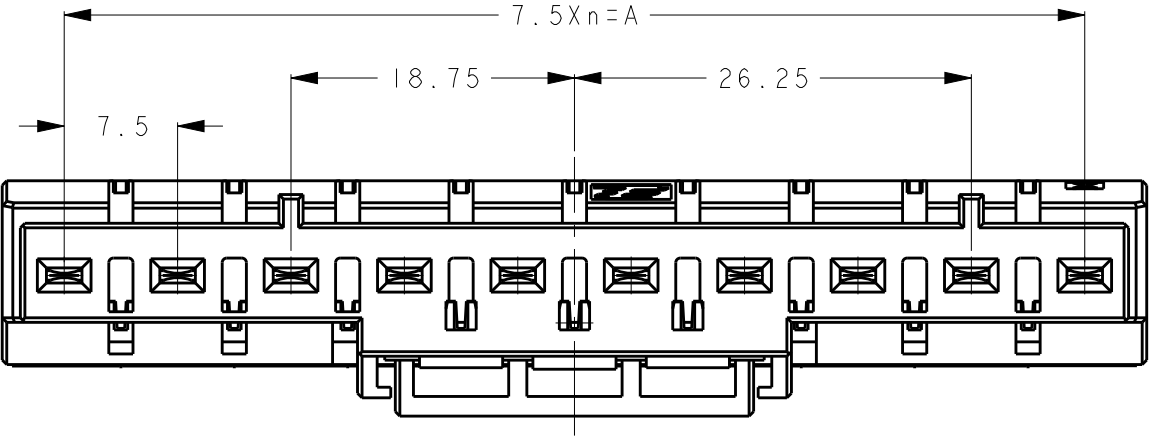
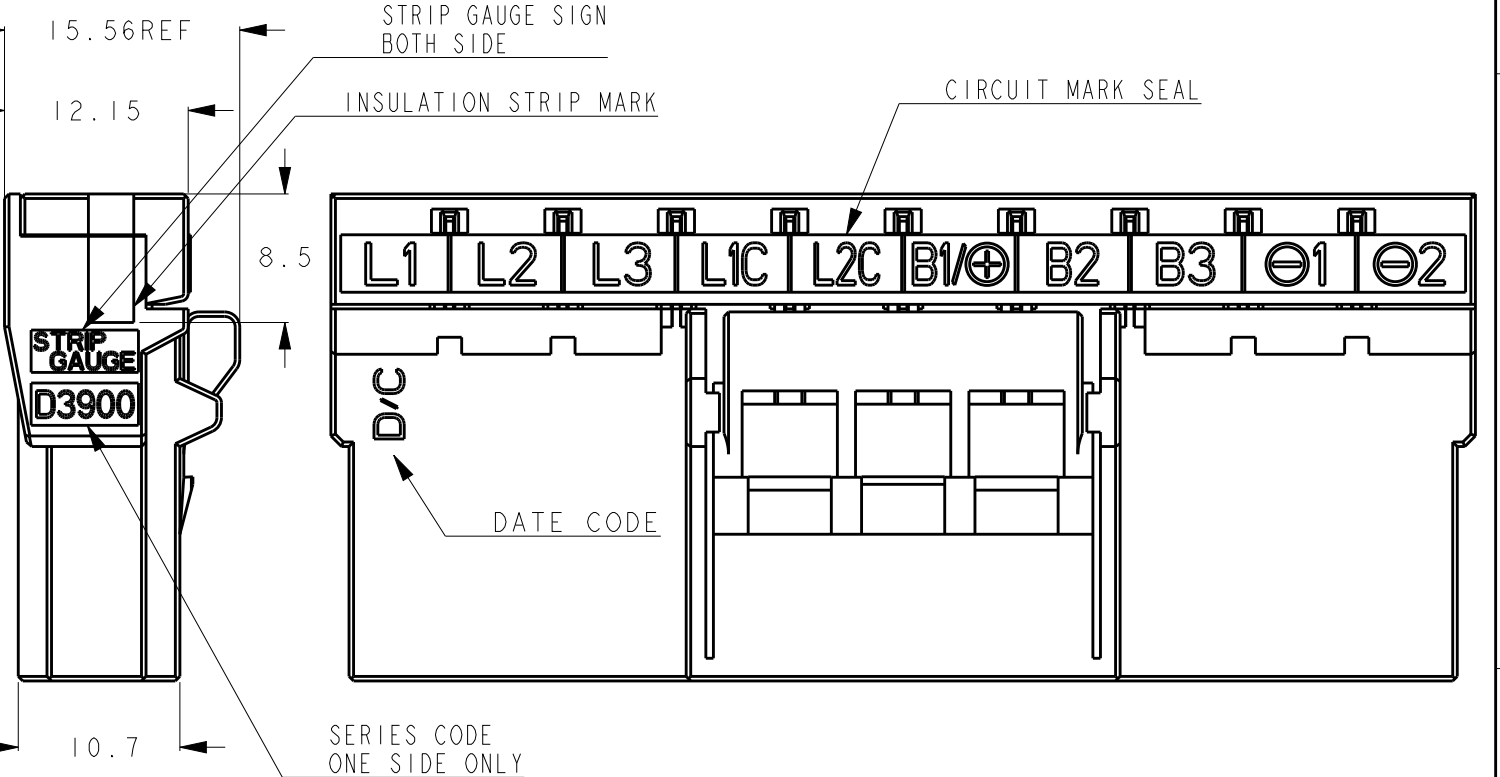


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-		C	REVISED	15APR2014	H.O
			D	REVISED	17JUN2014	H.O

AS SHOWN : 1-2013522-0 (10POS,X-KEY)

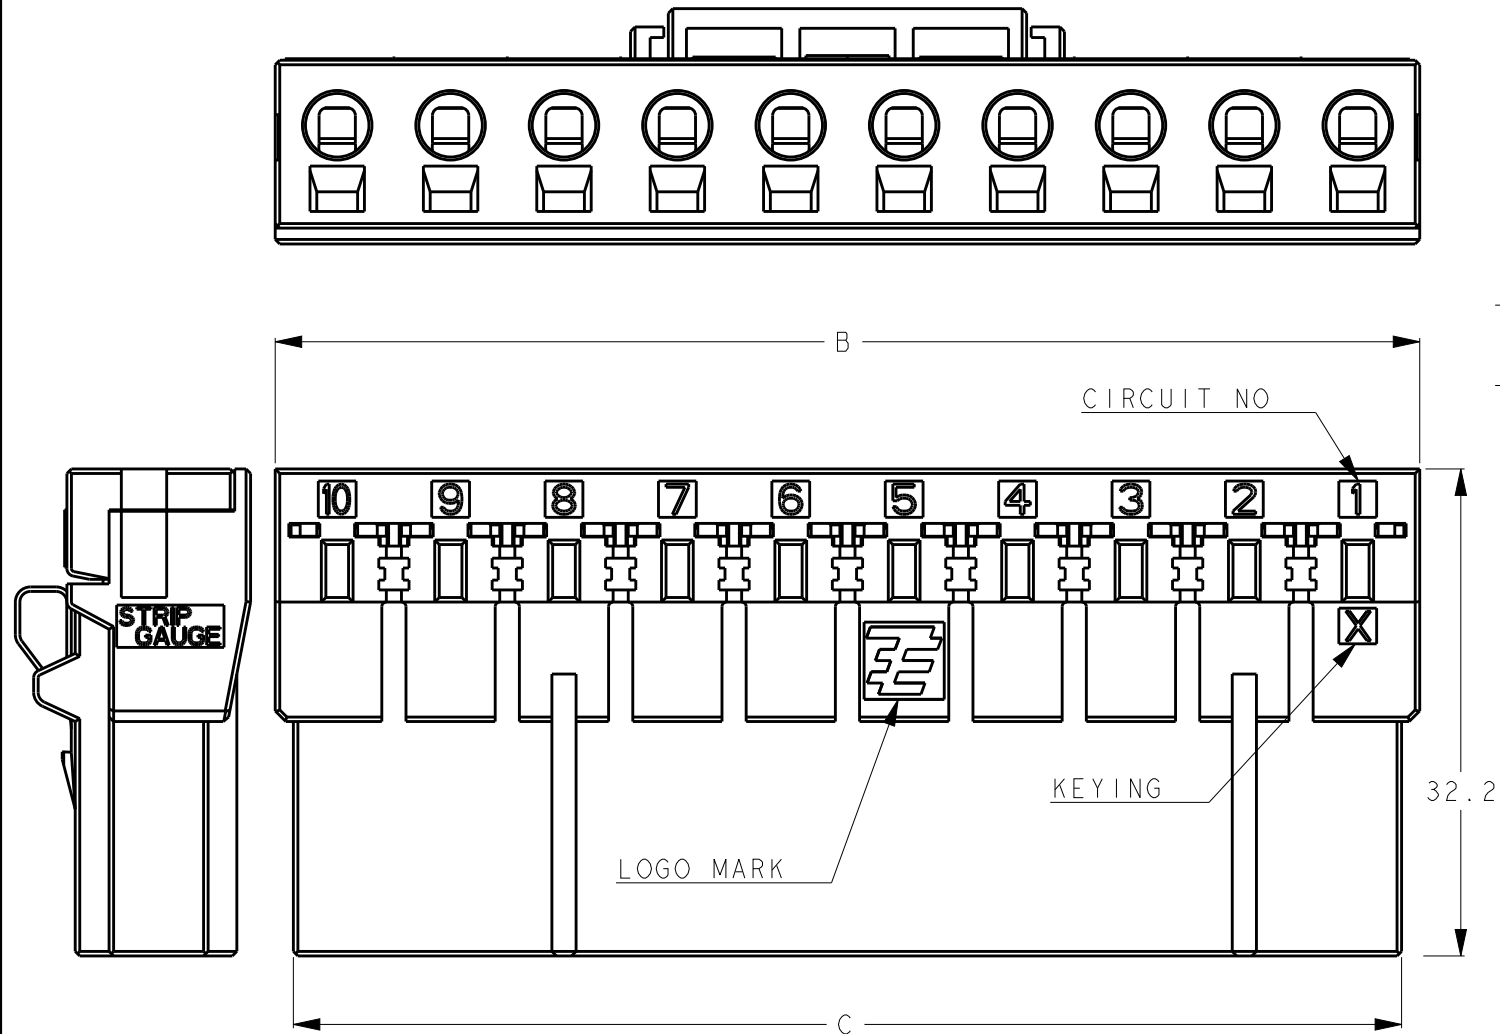

10	Y	9	67.5	75.7	73.3	BLACK	2-2013522-0
10	X	9	67.5	75.7	73.3	BLACK	1-2013522-0
7/10	Z	9	67.9	75.7	73.3	BLACK	9-2013522-0
3	Y	2	15.0	23.2	20.4	NATURAL	4-2013522-3
3	X	2	15.0	23.2	20.4	BLACK	1-2013522-3
POS	KEY	n	A	B	C	COLOR	PART NO

1. 材料:ハウジング:熱可塑性ポリエステル樹脂
コンタクト:銅合金
スプリング:ステンレス
2. めっき:(コンタクト接触部):ニッケル下地めっきの上に金めっき0.38μm以上
3. 取扱説明書411-78272参照
- 1.MATERIAL HOUSING:THERMO PLASTIC POLYESTER
CONTACT:COPPER ALLOY
SPRING:SUS
- 2.FINISH(CONTACT AREA):0.38μmMIN GOLD PLATED OVER NICKEL
- 3.SEE INSTRUCTION SHEET 411-78272

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

MATERIAL
材料

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

一般公差 ±0.3, ±5°
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH
仕上

DWN
T. KUDO
21APR2008

CHK
S. MANABE
21APR2008

APVD
S. MANABE
21APR2008

PRODUCT SPEC
製品規格
108-78400

APPLICATION SPEC
取付適用規格
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
名称
DYNAMIC D3900S 7.5mmPITCH
REC ASSY (SPRING CLAMP TYPE)
3-10POS TYPE-A

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-2013522

RESTRICTED TO
-


SCALE
尺度
2:1

SHEET
1


OF
3

REV
D





LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	-			SEE SHEET 1		

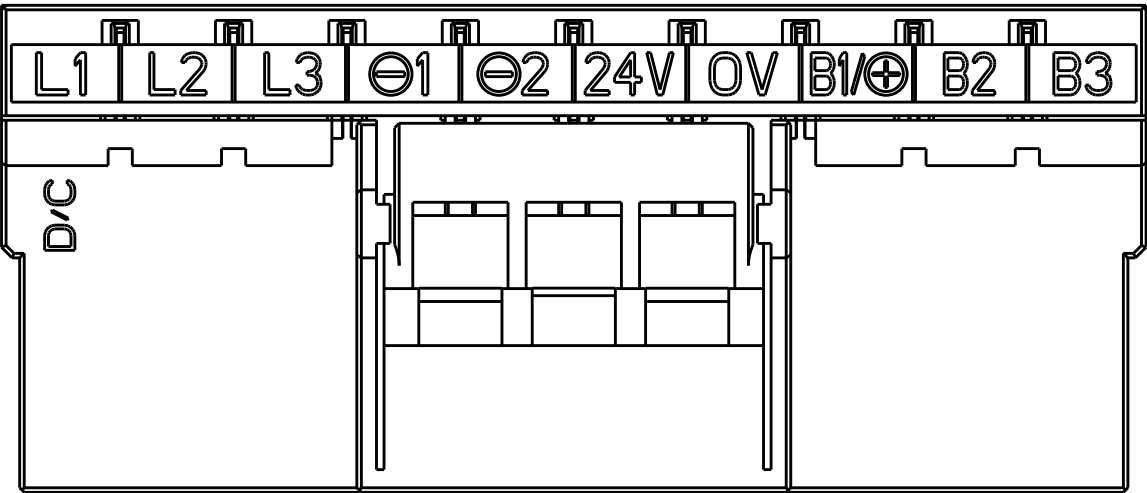


10POS(Y-KEY):2-2013522-0

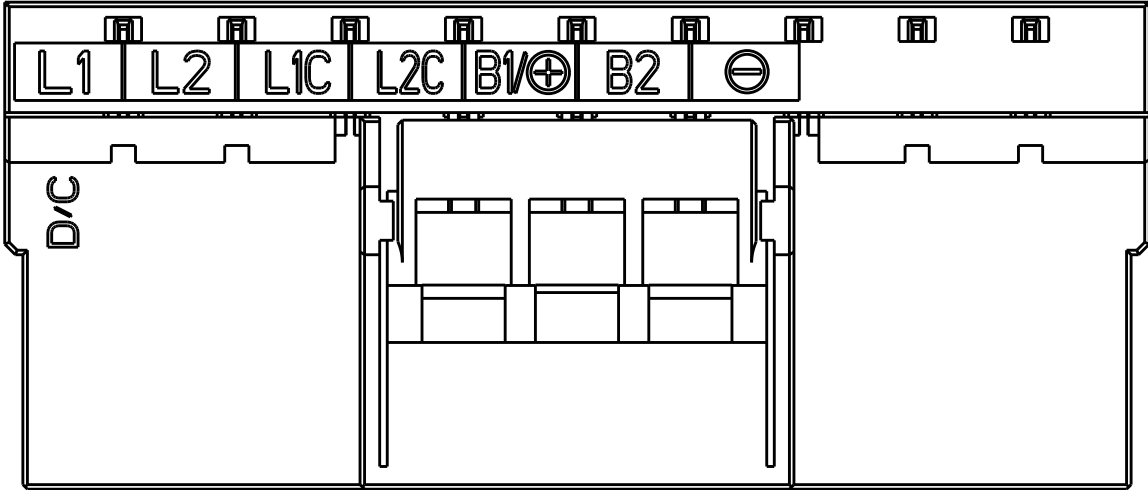

7/10POS(Z-KEY)
CIRCUIT 1~7:9-2013522-0

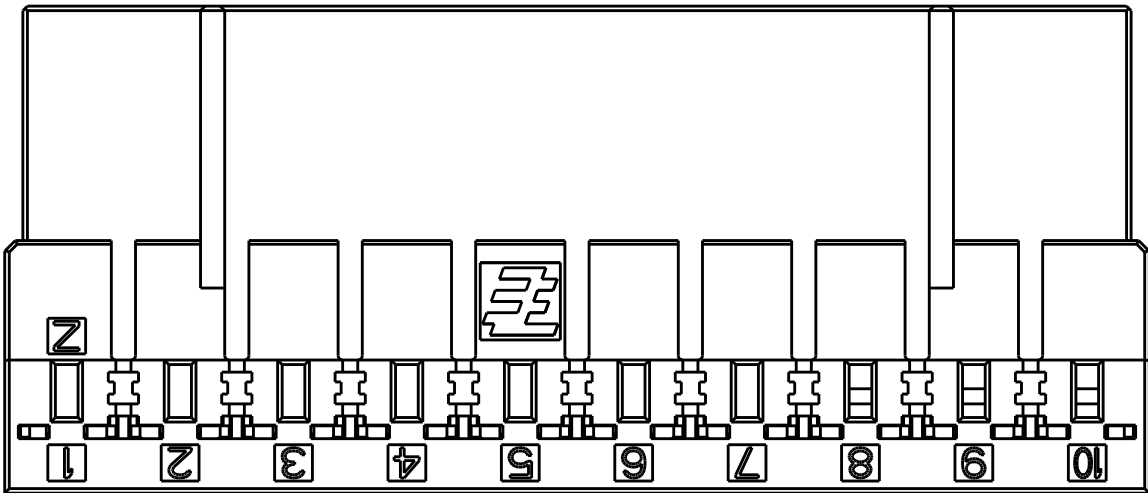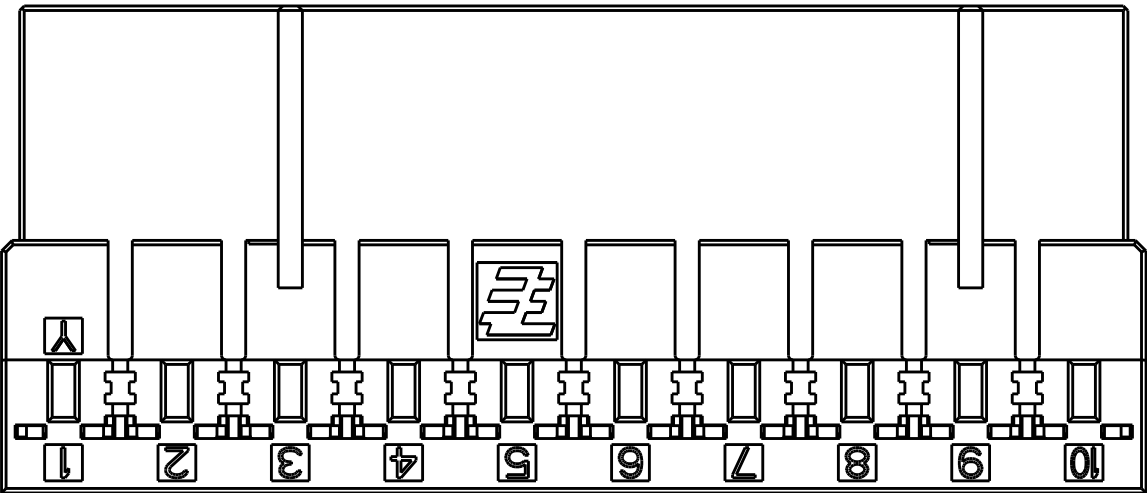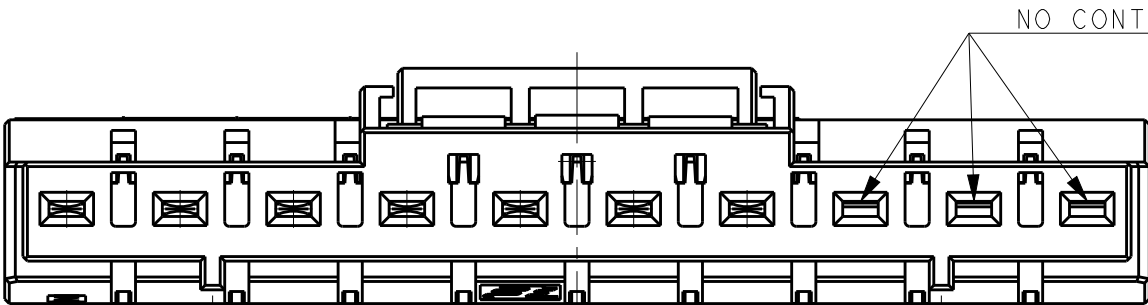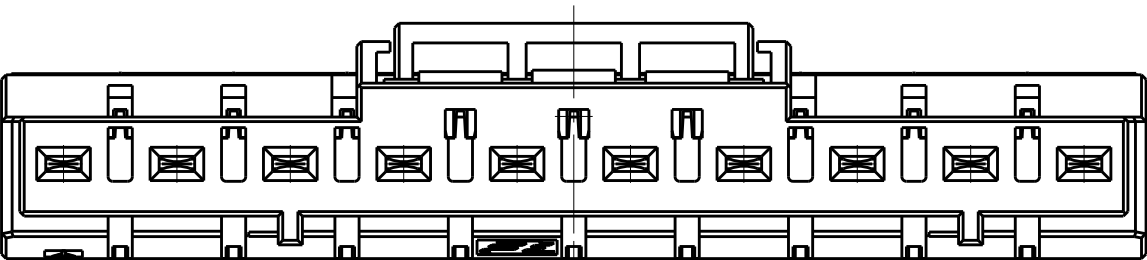

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. KUDO	21APR2008	 TE Connectivity	
DIMENSIONS: mm		CHK S. MANABE	21APR2008		
		APVD S. MANABE	21APR2008	NAME DYNAMIC D3900S 7.5mmPITCH REC ASSY (SPRING CLAMP TYPE) 3-10POS TYPE-A	
		PRODUCT SPEC 108-78400			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		APPLICATION SPEC -		SIZE A3	CAGE CODE 00779
MATERIAL -		WEIGHT -		DRAWING NO C-2013522	
CUSTOMER DRAWING				SCALE 2:1	SHEET 2 OF 3
				REV D	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE


DWN

APVD


SEE SHEET 1

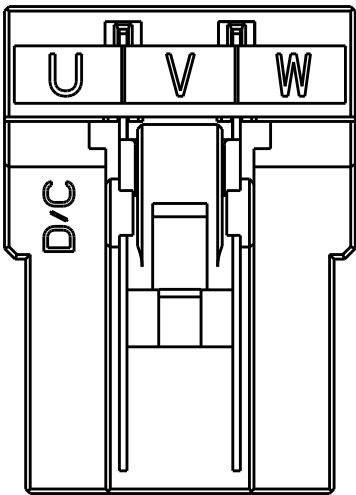


3POS(X-KEY): 1-2013522-3

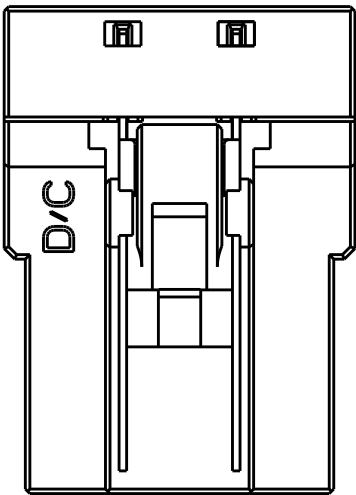



3POS(Y-KEY): 4-2013522-3

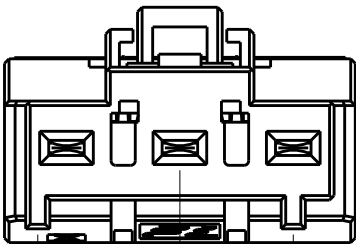

9.4 7.5

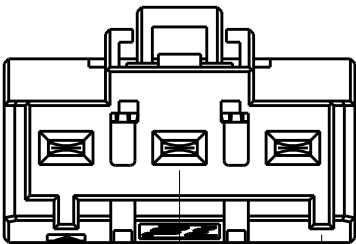

7.5 9.4

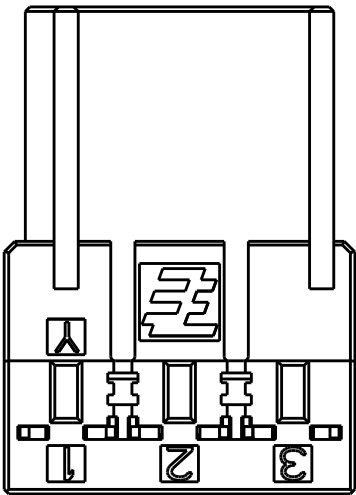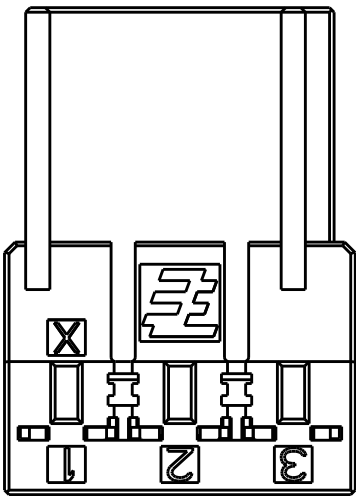

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH

DWN 21APR2008

T. KUDO

CHK 21APR2008

S. MANABE

APVD 21APR2008

S. MANABE

PRODUCT SPEC

108-78400

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME
DYNAMIC D3900S 7.5mmPITCH
REC ASSY (SPRING CLAMP TYPE)
3-10POS TYPE-A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-2013522

SCALE

2:1

SHEET

3

OF

3

REV

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-2013522-0](#)