

40×40×20 mm

San Ace 40 9P type   


General Specifications

- Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 529.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass 45 g

Specifications

The models listed below **have ribs and pulse sensors.**


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow		Max. static pressure		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
109P0405J601	5	4.5 to 5.5	0.46	2.3	9800	0.28	9.9	98.5	0.396	39	-20 to +70	40000/60°C
109P0405H601			0.32	1.6	8000	0.225	8.0	65.7	0.264	33		
109P0405F601			0.25	1.25	6500	0.183	6.5	45.1	0.181	28		
109P0405M601			0.12	0.6	5000	0.136	4.8	26.5	0.106	24		
109P0412G601	12	7 to 13.8	0.28	3.36	12500	0.35	12.4	153.8	0.618	44	-20 to +60	40000/60°C
109P0412D601			0.18	2.16	11000	0.31	10.9	124	0.498	42		
109P0412E601			0.13	1.56	9200	0.26	9.2	87.3	0.351	37		
109P0412H601			0.11	1.32	8000	0.225	8.0	65.7	0.264	33		
109P0412F601			0.09	1.08	6500	0.183	6.5	45.1	0.181	28		
109P0412M601		8 to 13.8	0.06	0.72	5000	0.136	4.8	26.5	0.106	24	-20 to +70	60000/60°C
109P0424G601	24	12 to 27.6	0.15	3.6	12500	0.35	12.4	153.8	0.618	44		
109P0424D601		12 to 27.6	0.13	3.12	11000	0.31	10.9	124	0.498	42		
109P0424H601		12 to 27.6	0.07	1.68	8300	0.233	8.2	69.6	0.28	35		
109P0424F601		14 to 27.6	0.06	1.44	6500	0.183	6.5	45.1	0.181	28		
109P0424B601		20.4 to 27.6	0.06	1.44	5200	0.14	4.9	28.3	0.114	25		

Other sensor specifications are available as options. Refer to the index (pp. 543 to 544).

Airflow - Static Pressure Characteristics


109P0405J601 With pulse sensor

Operating voltage range

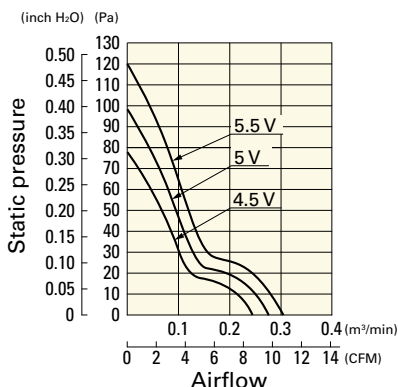


109P0405H601 With pulse sensor

Operating voltage range

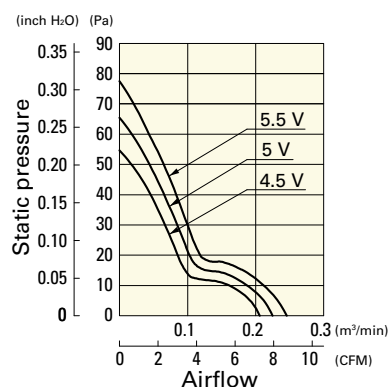

109P0405F601 With pulse sensor


Operating voltage range

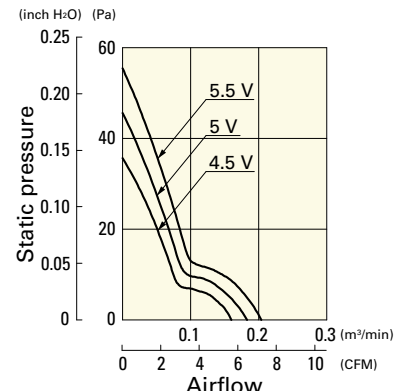

Airflow - Static Pressure Characteristics


109P0405M601 With pulse sensor

Operating voltage range

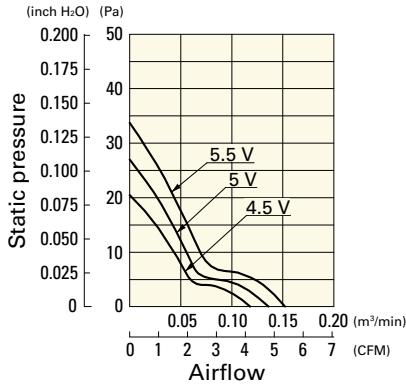


109P0412G601 With pulse sensor

Operating voltage range

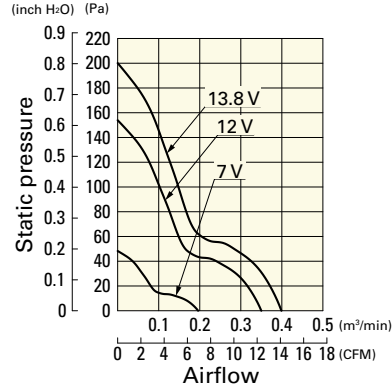


109P0412D601 With pulse sensor

Operating voltage range

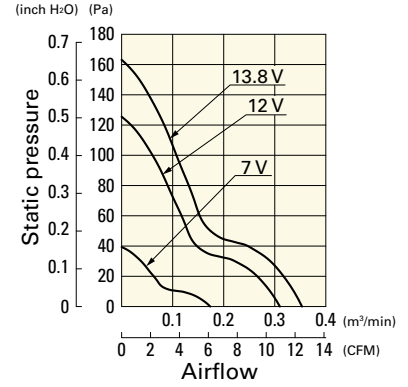


109P0412E601 With pulse sensor

Operating voltage range

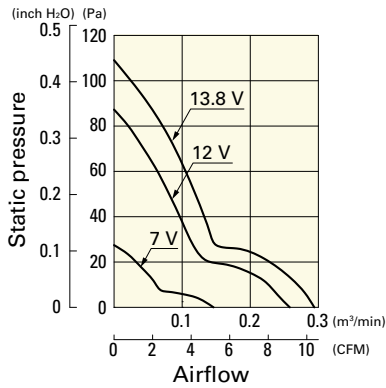


109P0412H601 With pulse sensor

Operating voltage range

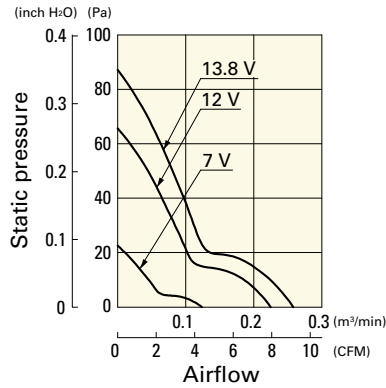


109P0412F601 With pulse sensor

Operating voltage range

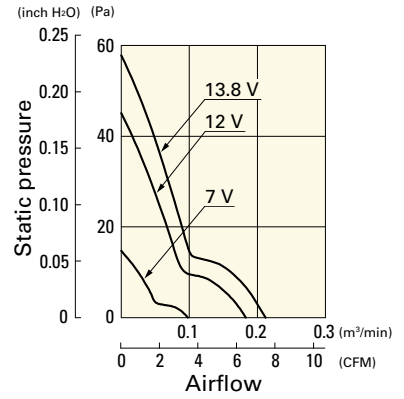


109P0412M601 With pulse sensor

Operating voltage range

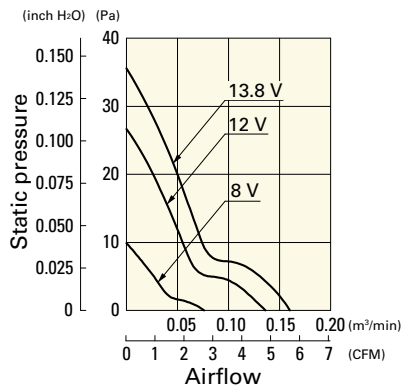


109P0424G601 With pulse sensor

Operating voltage range

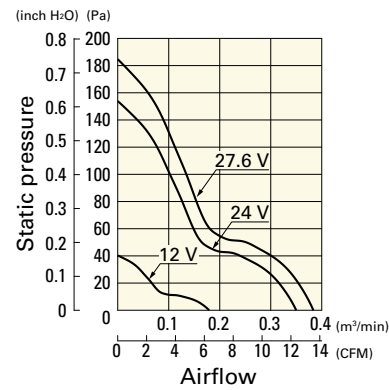


109P0424D601 With pulse sensor

Operating voltage range

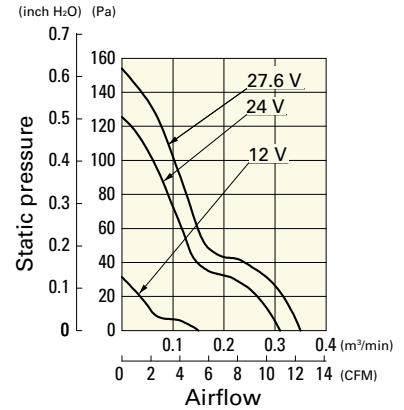


109P0424H601 With pulse sensor

Operating voltage range

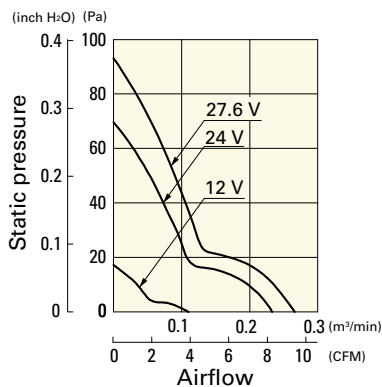


109P0424F601 With pulse sensor

Operating voltage range

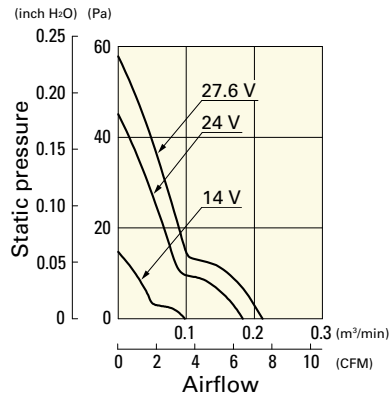


109P0424B601 With pulse sensor


Operating voltage range

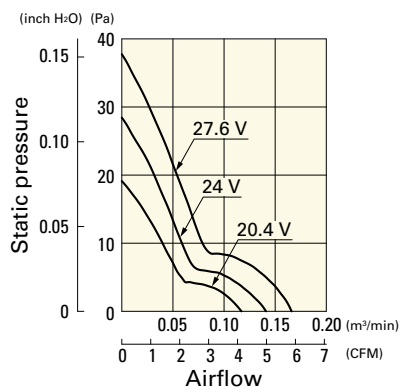

■ Dimensions (unit: mm)

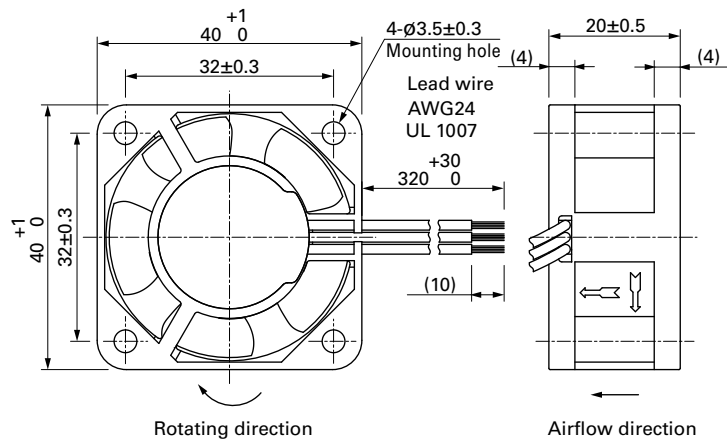

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

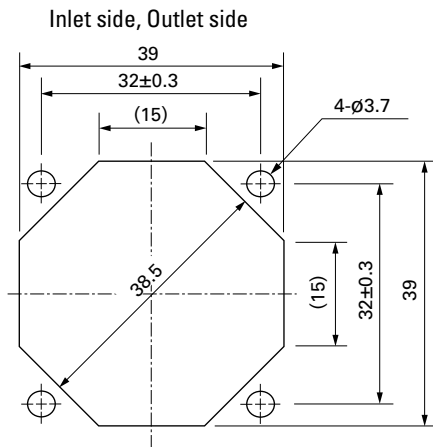

■ Options

Finger guards

page: p. 513

Model no.: 109-059, 109-059H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[109P0405M3013](#) [109P0405M3D01](#) [109P0405F3D01](#) [109P0405H301](#) [109P0405F302](#) [109P0405F301](#)
[109P0405H302](#)