




①

5

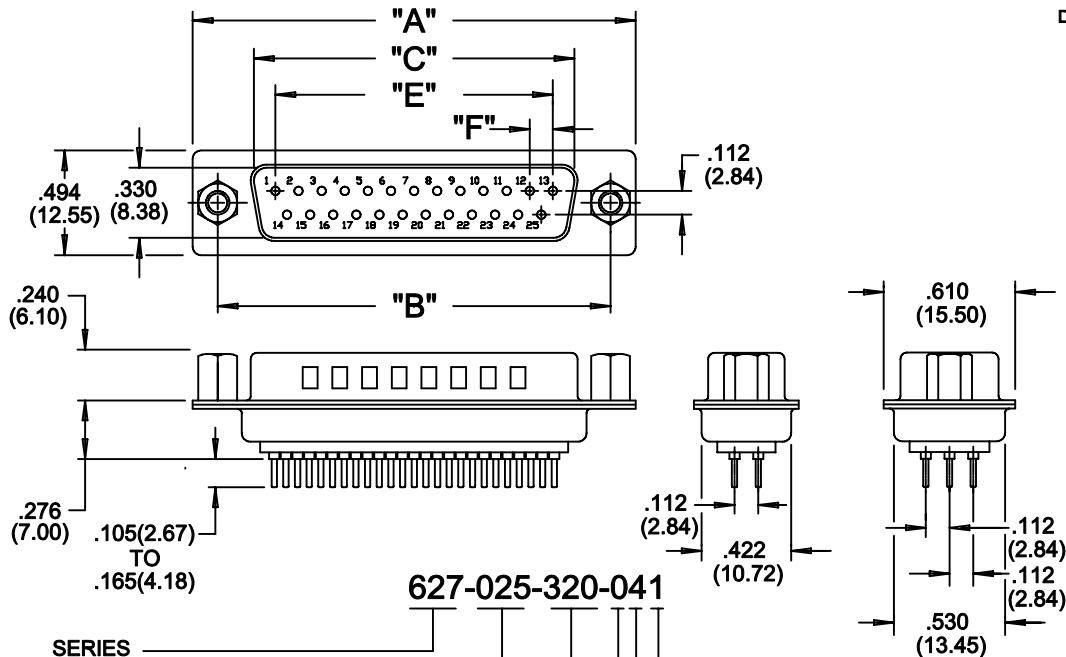

NOTE: ALL CONNECTORS WITH THREADED INSERTS MUST WITHSTAND A MIN. TORQUE OF 3 Kgf-cm

NUMBER OF CONTACTS	"A"		"B"		"C"		"E"		"F"	
	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)
9	1.214	(30.84)	.984	(24.99)	.667	(16.92)	.432	(10.97)	.108	(2.74)
15	1.545	(39.24)	1.312	(33.32)	.994	(25.25)	.756	(19.20)	.108	(2.74)
25	2.088	(53.04)	1.852	(47.04)	1.534	(38.96)	1.304	(33.12)	.109	(2.76)
37	2.730	(69.34)	2.500	(63.50)	2.182	(55.42)	1.956	(49.68)	.109	(2.76)
50	2.645	(67.18)	2.406	(61.11)	2.080	(52.83)	1.740	(44.20)	.109	(2.76)

SERIES _____

NUMBER OF CONTACTS (*) _____

CONTACT FINISH CODE _____

CONNECTOR MATERIAL CODE: _____

0- BRASS

5- BRASS HIGH TEMP INSULATOR

GROUNDING FEATURE _____

4- METAL COVERED ONLY

MOUNTING OPTIONAL _____

1- .125(3.18) DIA. THROUGH HOLE

2- 4-40 UNC THREADED INSERT

3- 4-40 UNC HEX THREADED STANDOFF

6- 4-40 UNC THREADED INSERT WITH BOARDLOCKS

7- 4-40 UNC THREADED STANDOFF WITH BOARDLOCKS

8- 4-40 UNC THREADED FIXED STANDOFF _____

EODAC

5



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

[627-050-221-042](#) [627-050-220-046](#) [627-050-220-047](#)