
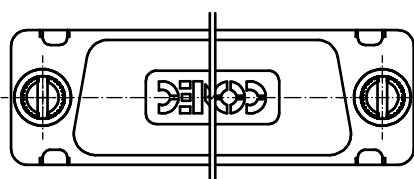

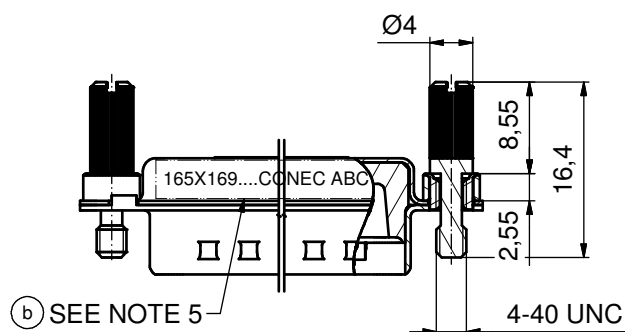
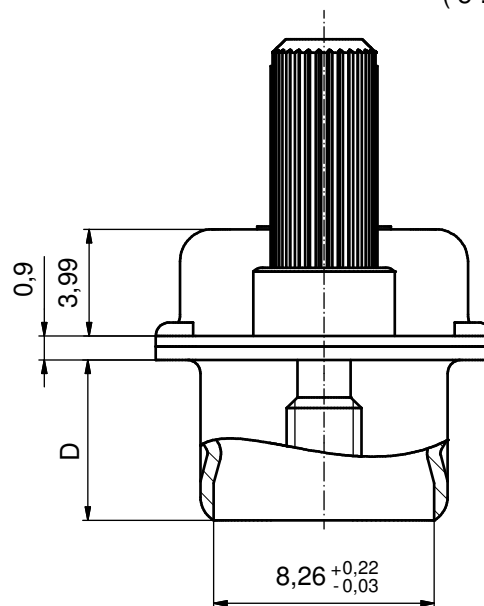


No. of pos.	A _{-0,76}	B _{+0,25}	C	D _{-0,3}	Part-No.
9	31,19	16,79	25,00 ^{+0,12} _{-0,13}	6,12	165X16909X
15	39,52	25,12	33,30 ^{+0,15} _{-0,1}	6,12	165X16919X
25	53,42	38,84	47,04 ^{±0,13}	5,99	165X16929X
37	69,70	55,30	63,50 ^{±0,13}	5,99	165X16939X


(5:1)

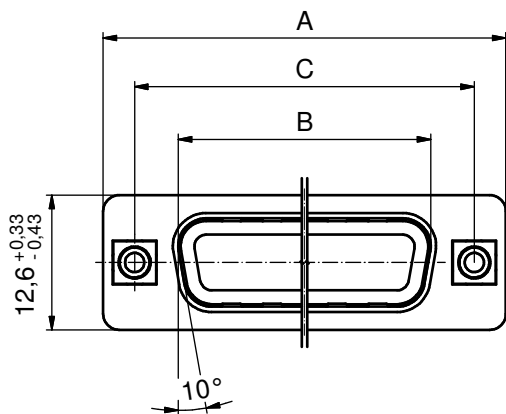

NOTES:

1. METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
2. INSULATOR: TPE
3. THREADED INSERTS: BRASS
4. SCREW: STEEL; NICKEL PLATED

5. CONNECTOR IS PART MARKED: **PART NO. CONEC ABC**

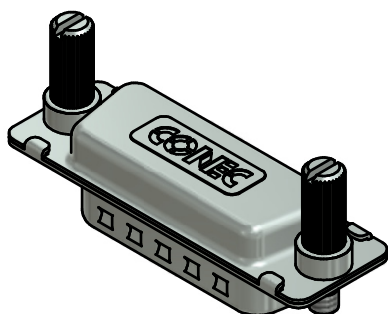

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)		
							material: SEE NOTES		
							title: HOOD 9-37pos. b WATER RESISTANT AND SHIELDED; FOR EMI/RFI for socket connector, with jack screws		
						date		name	
				drawn	05.10.05	Lehmenkühler		dwg no: 16K1A1514 part no: SEE TABLE	DIN-A3 sh: 1
				appd.	05.10.05	Mickenbecker			
				norm					
				d-old					
DO NOT ALTER CAD DRAWING BY HAND									
3 x b	Ä4840	30.07.2013	K.H.						
a	Original								
rev.	description	date	name						

CONEC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[165X16929X](#) [165X16939X](#) [165X16919X](#)