




PART NUMBER	ITEM ① BODY	ITEM ② BASE	ITEM ③ CONTACT	ITEM ④ INTERFACE	ITEM ⑤ INSULATOR	ITEM ⑥ INSULATOR	REMARKS
131-3801-301	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	TEFLON	
131-3801-304	COPPER SILVER PL .00005 MIN OVER COPPER PL .000075 MIN	COPPER SILVER PL .00005 MIN OVER COPPER PL .000075 MIN	BERYLLIUM COPPER SILVER PL .00005 MIN OVER COPPER PL .000075 MIN	BERYLLIUM COPPER SILVER PL .00005 MIN OVER COPPER PL .000075 MIN	TEFLON	TEFLON	
131-3801-306	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	TEFLON	
131-3801-316	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	TEFLON	TEFLON	
131-3801-317	BRASS $\Delta$ NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	TEFLON	TEFLON	$\Delta$ $\Delta$

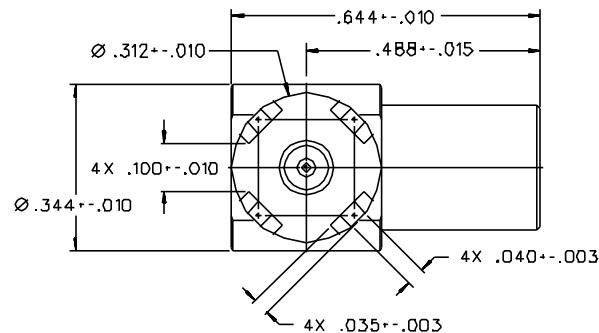

MOUNTING HOLE LAYOUT

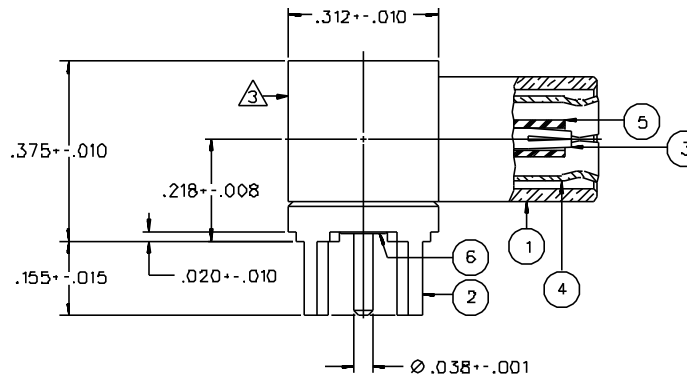

# NOTES:

## 1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
FREQUENCY RANGE: 0-4 GHz  
VSWR: NOT APPLICABLE  
WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL  
INSULATION RESISTANCE: 1000 MEGOHM MIN  
CONTACT RESISTANCE:  
CENTER CONTACT - INITIAL 6 MILLIOHM MAX, AFTER ENVIRONMENTAL 8 MILLIOHM MAX  
OUTER CONDUCTOR - GOLD PLATED INITIAL 1 MILLIOHM MAX, AFTER ENVIRONMENTAL 1.5 MILLIOHM MAX  
NICKEL PLATED INITIAL 2.5 MILLIOHM MAX, AFTER ENVIRONMENTAL 3.5 MILLIOHM MAX  
BRAID TO BODY - NOT APPLICABLE  
CORONA LEVEL: NOT APPLICABLE  
INSERTION LOSS: NOT APPLICABLE  
RF LEAKAGE: NOT APPLICABLE  
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 600 VRMS MIN AT 4 AND 7 MHZ

## MECHANICAL:





ENGAGE/DISENGAGE FORCE: INITIAL 14 LBS MAX AFTER DURABILITY 14 LBS MAX  
ENGAGEMENT, 2 LBS MIN DISENGAGEMENT  
MATING TORQUE: NOT APPLICABLE  
COUPLING PROOF TORQUE: NOT APPLICABLE  
COUPLING NUT RETENTION: NOT APPLICABLE  
CONTACT RETENTION: 4 LBS MIN AXIAL FORCE  
CABLE ACCEPTABILITY: NOT APPLICABLE  
CABLE HEX CRIMP SIZE: NOT APPLICABLE  
CABLE RETENTION: NOT APPLICABLE  
DURABILITY: 500 CYCLES MIN

## ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012)  
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B  
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C  
CORROSION: MIL-STD-202, METHOD 101, CONDITION B  
SHOCK: MIL-STD-202, METHOD 213, CONDITION B  
VIBRATION: MIL-STD-202, METHOD 204, CONDITION B

$\Delta$  CONNECTOR MOUNTING LEADS 50%/50% TIN/LEAD DIPPED (SOLDER PLATE).

$\Delta$  MARKED WITH EIA DATE CODE.

DRAWING NO. C - 131-3801-301/320			
0	REVISIONS		
CHANGED: REVISED AND REDRAWN. WAS "D" SIZE, DATED 11-10-85. DIA .344+-.010 WAS .281+-.010, .375+-.010 WAS .357+-.010, .644 +-.010 WAS .645+-.010			
06	03-09-88	EJ/RJB	4-13-88 ECO 23316
ADDED: NOTE 3 DELETED: 131-3801-307.			
7	8-13-90	  	
ADDED: P/N 131-3801-304			
8	11-19-96	RH	ECN 44401
CHANGED: P/N 131-3801-304, ITEMS 1 AND 2 COPPER WAS BRASS ..... * REVISION NUMBER FOLLOWED BY AN ALPHA * * CHARACTER INDICATES DRAWING CLARIFICATION * * CAUTION ON PART NUMBER ADDITION ONLY. *			
8a	8-16-99	RH	ECN 46449

## CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED  
PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY EJ	DATE 3-9-88	JOHNSON <sup>®</sup> <small>Cinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Warren, MI 48093 1-800-247-8256</small>	
DECIMALS _____ mm	CHECKED BY _____	DATE _____		
.XXX _____	APPROVED BY _____	DATE _____	TITLE PLUG ASSEMBLY RA PC MOUNT SMB, 50 OHM	
MATL _____	APPROVED BY RJB	DATE 4-4-88	CODE NO.	DRAWING NO. C - 131-3801-301/320
FINISH _____	RELEASE DATE 4-13-88		SCALE 5:1	U/M INCH SHEET 2 OF 2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[131-3901-401](#)