


PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE 500V AC (CONT / CONT)
- OPERATING TEMPERATURE -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75 N MAX /CONT
- EXTRACTION FORCE: 0.15 N MIN /CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF-LEAD FREE
 - PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNIZED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS,A,201572,001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

LAY OUT
P.C.B. -HOLE

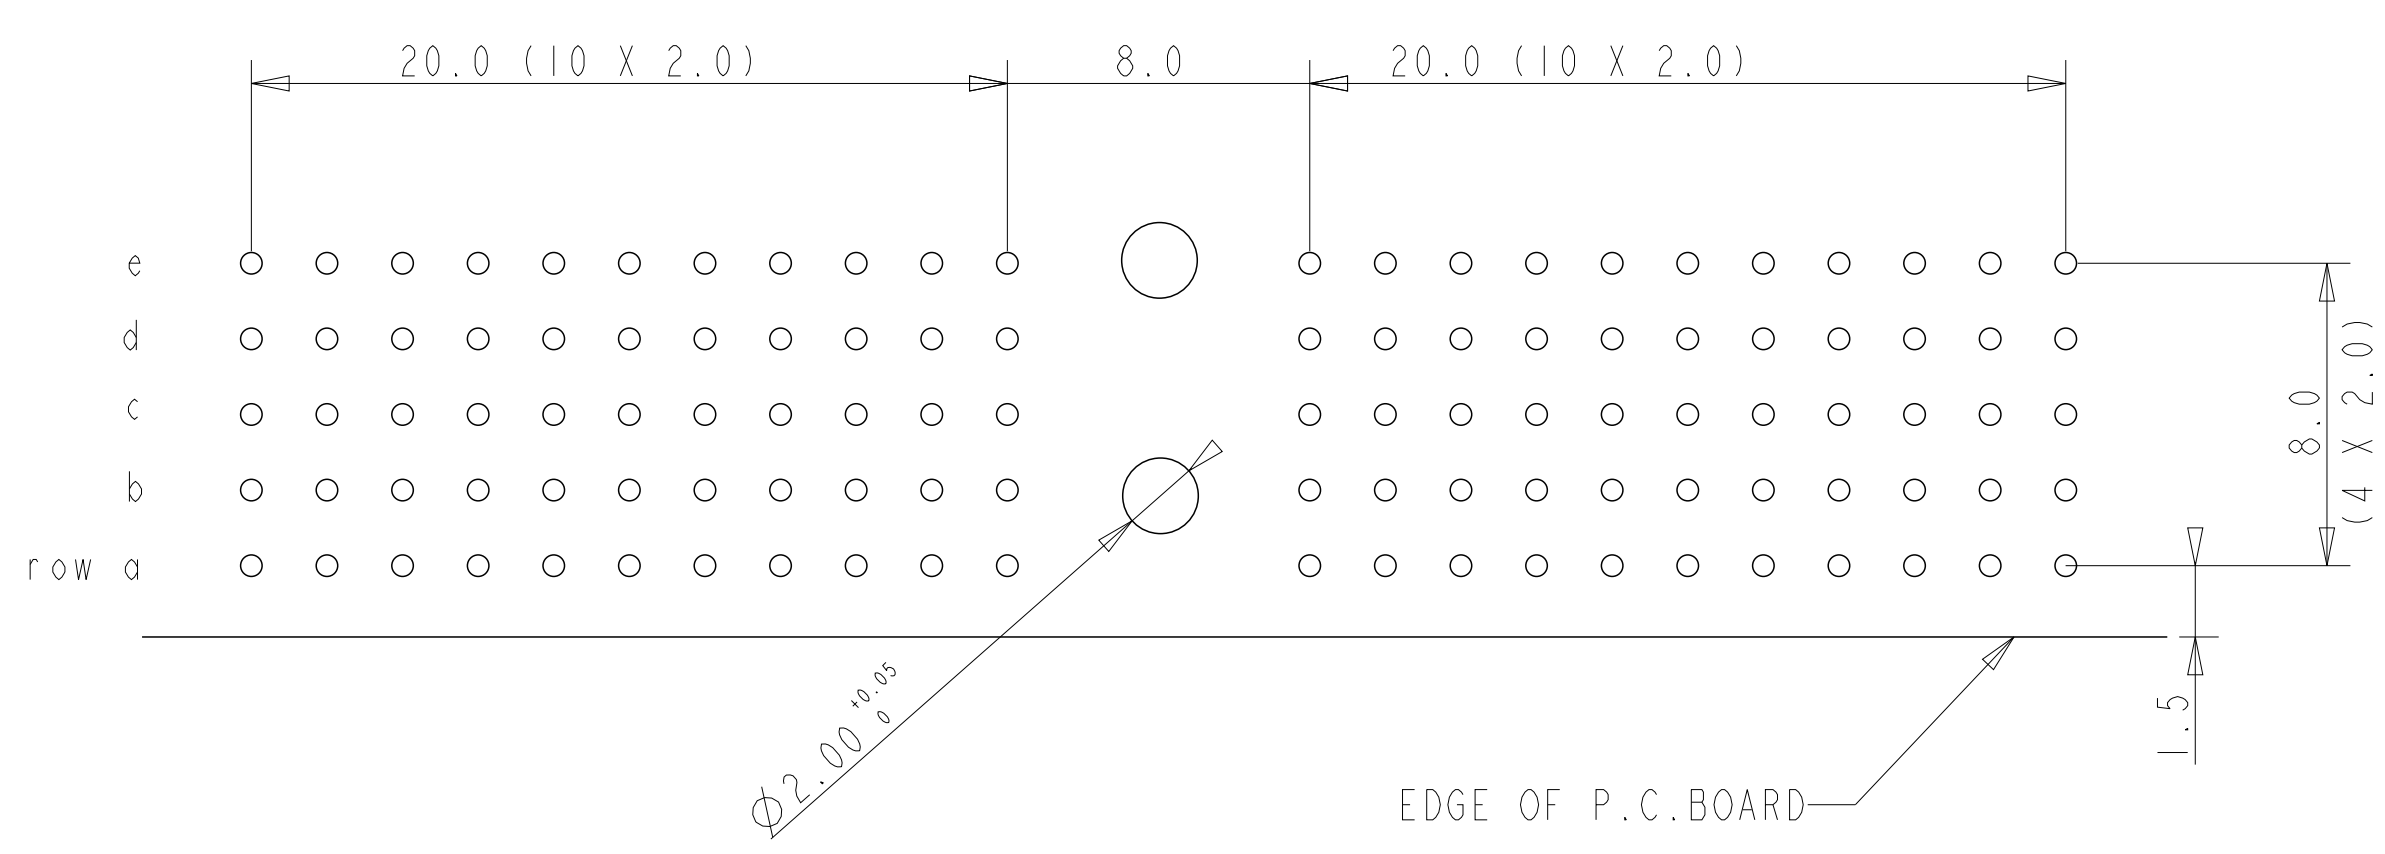

Material		Spec ref	
Ma code	tolerance	projection	
Heat treat	✓	300C ± 0.2 10SEC	↔
Plating/Finish	✓	300C ± 0.1 10SEC	↔
Dr	4 2 92	J.V.B	↔
Eng	w.wadmm	20060921	↔
Chr		20110417	↔
Appr			↔
Product family		MILLIPACS	↔
Model Name		HM2R01PA5100	↔
Model Revision			↔
REL Level		Released	↔
Project		MPACS 5+2R RA RCP	↔
Part No		CONN TYPE A	↔
Spec ref		BS,C,201418,001	↔
Project file		HM2R01PA5100----	↔
Catalog no		CUSTOMER DRAWING	↔
Sheet		1 of 1	↔

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R01PA5100N9LF](#) [HM2R01PA5100L9LF](#) [HM2R01PA5100N9JLF](#)