


1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

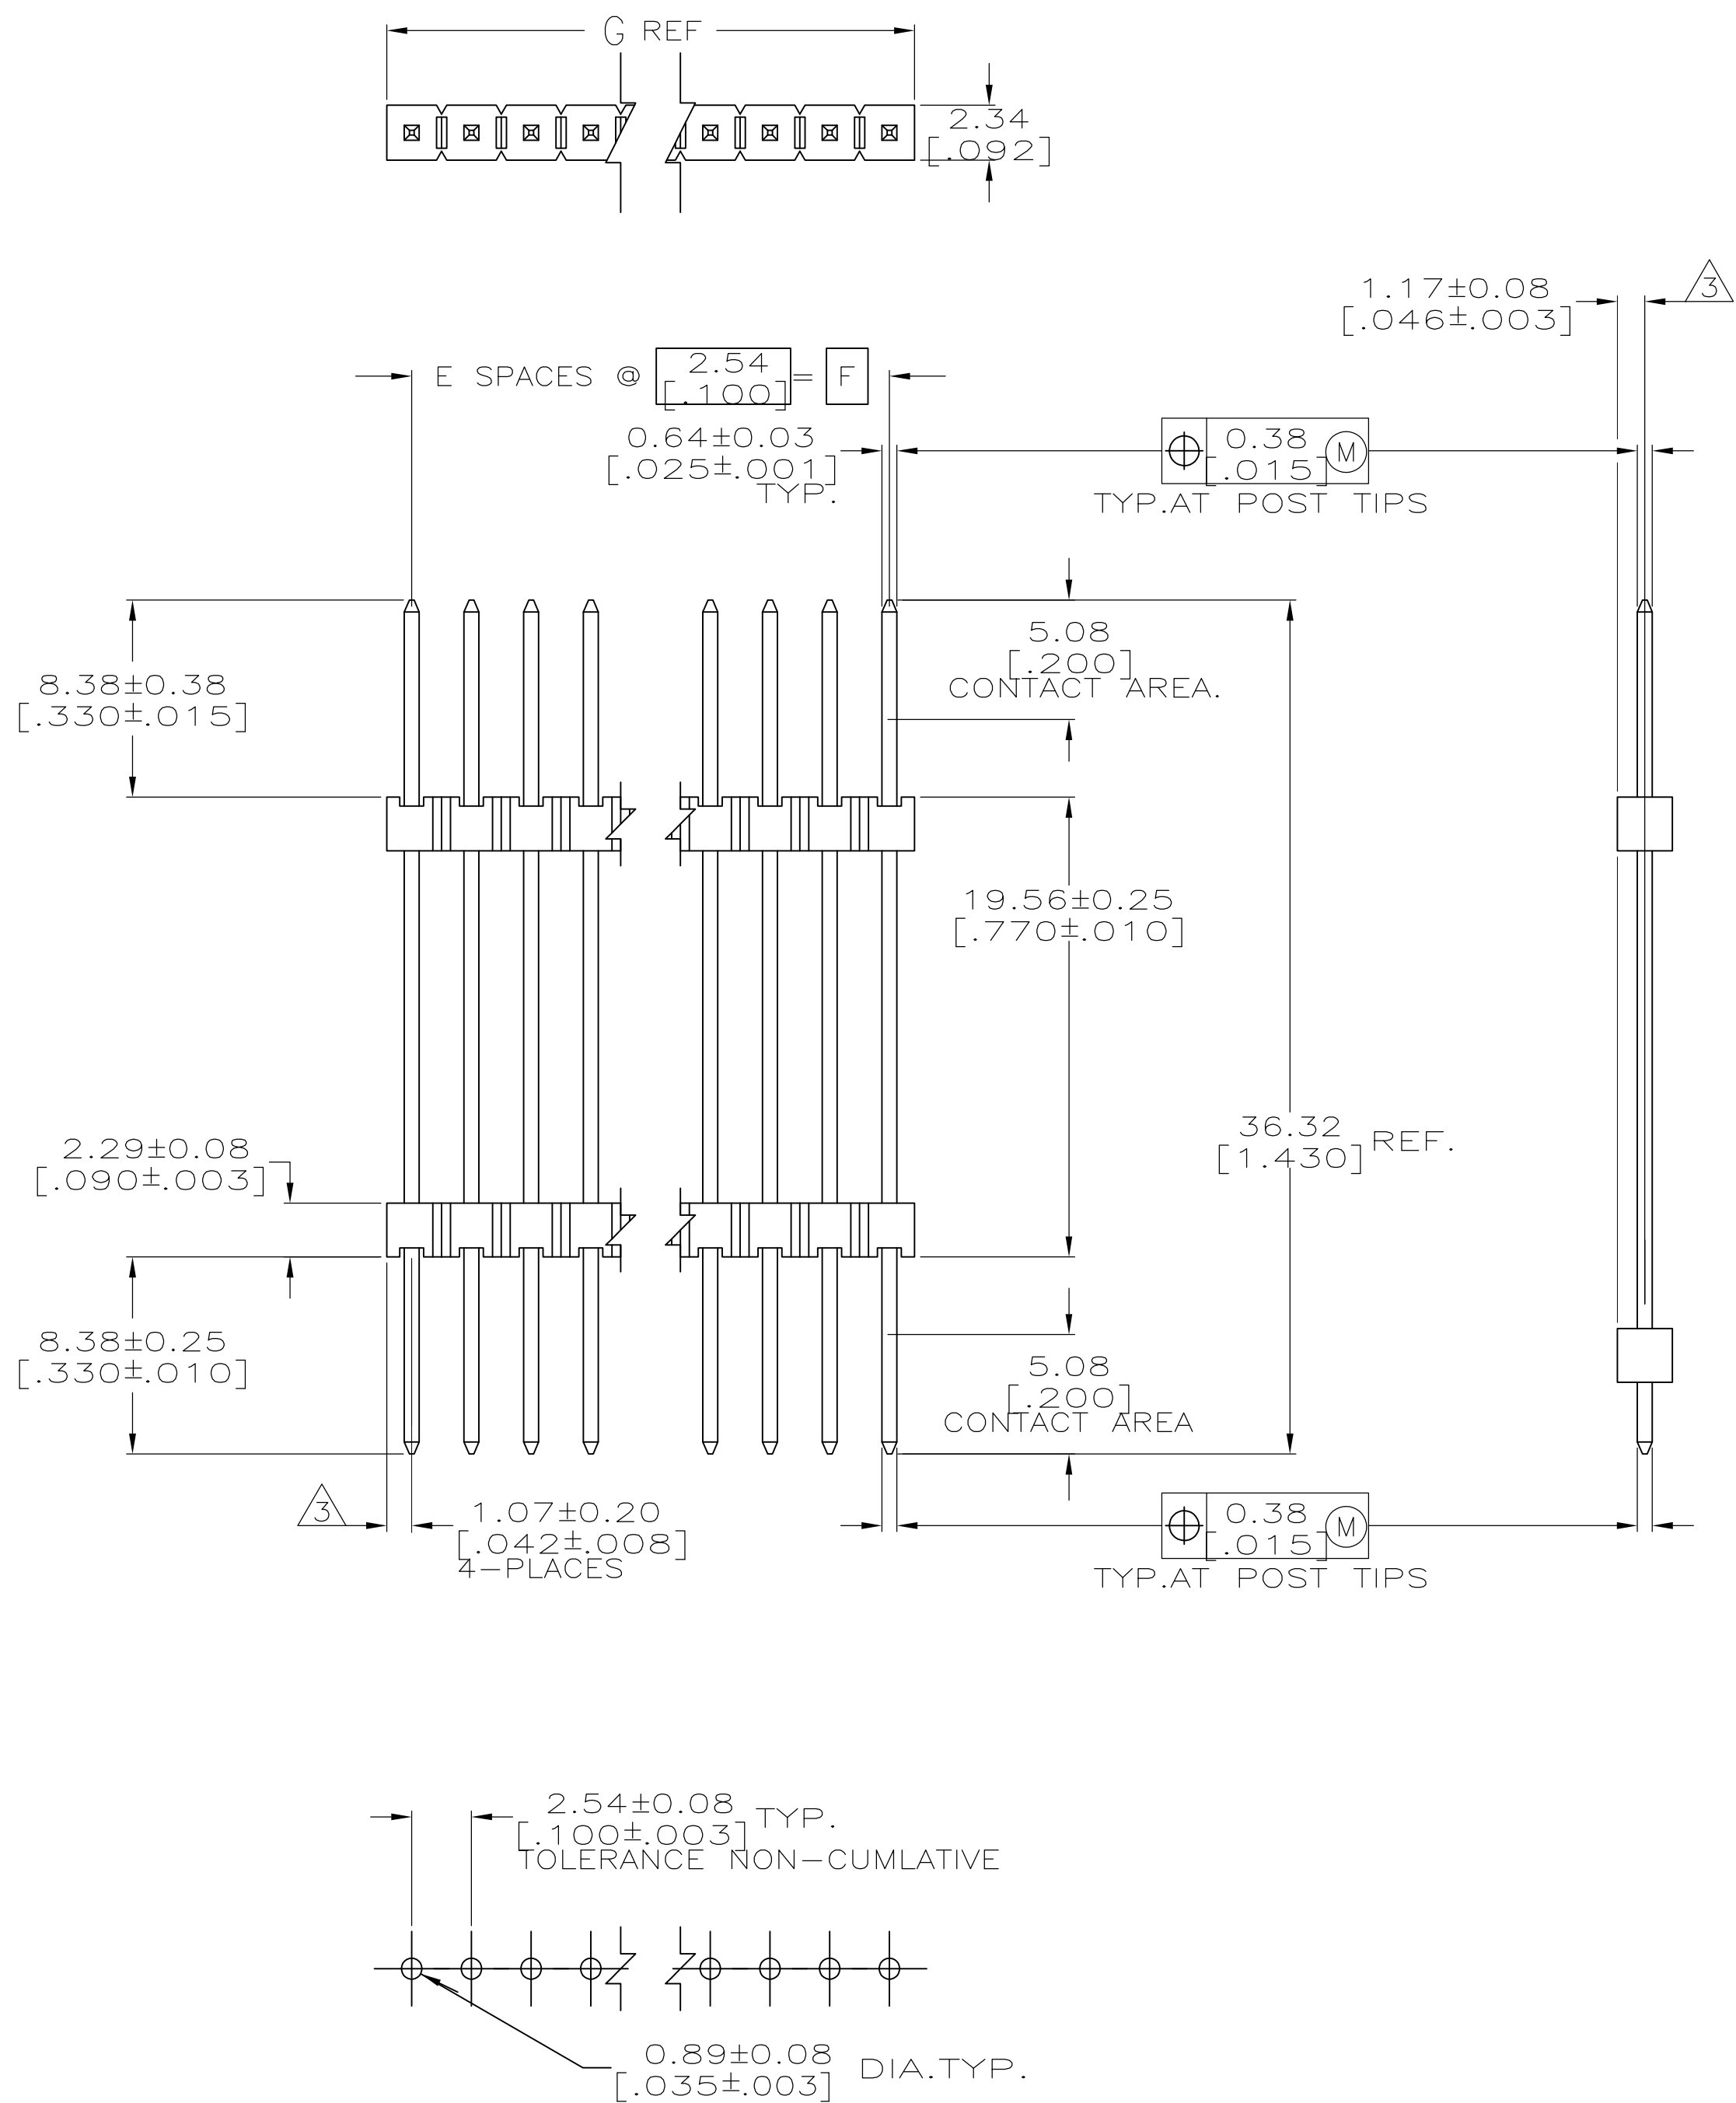

RECOMMENDED HOLE LAYOUT

[01.19 [3.984]	99.06 [3.900]	39	40	4-146482-0
[98.65 [3.884]	96.52 [3.800]	38	39	3-146482-9
[96.11 [3.784]	93.98 [3.700]	37	38	3-146482-8
[93.57 [3.684]	91.44 [3.600]	36	37	3-146482-7
[91.03 [3.584]	88.90 [3.500]	35	36	3-146482-6
[88.49 [3.484]	86.36 [3.400]	34	35	3-146482-5
[85.95 [3.384]	83.82 [3.300]	33	34	3-146482-4
[83.41 [3.284]	81.28 [3.200]	32	33	3-146482-3
[80.87 [3.184]	78.74 [3.100]	31	32	3-146482-2
[78.33 [3.084]	76.20 [3.000]	30	31	3-146482-1
[75.79 [2.984]	73.66 [2.900]	29	30	3-146482-0
[73.25 [2.884]	71.12 [2.800]	28	29	2-146482-9
[70.71 [2.784]	68.58 [2.700]	27	28	2-146482-8
[68.17 [2.684]	66.04 [2.600]	26	27	2-146482-7
[65.63 [2.584]	63.50 [2.500]	25	26	2-146482-6
[63.09 [2.484]	60.96 [2.400]	24	25	2-146482-5
[60.55 [2.384]	58.42 [2.300]	23	24	2-146482-4
[58.01 [2.284]	55.88 [2.200]	22	23	2-146482-3
[55.47 [2.184]	53.34 [2.100]	21	22	2-146482-2
[52.93 [2.084]	50.80 [2.000]	20	21	2-146482-1
[50.39 [1.984]	48.26 [1.900]	19	20	2-146482-0
[47.85 [1.884]	45.72 [1.800]	18	19	1-146482-9
[45.31 [1.784]	43.18 [1.700]	17	18	1-146482-8
[42.77 [1.684]	40.64 [1.600]	16	17	1-146482-7
[40.23 [1.584]	38.10 [1.500]	15	16	1-146482-6
[37.69 [1.484]	35.56 [1.400]	14	15	1-146482-5
[35.15 [1.384]	33.02 [1.300]	13	14	1-146482-4
[32.61 [1.284]	30.48 [1.200]	12	13	1-146482-3
[30.07 [1.184]	27.94 [1.100]	11	12	1-146482-2
[27.53 [1.084]	25.40 [1.000]	10	11	1-146482-1
[24.99 [.984]	22.86 [.900]	9	10	1-146482-0
[22.45 [.884]	20.32 [.800]	8	9	146482-9
[19.91 [.784]	17.78 [.700]	7	8	146482-8
[17.37 [.684]	15.24 [.600]	6	7	146482-7
[14.83 [.584]	12.70 [.500]	5	6	146482-6
[12.29 [.484]	10.16 [.400]	4	5	146482-5
[9.75 [.384]	7.62 [.300]	3	4	146482-4
[7.21 [.284]	5.08 [.200]	2	3	146482-3
[4.67 [.184]	2.54 [.100]	1	2	146482-2
[2.13 [.084]	- -	-	1	146482-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. BRANDBERG 14-MAR-97 CHK G. DUBNICZKI 14-MAR-97 APP'D G. DUBNICZKI 14-MAR-97		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TO ENRANCES UNLESS OTHERWISE SPECIFIED: 0 P L C ± - 1 P L C ± - 2 P L C ± 0.1[.00] 3 P L C ± 0.127[.005] 4 P L C ± 0.0127[.0005] ANGLES ± - FINISH		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL 		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C-146482	
WEIGHT 		CUSTOMER DRAWING		RESTRICTED TO SCALE 4:1 SHEET 1 OF 1 REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146482-2](#)