


REV. 1
DCO 16052

CUSTOMER DATA SHEET

COIL: @ 25° C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

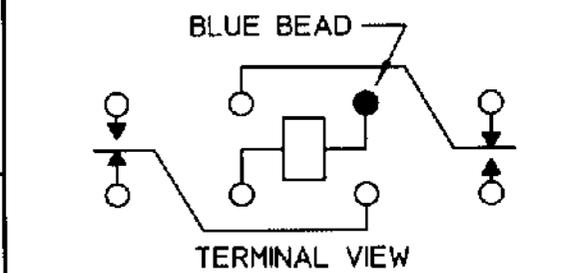

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING: LOW LEVEL TO
3 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

NOTES: OPERATE & RELEASE 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

DR. R.B. 3/30/99 CK.G4H 2-7-00



CUST. C. I. I. STD.
CUST. NO.

TYPE 'FW' RELAY

FW1105G00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FW1105G00](#)