



Socket strip - FRONT-ZFL 1,5/D32 - 2201632

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Spring-cage socket strip, Nominal current: 4 A, Number of positions: 32, Pitch: 5.08 mm, Connection method: Spring-cage connection, Color: green, Contact surface: Tin

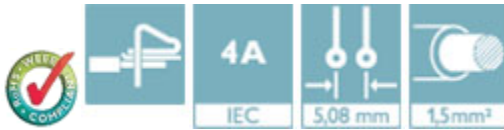

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	65.69 g
Custom tariff number	85366990
Country of origin	China

Technical data

Dimensions

Pitch	5.08 mm
-------	---------

General

Range of articles	FRONT-ZFL 1,5
Insulating material group	I
Rated surge voltage (II/2)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V
Nominal cross section	1.5 mm ²
Insulating material	PBT
Flammability rating according to UL 94	V0
Stripping length	11 mm
Number of positions	32

Socket strip - FRONT-ZFL 1,5/D32 - 2201632

Technical data

General

	32
--	----

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	1.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440490
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Socket strip - FRONT-ZFL 1,5/D32 - 2201632

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized		
	B	D
mm ² /AWG/kcmil	24-16	24-16
Nominal current I _N	4 A	4 A
Nominal voltage U _N	300 V	300 V

cUL Recognized		
	B	D
mm ² /AWG/kcmil	24-16	24-16
Nominal current I _N	4 A	4 A
Nominal voltage U _N	300 V	300 V

EAC


EAC

cULus Recognized		
------------------	--	--

Drawings

Socket strip - FRONT-ZFL 1,5/D32 - 2201632

Dimensional drawing

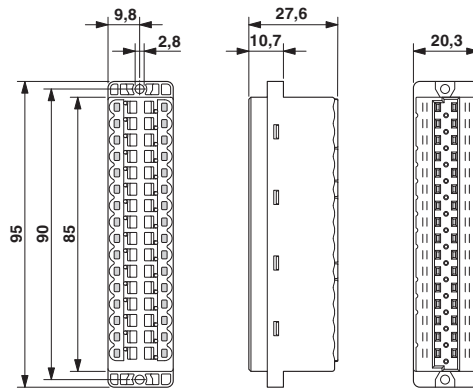

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2201632](#)