




Heyco® Nylon PCB Supports - Threaded Male

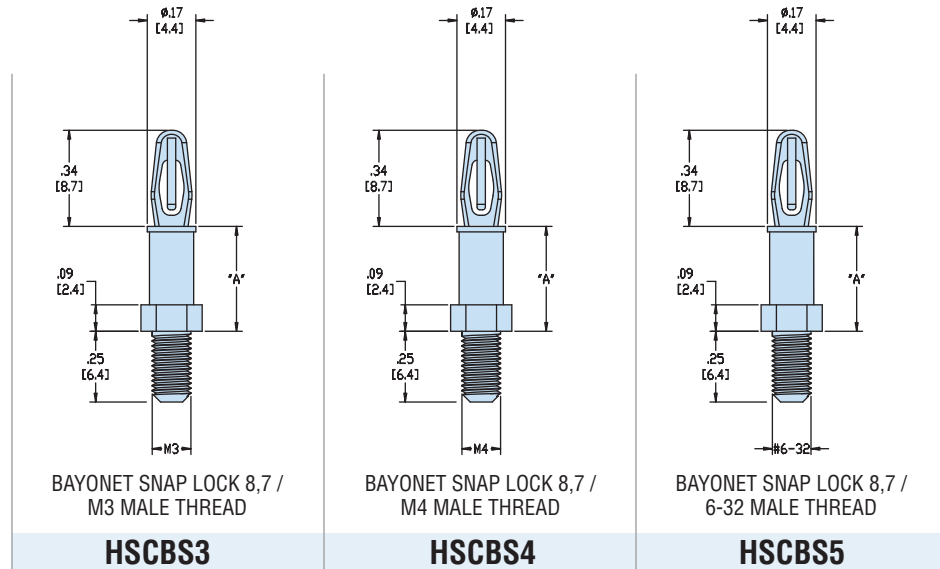

		Maximum Thickness †		Mounting Hole Diameter		Maximum Thickness †		Mounting Hole Diameter		Maximum Thickness †		Mounting Hole Diameter	
PCB		.062	1,6	.125	3,2	.062	1,6	.125	3,2	.062	1,6	.125	3,2
Chassis		.250	6,4		M3	.250	6,4		M4	.250	6,4	6-32	
A		PART NO.		DESCRIPTION		PART NO.		DESCRIPTION		PART NO.		DESCRIPTION	
in.	mm.	Natural				Natural				Natural			
.125	3,2	10716		HSCBS3-02		10726		HSCBS4-02		10736		HSCBS5-02	
.187	4,8	10717		HSCBS3-03		10727		HSCBS4-03		10737		HSCBS5-03	
.250	6,4	10718		HSCBS3-04		10728		HSCBS4-04		10738		HSCBS5-04	
.312	7,9	10719		HSCBS3-05		10729		HSCBS4-05		10739		HSCBS5-05	
.375	9,5	10720		HSCBS3-06		10730		HSCBS4-06		10740		HSCBS5-06	
.437	11,1	10721		HSCBS3-07		10731		HSCBS4-07		10741		HSCBS5-07	
.500	12,7	10722		HSCBS3-08		10732		HSCBS4-08		10742		HSCBS5-08	
.562	14,3	10723		HSCBS3-09		10733		HSCBS4-09		10743		HSCBS5-09	
.625	15,9	10724		HSCBS3-10		10734		HSCBS4-10		10744		HSCBS5-10	

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

† Indicates thread length for Chassis end of part.

Material: Nylon 6/6
Flammability Rating: 94V-2
Temperature Range: -40°F (-40°C) to 185°F (85°C)

*Quick
Specs*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[10727](#) [10741](#) [10721](#) [10730](#) [10717](#) [10726](#) [10742](#) [10736](#) [10737](#) [10732](#) [10728](#) [10719](#) [10740](#) [10744](#) [10733](#)
[10743](#) [10716](#) [10723](#) [10738](#) [10720](#) [10722](#) [10718](#) [10729](#) [10739](#) [10731](#) [10724](#) [10734](#)