

NOTES:


1. ROHS COMPLIANT
2. MATERIAL:
 - PANEL CONNECTOR - POLYPROPYLENE, UL RATING 94-HB
 - HEADER CONNECTOR - POLYESTER, UL RATING 94-V0
 - LENS - POLYCARBONATE - UL RATING 94-V2
 - MOISTURE SEAL - EPDM
 - RING - THERMOPLASTIC
 - TERMINALS - PHOSPHOR BRONZE, TIN PLATE
 - WIRE - 24 AWG 1007/1569
3. MOUNTING: HOLE SIZE .281" (7.2mm) OPENING ON 3/8" CENTERS (9.52mm)
4. PANEL THICKNESS: .030" (0.76mm) MIN TO .125" (3.18mm) MAX
 - FOR PANEL THICKNESS .030" (0.76mm) TO .045" (1.14mm) USE TWO (2) SPC 060 SPACERS
 - FOR PANEL THICKNESS .050" (1.27mm) TO .100" (2.54mm) USE ONE (1) SPC 060 SPACER
 - FOR PANEL THICKNESS .105" (2.67mm) TO .125" (3.18mm) NO SPACER REQUIRED
5. LED LEAD LENGTH:
 - FOR CMC 285 - .350" $\pm$.010 (8.89mm $\pm$ 0.25)
 - FOR CMC 313, CMC 321, CMC 323, AND CMS 322 - .220" $\pm$.010 (5.59mm $\pm$ 0.25)
6. FOR STANDARD DRY APPLICATIONS USE CMC 285, CMC 313, CMC 321 OR CMC 323; FOR WET OR DRY APPLICATIONS USE CMS 322 (MEETS NEMA4/ IP56)
7. ALSO CAN BE ORDERED CNX 310 XXX FOR CONNECTOR AND RESISTOR ONLY
8. U.S AND FOREIGN PATENT ISSUED

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR 111009A201	2/22/11	KH

CABLE ORDERING CODE EXAMPLE:
CNX 310 056 E 4 1 08

* CALL FACTORY FOR
ADDITIONAL OPTIONS

LED & SPACER
(ORDER SEPERATELY)



5MM LED



SPC 060

RESISTOR *	
000 =	NO RESISTOR
012 =	120 OHMS
018 =	180 OHMS
033 =	330 OHMS
056 =	560 OHMS
120 =	1200 OHMS
220 =	2200 OHMS


TERMINATION *	
X =	STRIPPED END
E =	SINGLE ROW LOCKING HEADER
G =	SINGLE ROW PLAIN HEADER

WIRE SIZE *	
4 =	24 AWG


WIRE COLOR *	
1 =	WHITE - BLACK
2 =	RED - BLACK

WIRE LENGTH *	
04 =	4 INCHES (101.6mm)
06 =	6 INCHES (152.4mm)
08 =	8 INCHES (203.2mm)
12 =	12 INCHES (304.8mm)
18 =	18 INCHES (457.2mm)
24 =	24 INCHES (609.6mm)

LENS
(ORDER SEPERATELY)




CMC 285



CMC 313
CMC 321
CMC 323



CMS 322

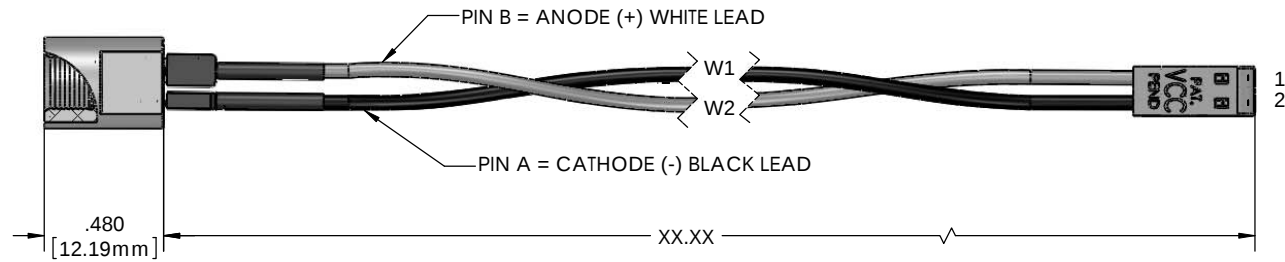

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED		MATERIAL		VCC OPTOELECTRONICS 190 BOSSTICK BLVD, SUITE 101 SAN MARCOS, CA 92069 U.S.A. PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vcclite.com				
INCHES ±.500 MM ±12.7		SEE NOTES		TITLE: CNX 310 XXX CABLE ASSEMBLY				
		FINISH						
THIRD ANGLE PROJECTION		SEE NOTES						
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. IS PROHIBITED.		APPROVAL		DATE		SIZE	DWG. NO.	REV
		DRAWN K.Howard		2/22/11		B	CNX 310 XXX ASSY	001
		CHECKED AZ		2/22/11				
		DO NOT SCALE DRAWING		SCALE: 2:1		SHEET 1 OF 1		

SIZE	DWG. NO.	REV
B	CNX 310 XXX ASSY	001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[CNX_310_000](#) [CNX_310_000_X_4_1_04](#) [CNX_310_012_E_4_1_06](#) [CNX_310_012_E_4_1_12](#)
[CNX_310_012_E_4_1_24](#) [CNX_310_012_X_4_1_04](#) [CNX_310_220_X_4_1_18](#) [CNX_310_220_X_4_1_24](#)
[CNX_310_220_E_4_1_04](#) [CNX_310_220_E_4_1_06](#) [CNX_310_220_E_4_1_08](#) [CNX_310_220_E_4_1_12](#)
[CNX_310_220_X_4_1_04](#) [CNX_310_220_X_4_1_08](#) [CNX_310_120](#) [CNX_310_120_X_2_1_24](#)
[CNX_310_120_X_4_1_06](#) [CNX_310_120_X_4_1_12](#) [CNX_310_120_X_4_1_24](#) [CNX_310_220](#)
[CNX_310_033_X_4_1_06](#) [CNX_310_033_X_4_1_24](#) [CNX_310_056](#) [CNX_310_056_E_4_1_08](#)
[CNX_310_056_E_4_1_18](#) [CNX_310_056_X_4_1_12](#) [CNX_310_012_X_4_1_08](#) [CNX_310_012_X_4_1_18](#)
[CNX_310_012_X_4_1_24](#) [CNX_310_018](#) [CNX_310_018_E_4_1_12](#) [CNX_310_033](#)