



 1. RECOMMENDED SPARE PARTS.

2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

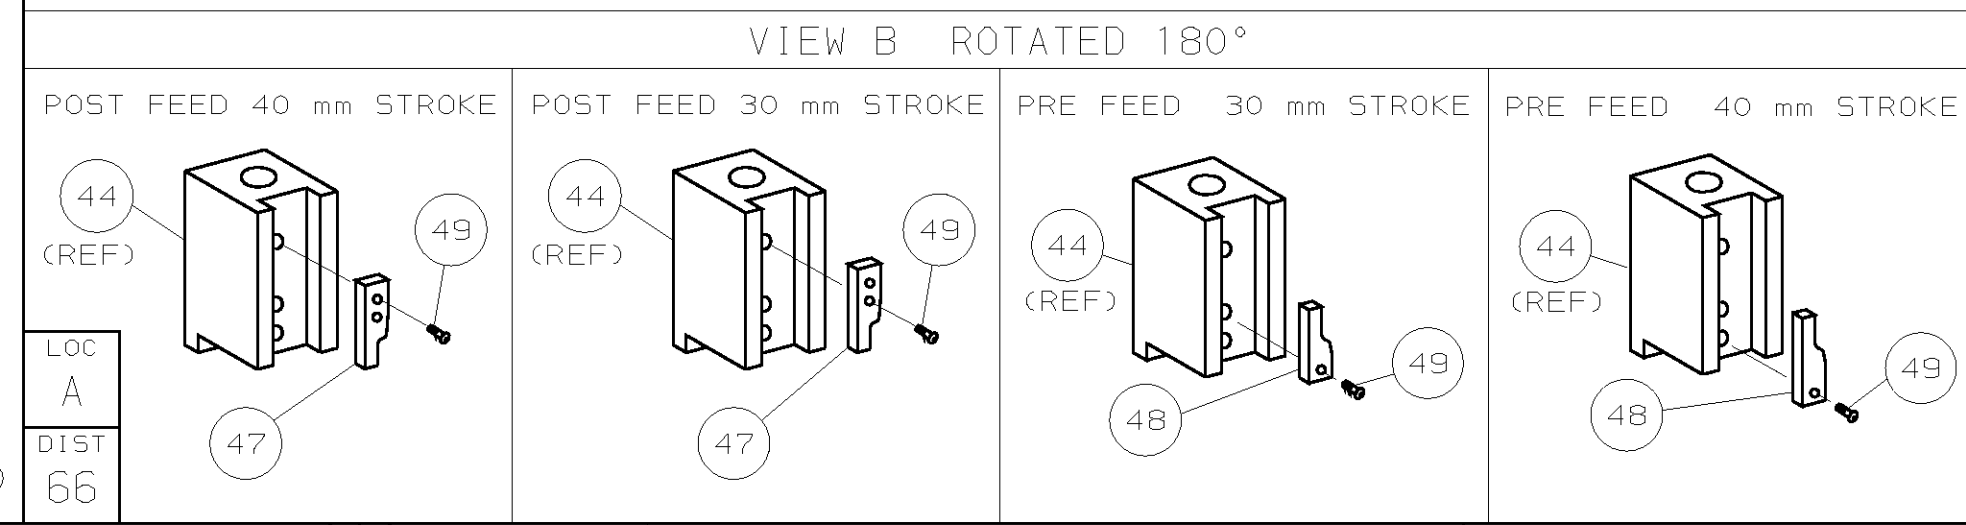

ON INSTALLATION, SET WIRE
DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS
BELOW MIN REQUIRED CRIMP
HEIGHT SETTING WILL CAUSE
DAMAGE TO CRIMP TOOLING.

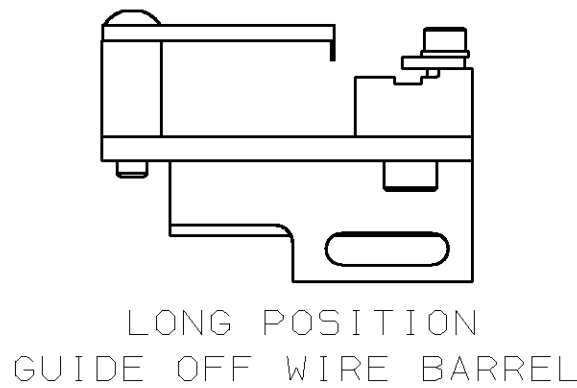

QTY READ PER ASSY				PARTS LIST						
		DIMENSIONS: mm [INCHES] DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC DEC ± 2 PLC DEC ± 3 PLC DEC ± ANGLES ± SURF TEXTURE: ✓	MATL	—	HT TR	—	FIN	—		
			DR	26JUL04	APP	26JUL04	 Tyco Electronics Harrisburg, PA 17105-3608			
			L.L.LOFTHOUSE	F.BACKHURST						
			CHK	—	REL	10SEP04				
					L.L.LOFTHOUSE					
			NAME	FINE ADJ SIDE FD HD-I APPL				MACHINE REF HD-I APPL		
LJL APP	SEP04 DATE	REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX	SCALE	—	D	DWG NO	1528442	SHEET 1 of 1	REV A	
CAGE CODE 00779			CUSTOMER AND ASSEMBLY DRAWING						RESTRICTED TO —	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1528442-6](#)