
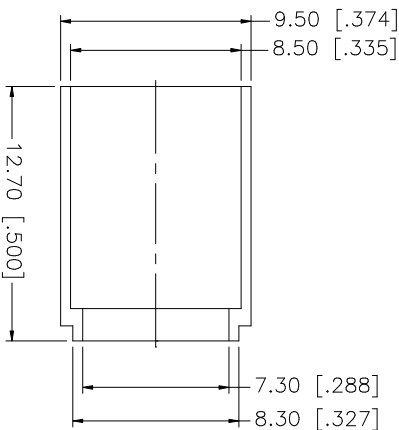
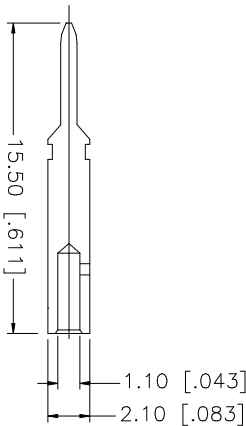
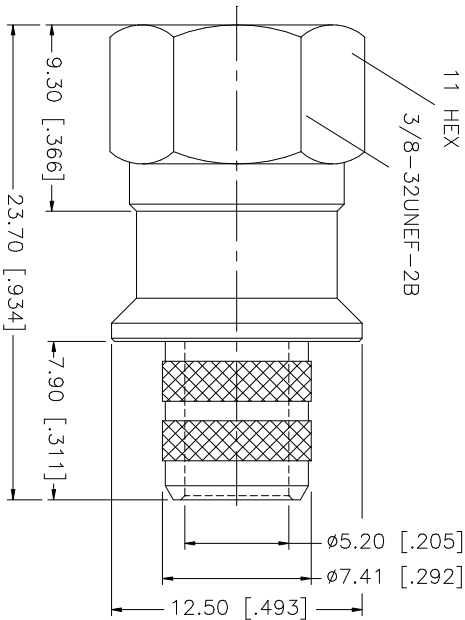


REV.	DATE	DESCRIPTION
NC	04/14/04	INITIAL RELEASE

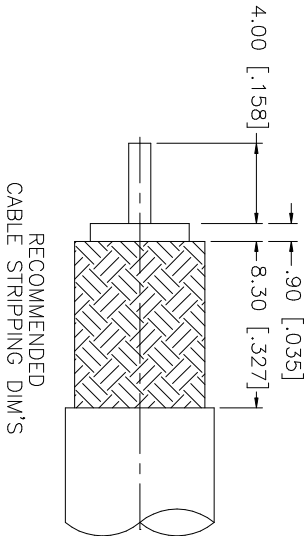

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex F CRIMP PLUG (FOR BELDEN 1694A CABLE) 222194
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	
6					0.5 - 8mm ± 0.20mm	CHECKED		
5					8 - 30mm ± 0.40mm	ISSUED		
4	FERRULE	BRASS	NICKEL	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	PART NO.		
2	INSULATOR	DELFIN	NATURAL	1	.020 - .315 = ± 0.007"	DWG. NO.		
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015"	REV		
	DESCRIPTION	MATERIAL	FINISH	QTY	1.180 - 4.724 = ± 0.020"	SIZE		
					DO NOT SCALE DRAWING	SCALE		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[222194](#)