

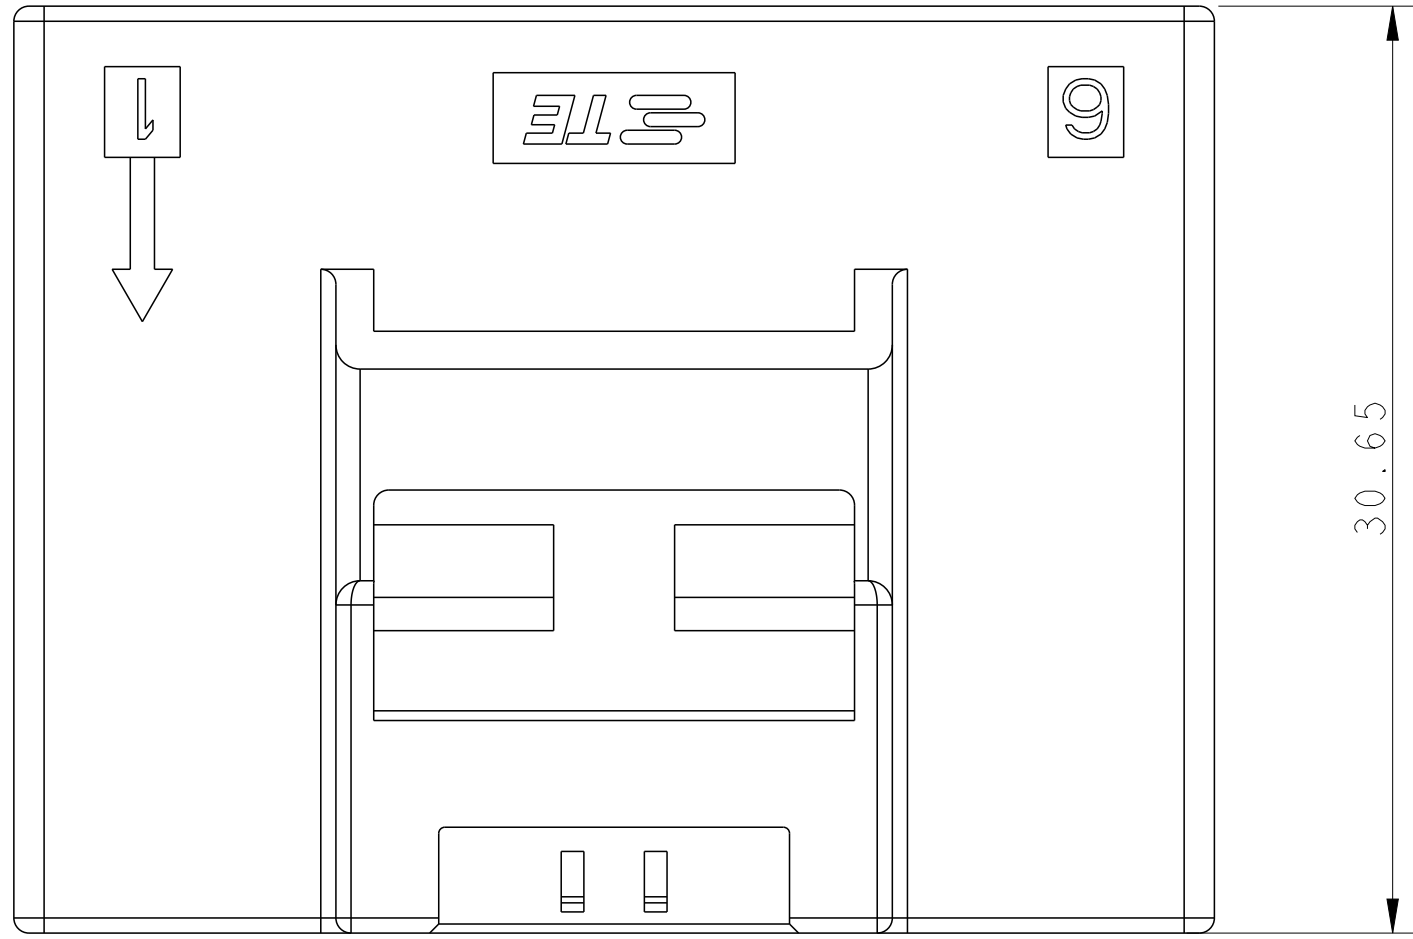
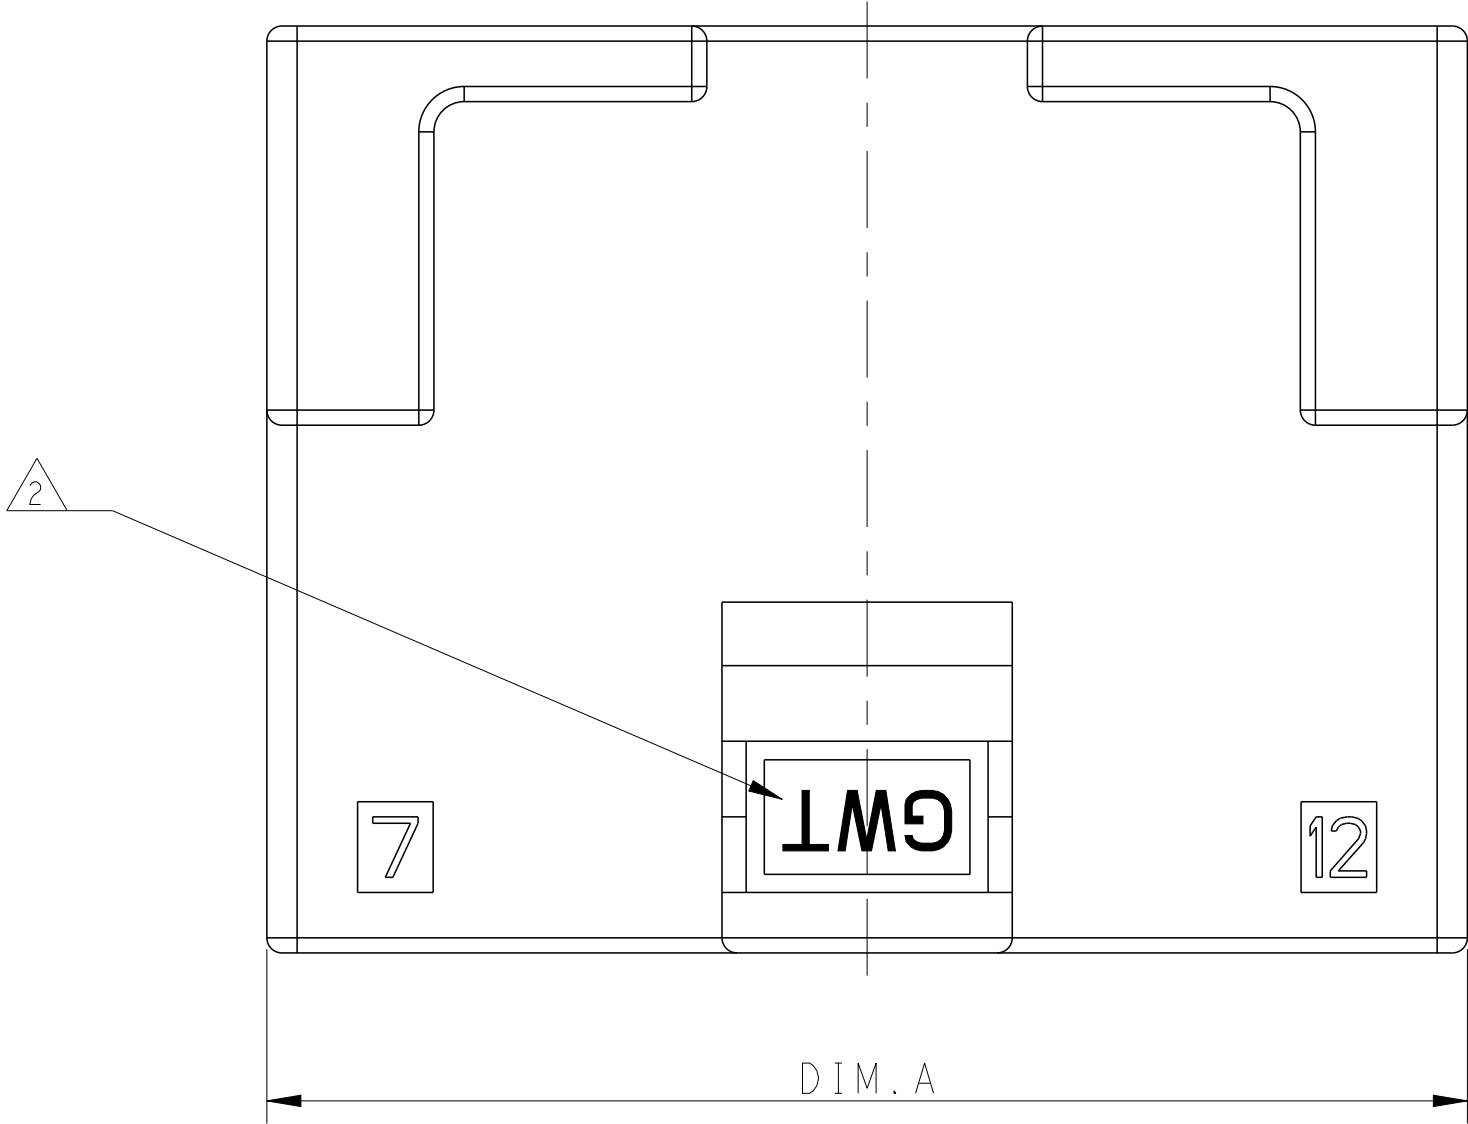
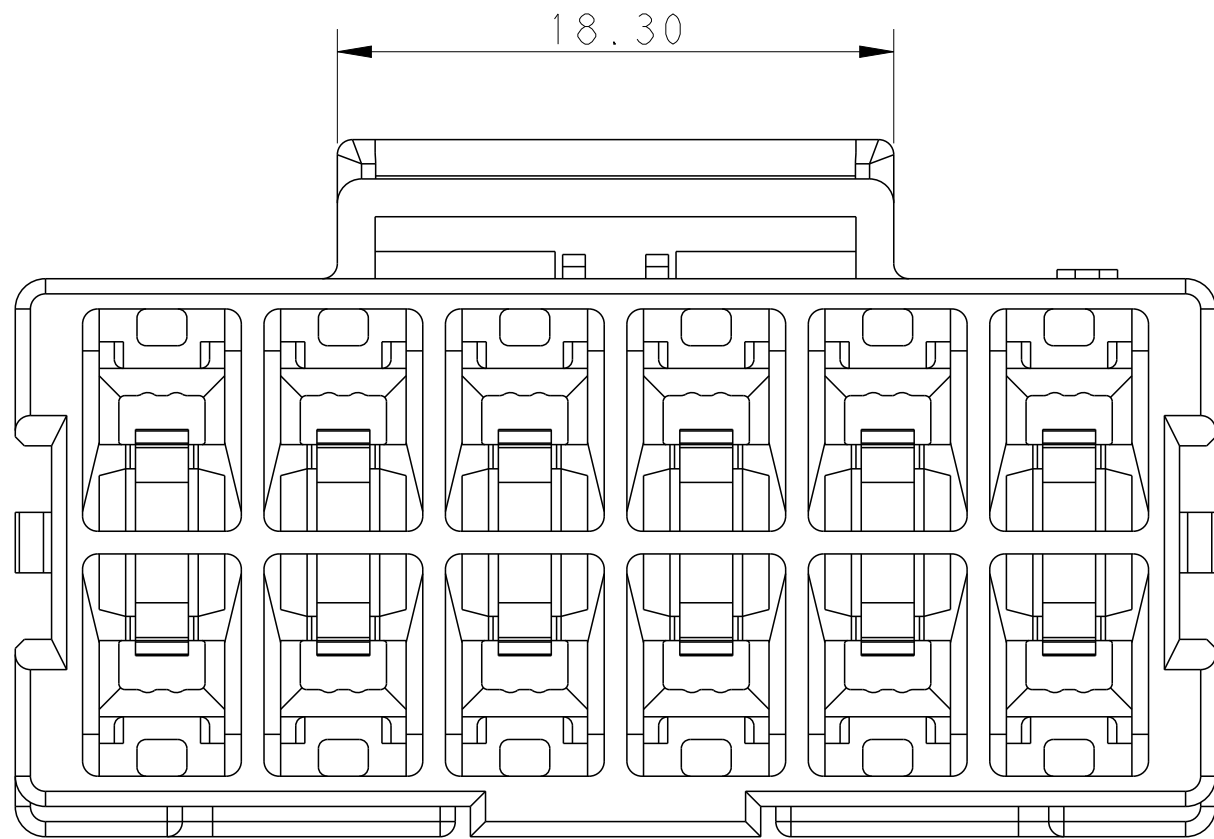


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		B			18JUL2016	BW	GJ	

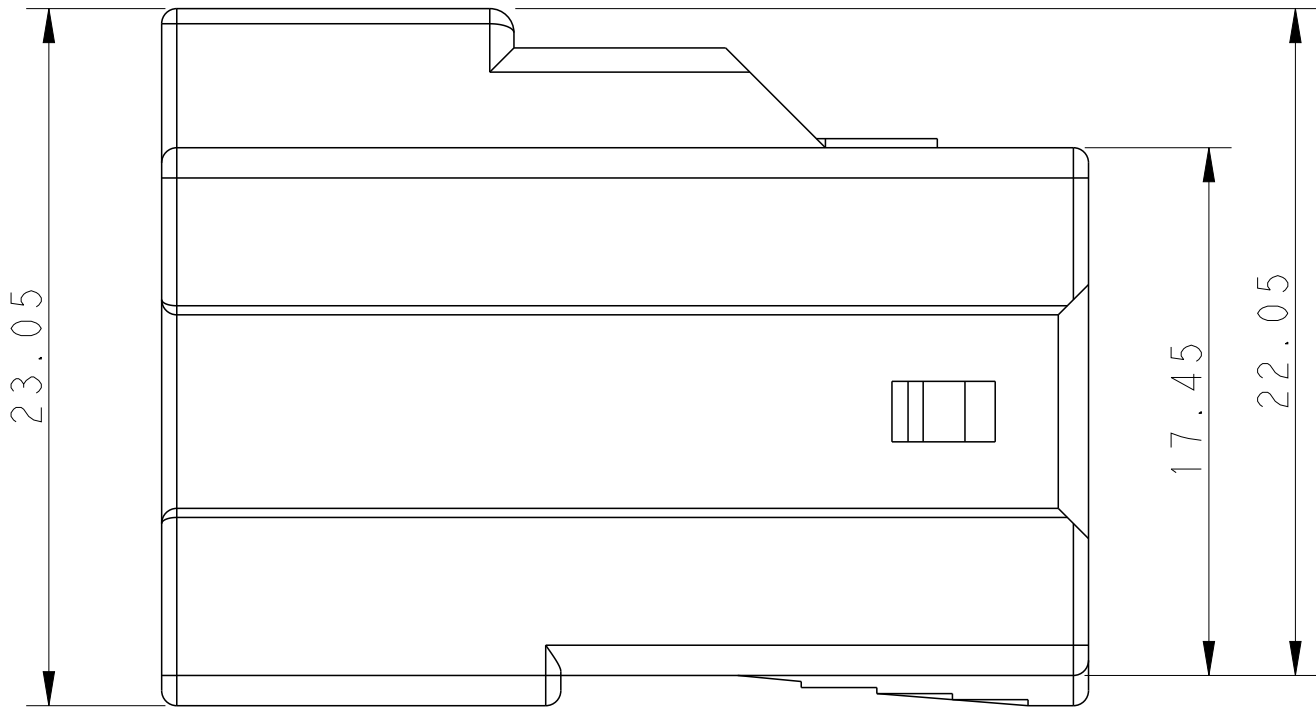

POS.	DIM.A	DIM.B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

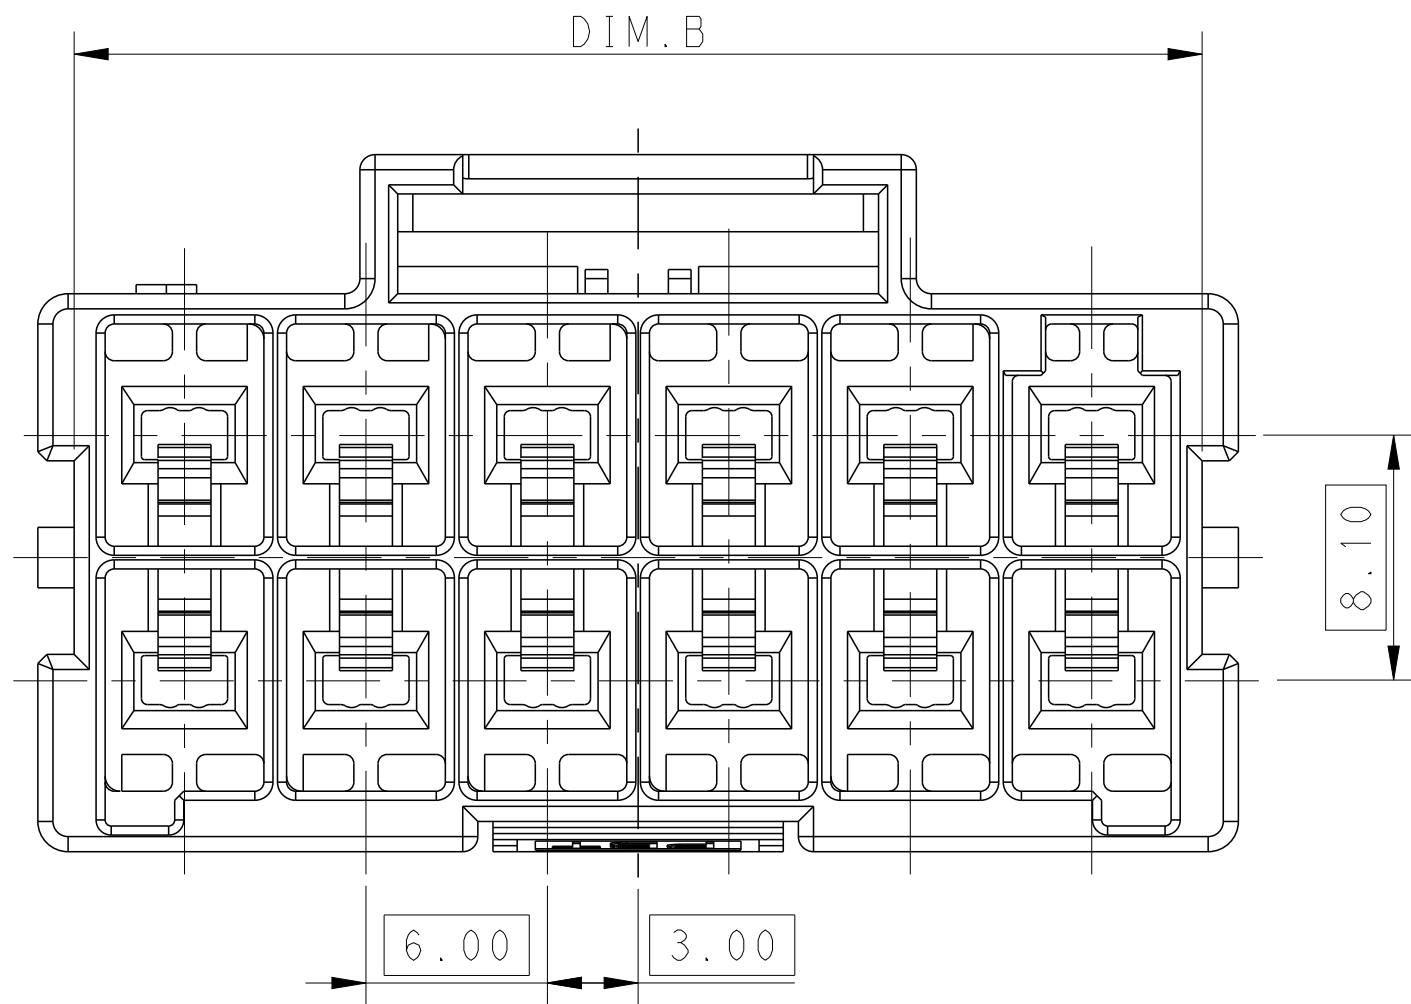

NOTE

1. MATERIAL:
LEVEL A: PA6 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0




2. MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*


4. MATING CONN, P/N
PLUG HSG: *-2232266-
TPA (LOCK PLATE): *-1971778-*

5. This product has not completed validation testing.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	26MAR2013	TE Connectivity			
		CHK	HAPYE WU	26MAR2013				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	YUHONG MAO	26MAR2013	NAME	
mm		0 PLC ± -		PRODUCT SPEC		108-106118	CAP HOUSING, FREE HANGING, DOUBLE ROW	
		1 PLC ±0.35		APPLICATION SPEC		114-106118	POWER TRIPLE LOCK	
		2 PLC ±0.25						
		3 PLC ± -						
		4 PLC ± -						
		ANGLES ± -						
		FINISH -						
MATERIAL		-		WEIGHT		-	RESTRICTED TO	
-		-		Customer Drawing		-	-	
				SCALE		-	SHEET	
						1	OF	
						2	REV	
						B		

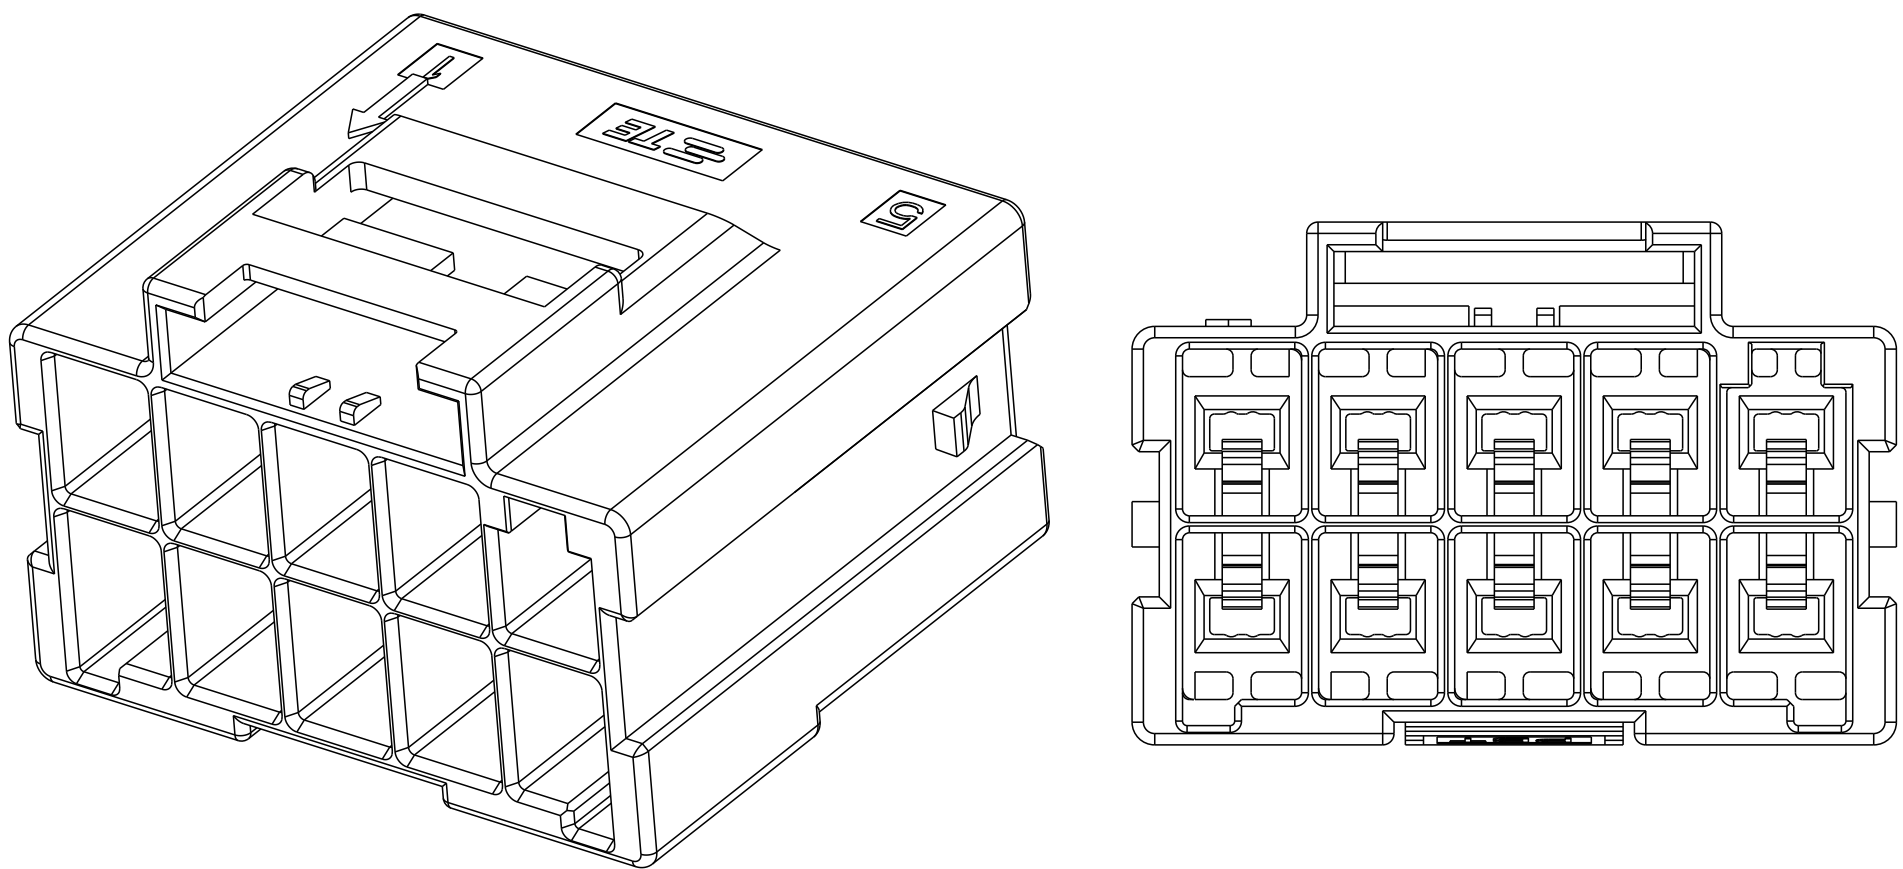





2*5 POSITIONS

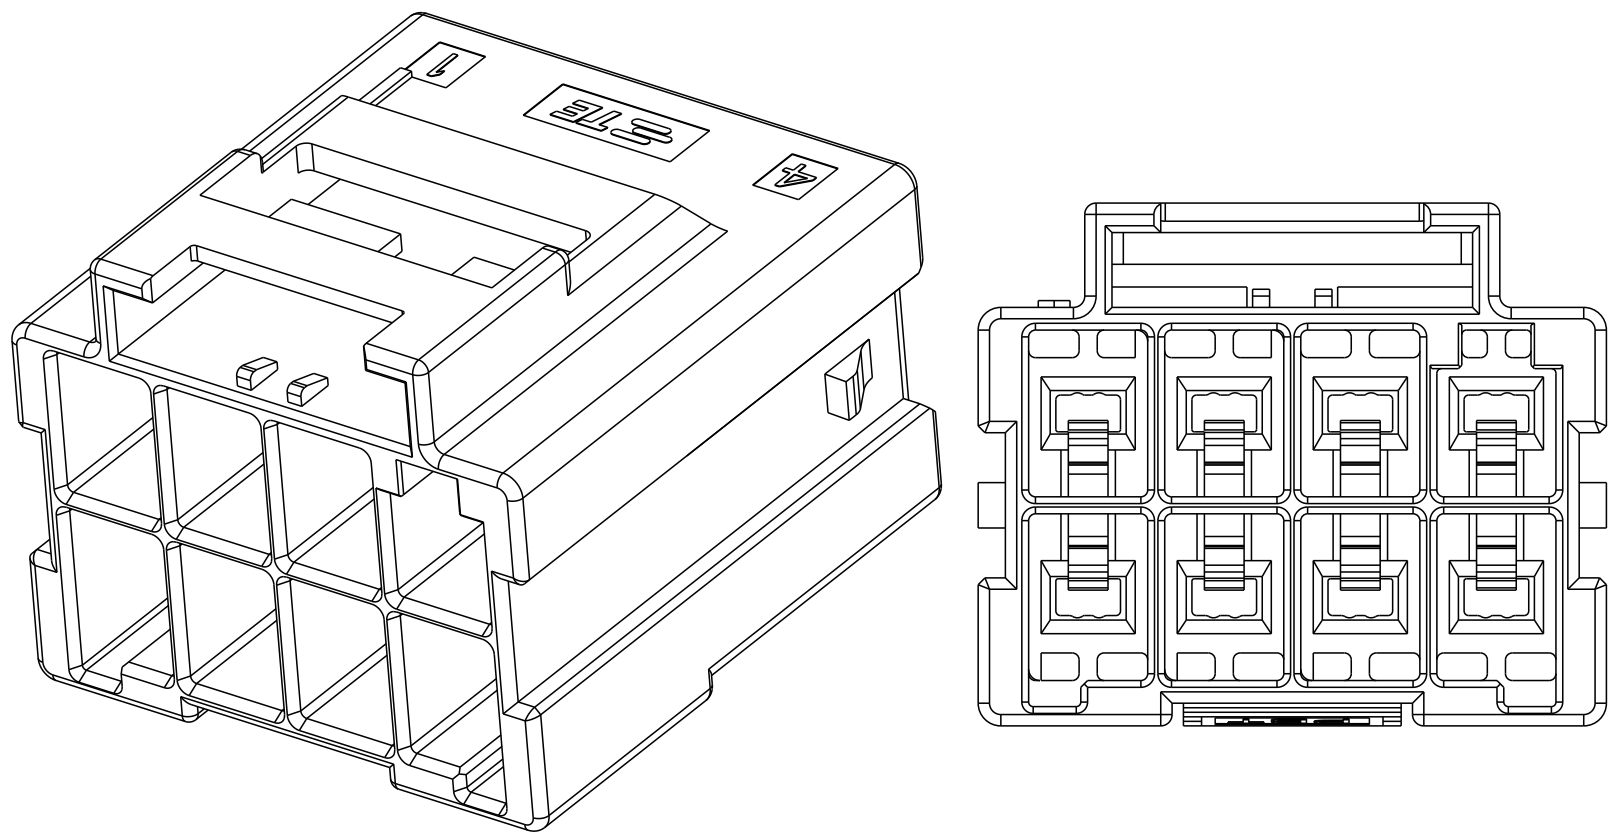


2*4 POSITIONS

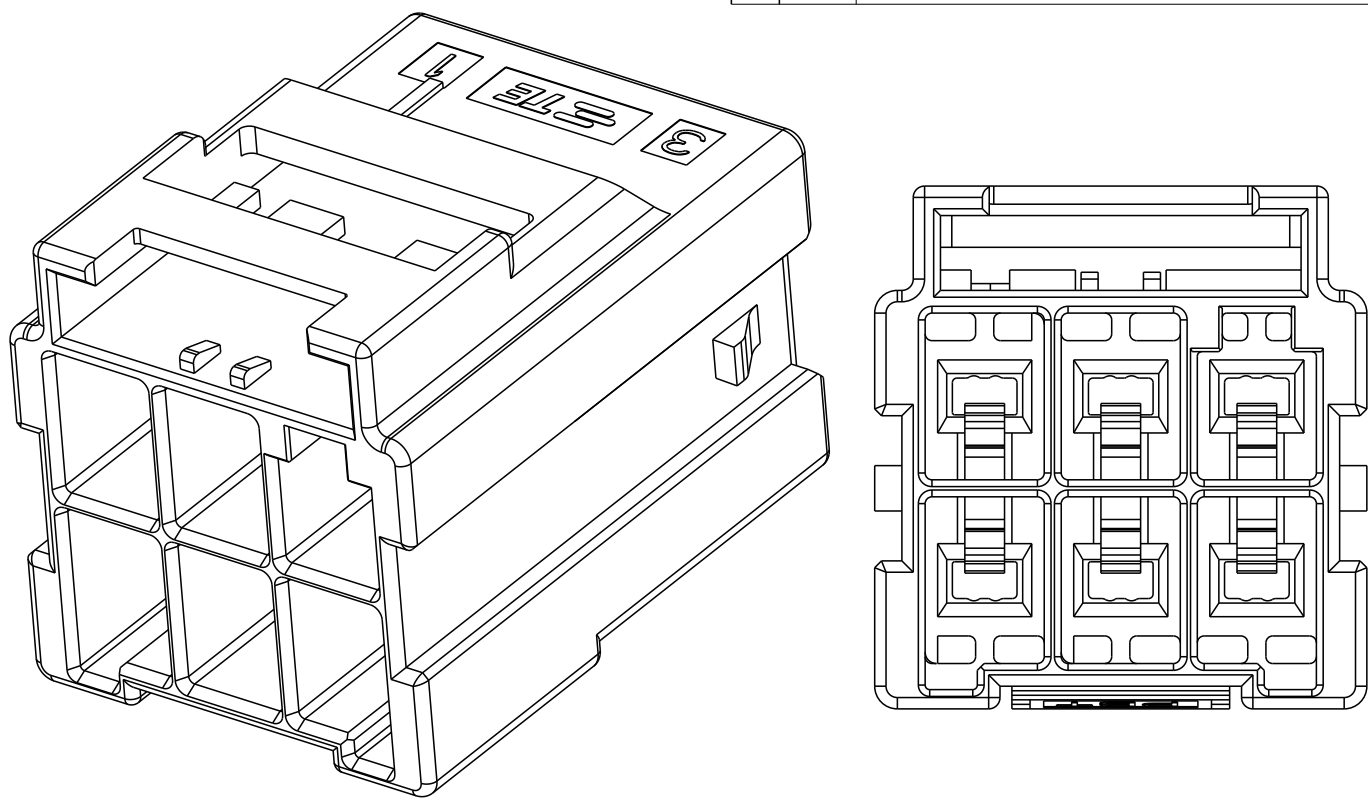

2*3 POSITIONS

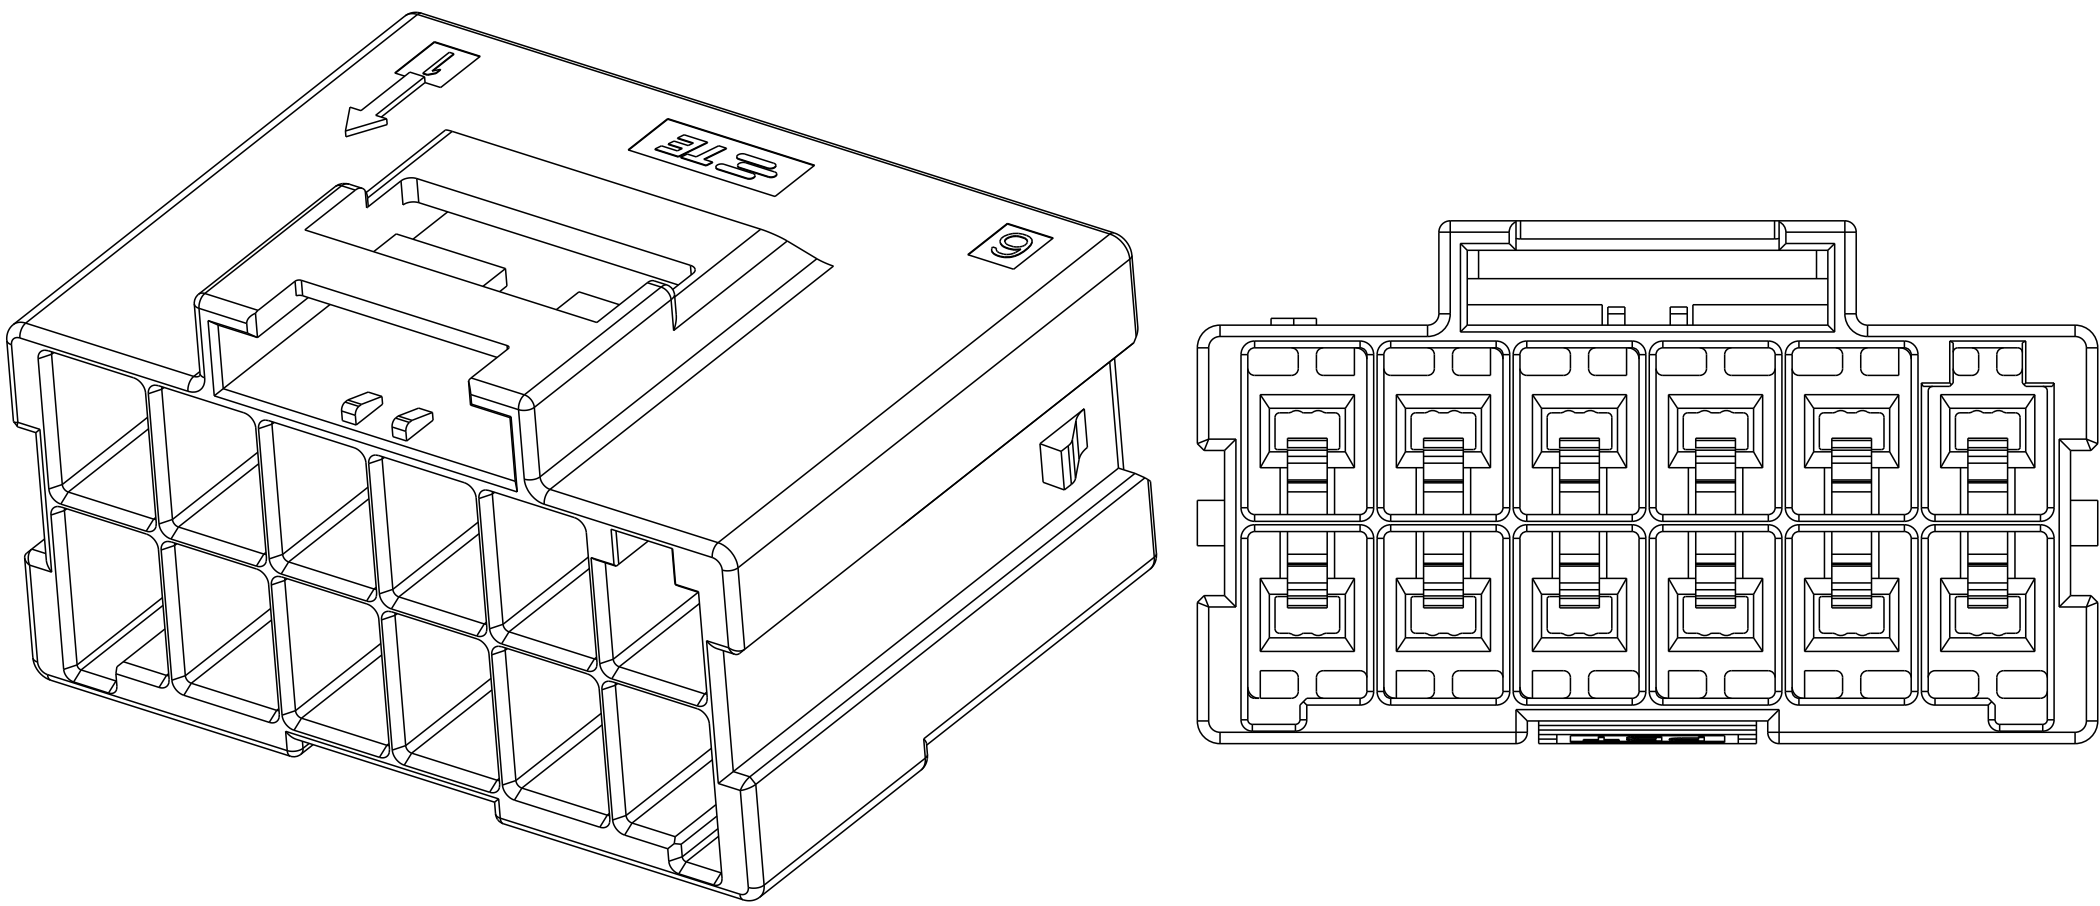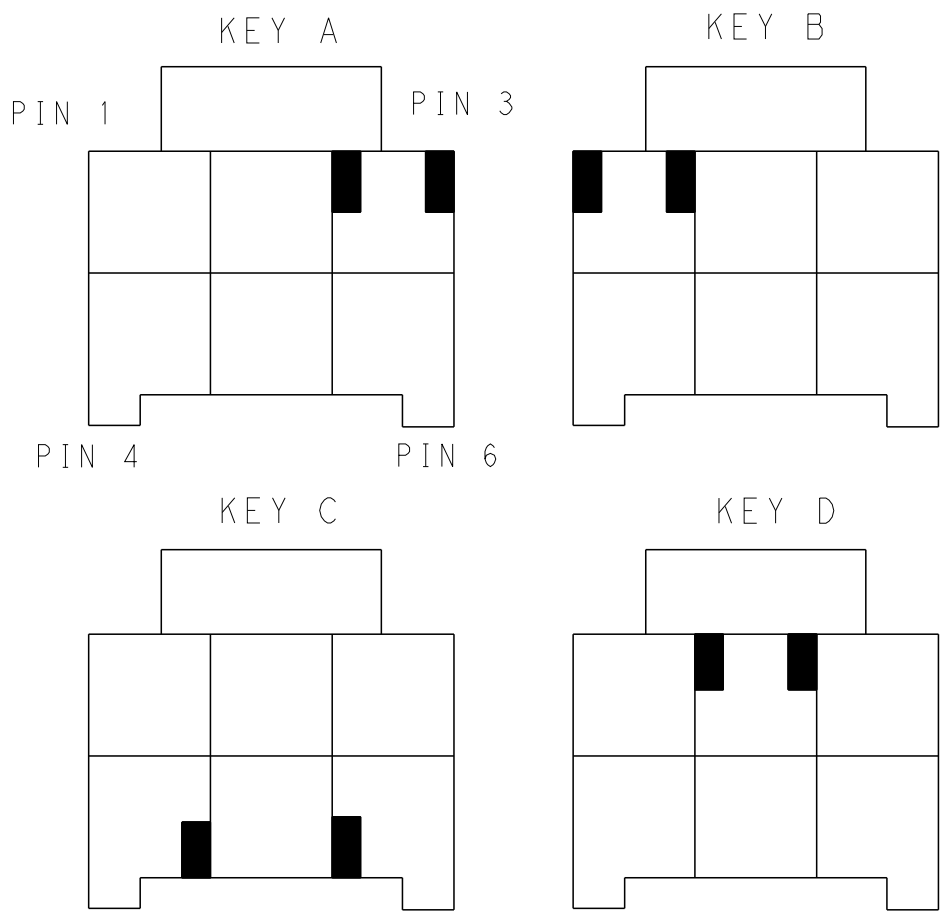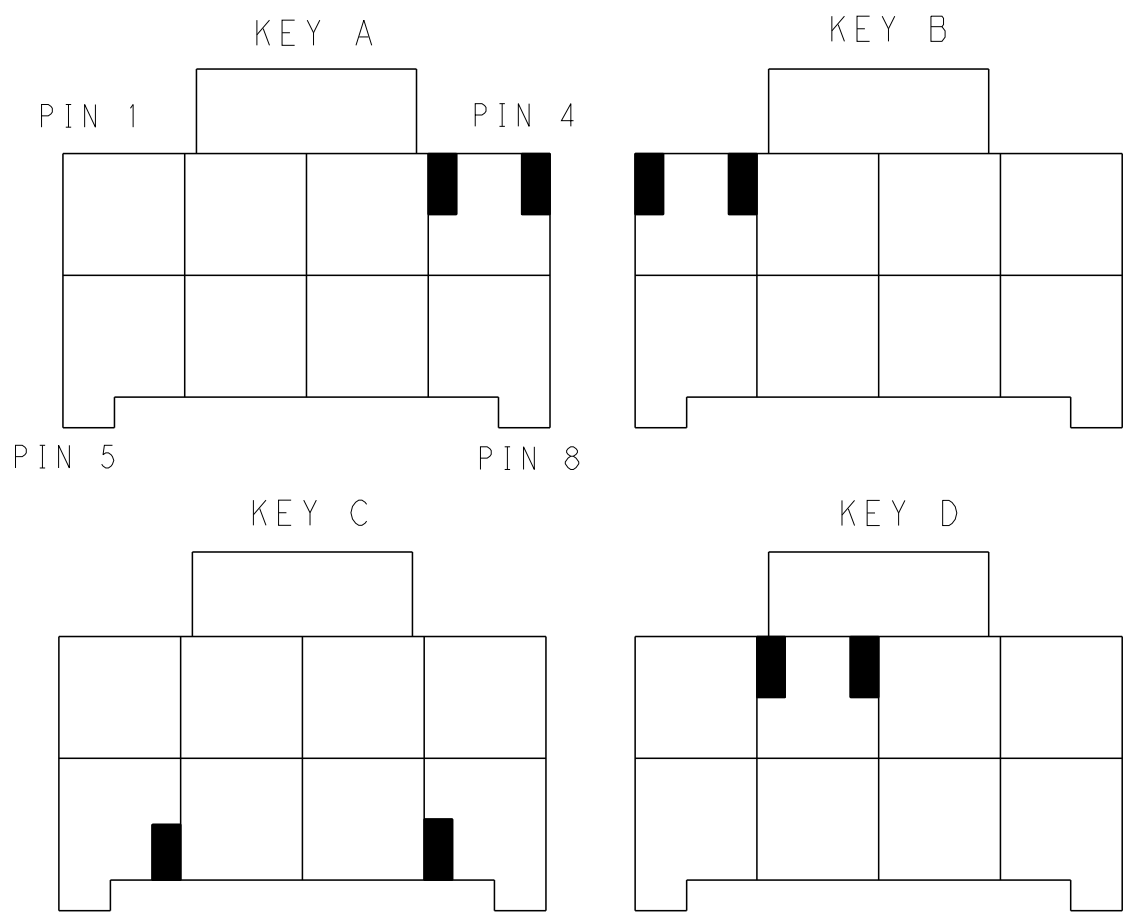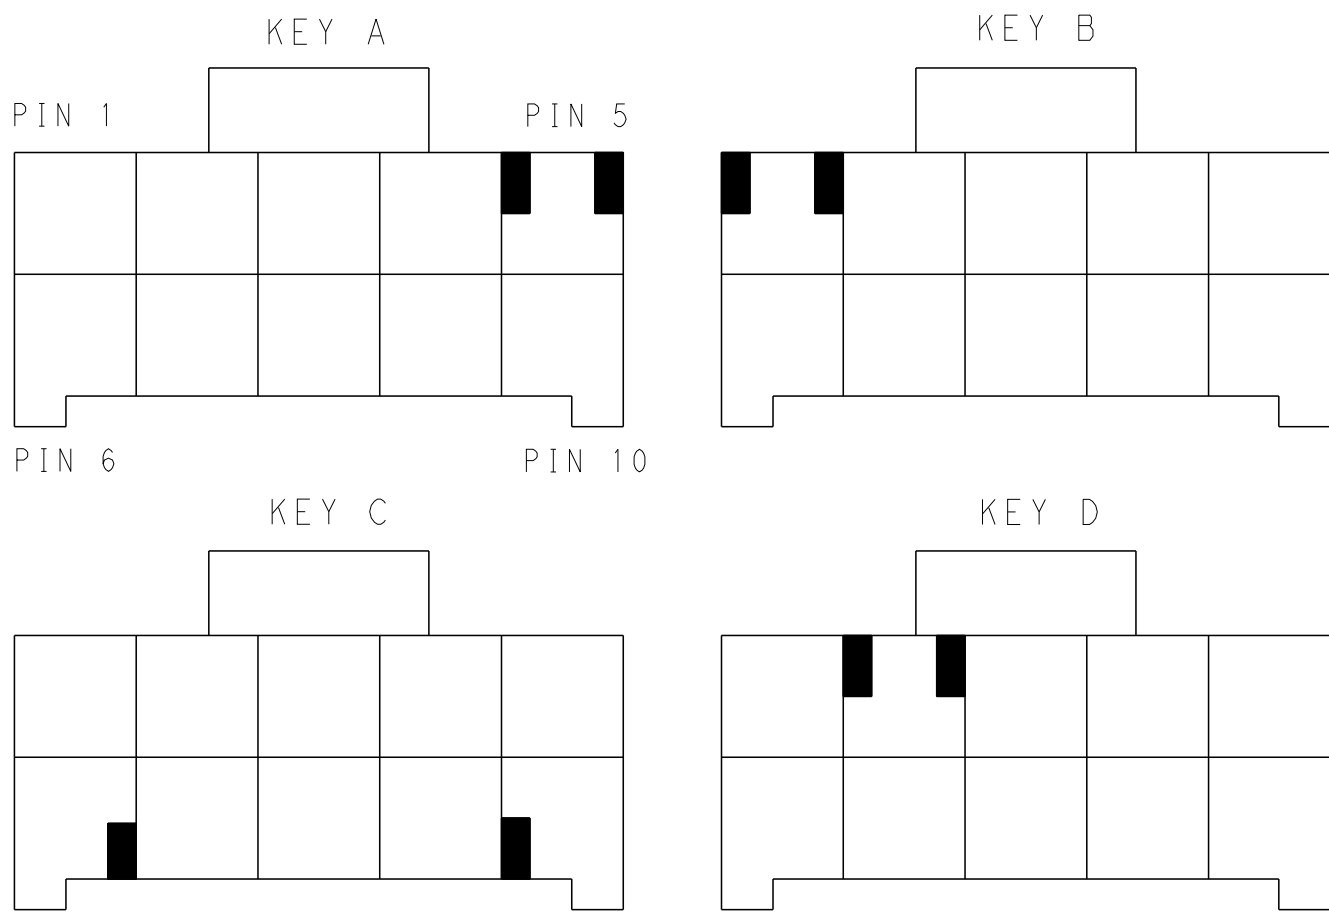

2*6 POSITIONS

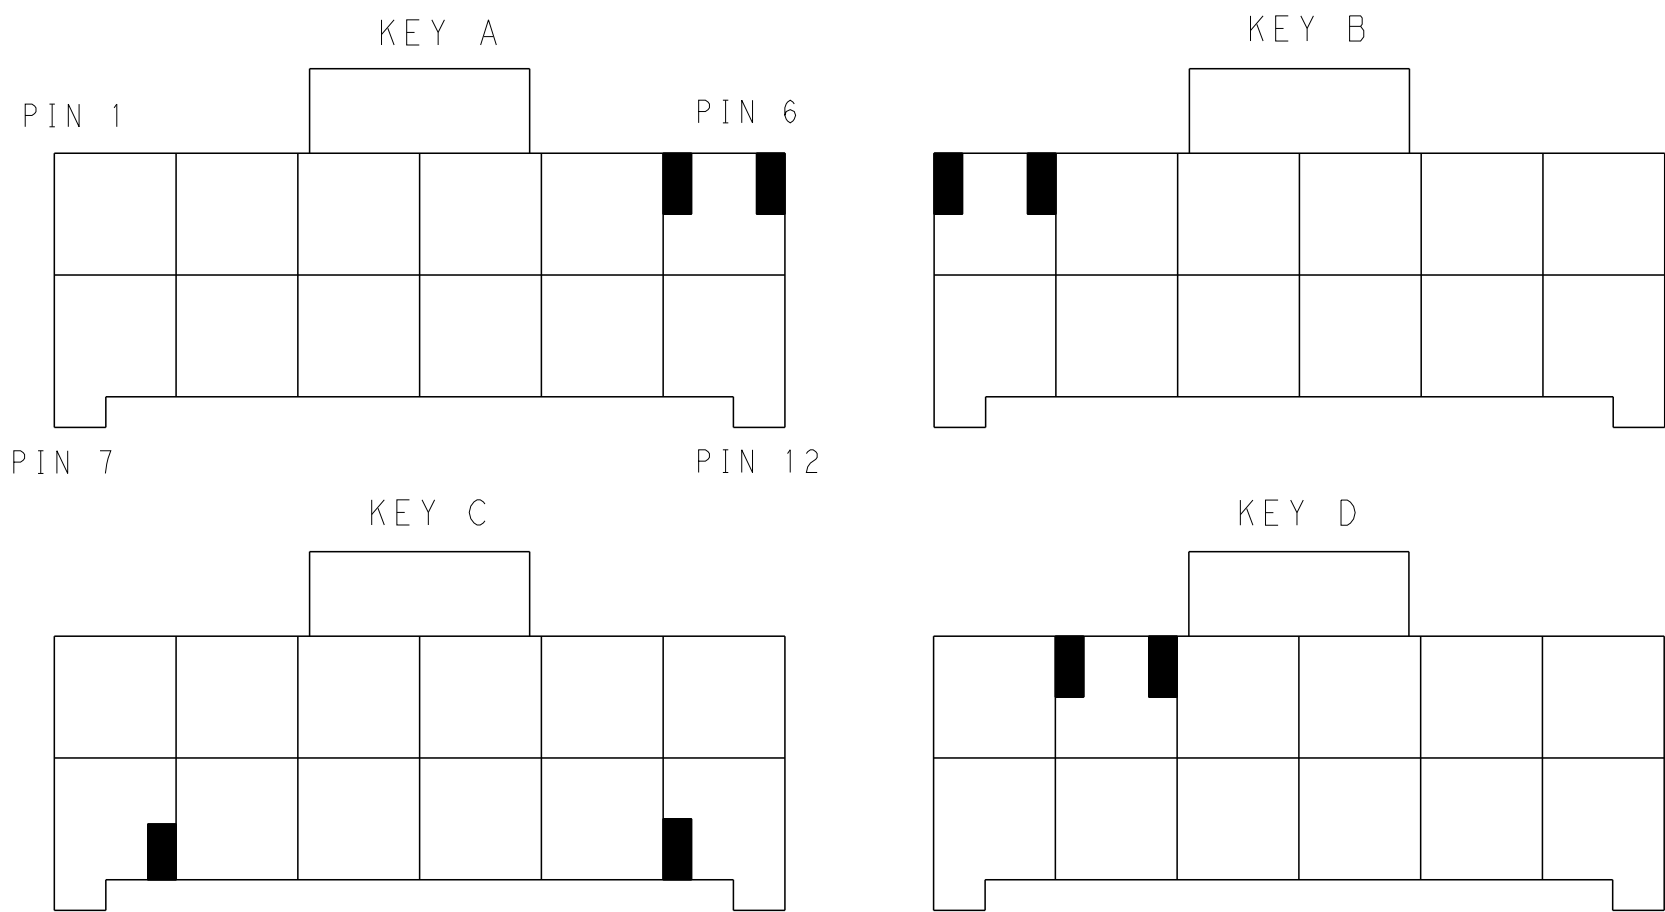

2*4	LEVEL A	DARK GREY	KEY A	5-2232359-4	2*6	LEVEL A	DARK GREY	KEY A	5-2232359-6
		BROWN	KEY B	6-2232359-4			BROWN	KEY B	6-2232359-6
		GREEN	KEY C	7-2232359-4			GREEN	KEY C	7-2232359-6
		ORANGE	KEY D	8-2232359-4			ORANGE	KEY D	8-2232359-6
2*3	LEVEL A	DARK GREY	KEY A	5-2232359-3	2*5	LEVEL A	DARK GREY	KEY A	5-2232359-5
		BROWN	KEY B	6-2232359-3			BROWN	KEY B	6-2232359-5
		GREEN	KEY C	7-2232359-3			GREEN	KEY C	7-2232359-5
		ORANGE	KEY D	8-2232359-3			ORANGE	KEY D	8-2232359-5
POS.	MATERIAL	COLOR	KEY	P/N	POS.	MATERIAL	COLOR	KEY	P/N
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN: TOMMY WU 26MAR2013	TE Connectivity CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK				
DIMENSIONS:				CHK: HAPYE WU 26MAR2013					
mm				APVD: YUZHONG MAO 26MAR2013	NAME		SIZE		
0 PLC ±- 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH ±-				PRODUCT SPEC	CAGE CODE		DRAWING NO		RESTRICTED TO
MATERIAL				APPLICATION SPEC	A100779		C=2232359		-
Customer Drawing				WEIGHT	SCALE		SHEET 2 OF 2		REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232359-4](#)