
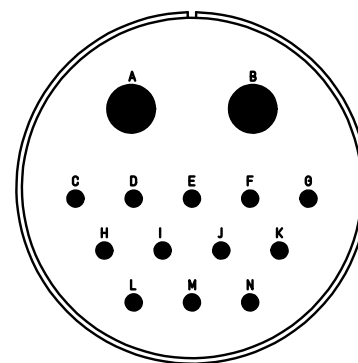
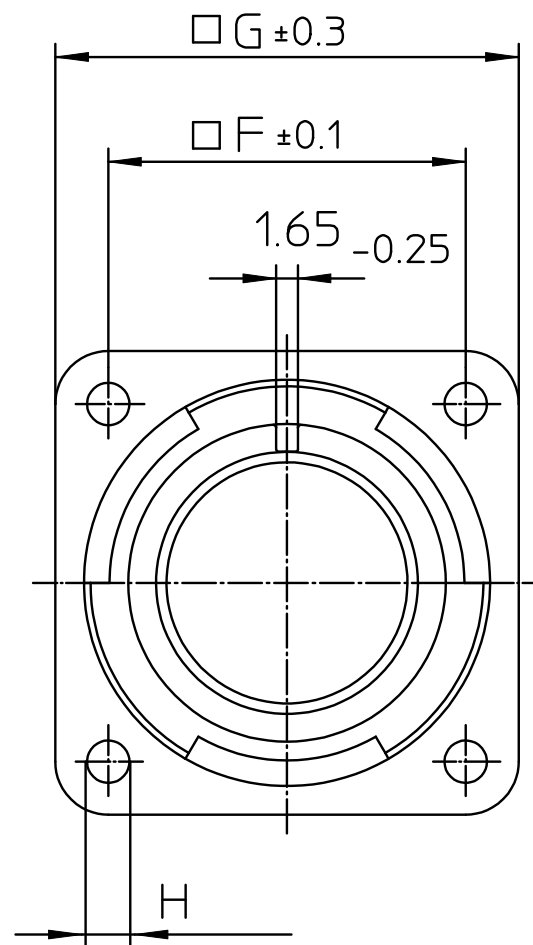


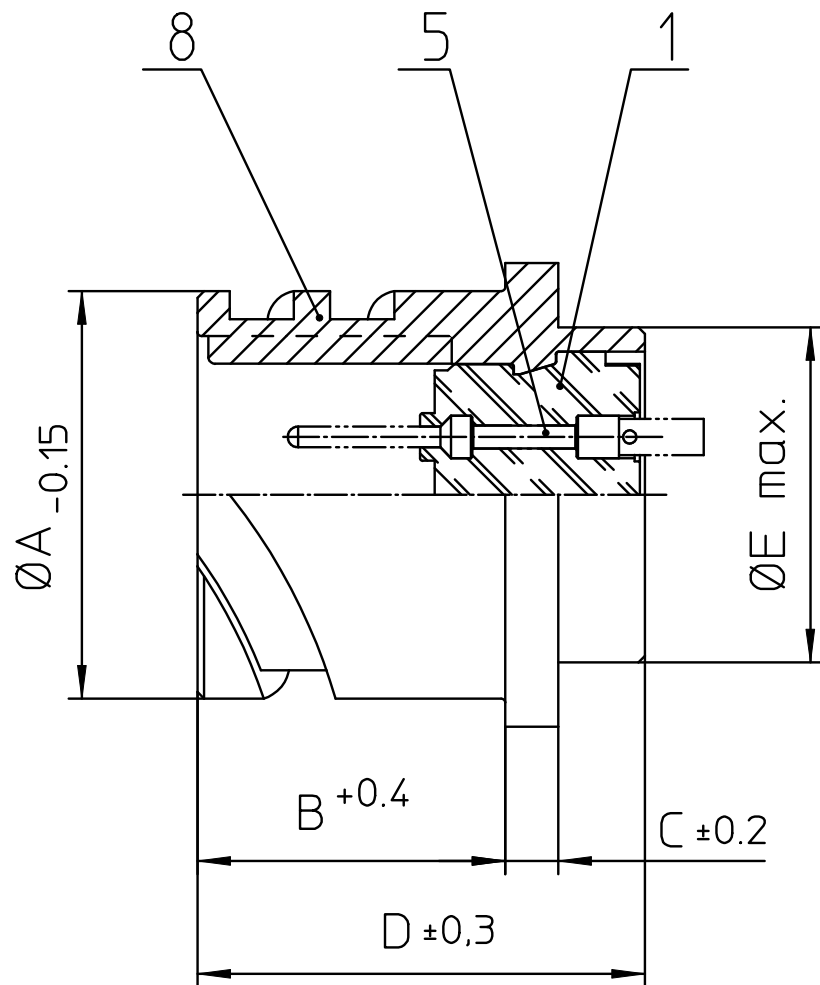

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B   | 22.2              |
| C   | 4                 |
| D   | 33.8              |
| E   | 47.8              |
| F   | 44.5              |
| G   | 57                |
| H   | 4.3               |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 8   | DOSENGEHÄUSE / SHELL                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| Material Specification:                                      |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Hard silver                                 |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
 CUSTOMER



description CA3102E32-9P-B-F80-F0  
 Box mounting receptacle

AWG Crimp / Pin / Layout: 32-9

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon



page 1/1  
 revision 1983 24. Nov 20