


Product Specification

10Gbps 850nm VCSEL, LC and SC TOSA Package

HFE6x92-761

PRODUCT FEATURES

- High performance VCSEL
- Low electrical parasitic TO package with flexible interface
- Data rates from DC to 12.5Gbps
- Complete isolation between the VCSEL, Monitor Photodiode and Case
- Mechanically compatible with all 10Gbps MSAs

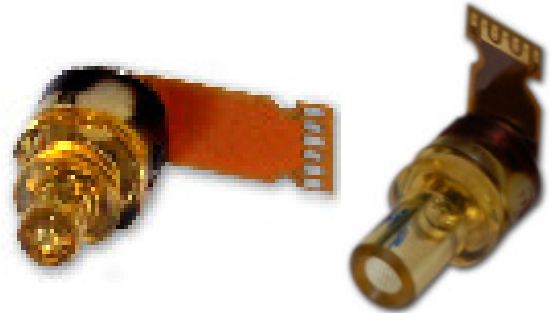

The HFE6x92-761 uses a high-performance Vertical Cavity Surface Emitting Laser (VCSEL) designed to meet performance requirements for 10Gbps data communication over multimode optical fiber. Applications include Ethernet, Fibre Channel and ATM protocols. The optical assembly is designed to inter-face either 50 μ m or 62.5 μ m multimode fiber and ensure launch conditioning requirements compatibility with enhanced bandwidth fiber as specified by TIA 455-203.


The HFE6x92-761 incorporates a power monitoring photodiode that can be used for temperature compensation, average power control, and for compliance with Class 1 eye safety limits.

PRODUCT SELECTION

Part Number	Description
HFE6192-761	Differentially Driven, attenuated, LC TOSA, with 50 Ω flex
HFE6392-761	Differentially Driven, attenuated, SC TOSA, with 50 Ω flex

I. Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to +85°C
Case Operating Temperature	0* to +85°C
Lead Solder Temperature	260°C, 10 sec.
Reverse Power Supply Voltage	5V
Max continuous forward current	12mA
ESD Exposure (Human Body Model)	150V ¹

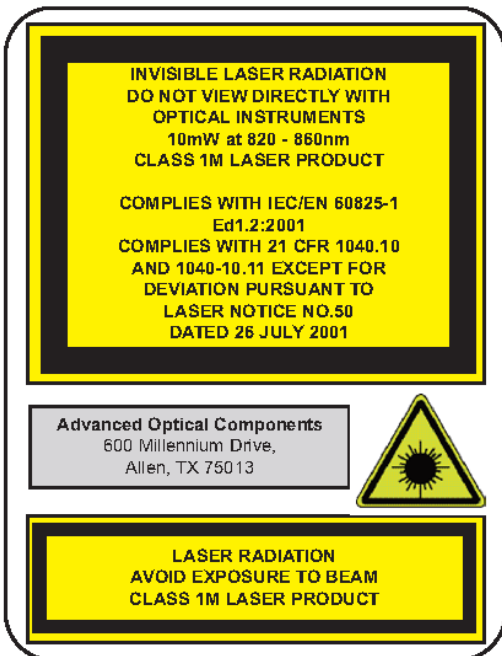

Notice

Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

Notice

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

II. Electro-Optical Characteristics ($T_A=25^{\circ}\text{C}$, unless otherwise stated)


VCSEL Parameters	Test Condition	Symbol	Min.	Typ.	Max.	Units	Notes
Fiber coupled optical power	$I_F = 6.5\text{mA}$ peak	P_{OC}	400	600		μW	
Coupling Efficiency	50/125 μm fiber	PO_PCT	70			%	1
Threshold Current	$I_F = 6.5\text{mA}$	I_{TH}		1	2	mA	
Threshold Current Temperature Variation		ΔI_{TH}			1	mA	2
Slope Efficiency	$T_A=0$ to 70°C	η	0.06	0.075	0.2	mW/mA	3
Slope Efficiency Temperature Variation	$P_{OC}=0.6\text{mW}$	$\Delta\eta/\Delta T$		-0.4		%/ $^{\circ}\text{C}$	
Peak Wavelength	$T_A=0$ to 70°C	λ_p	840		860	nm	
λ_p Temperature Variation	$I_F=6.5\text{mA}$	$\Delta\lambda_p/\Delta T$		0.06		nm/ $^{\circ}\text{C}$	
RMS Spectral Bandwidth	$T_A=0$ to 70°C	$\Delta\lambda$			0.4	nm	
Laser Forward Voltage	$I_F=6.5\text{mA}$	V_F	1.6	1.8	2.2	V	
Laser Reverse Voltage	$I_F=6.5\text{mA}$	V_R	5	10		V	
Rise/Fall Time	$I_R=10\mu\text{A}$	T_R T_F			40 40	ps	4
Relative Intensity Noise	Bias above threshold 20%-80%	RIN_{12}			-130	dB/Hz	5
Series Resistance	$I_F=6.5\text{mA}$	R	41	60	75	Ohms	
Series Resistance Temperature Variation	$I_F=6.5\text{mA}$	$\Delta R/\Delta T$		-0.2		%/ $^{\circ}\text{C}$	
Total Capacitance	$I_F=6.5\text{mA}$	C_T			0.5	pF	6
Encircled Flux Diameter	$I_F=6.5\text{mA}$	EF					7
Photodiode Parameters	Test Condition	Symbol	Min.	Typ.	Max.	Units	Notes
Monitor Current	$P_{OC}=0.6\text{mW}$, $V_R=3\text{V}$	I_{PD}	50	150	300	μA	
Monitor Current Temperature Variation	$P_{OC}=0.6\text{mW}$ $T_A=0$ to 70°C	$\Delta I_{PD}/\Delta T$		0.0		%/ $^{\circ}\text{C}$	
Tracking Ratio Variation (Open Bore)	$P_{OB}=-2.5\text{dBm}$ $T_A=0$ to 70°C	ΔTR	-0.5		+0.5	dB	
Dark Current	$P_{OC}=0\text{mW}$, $V_R=3\text{V}$	I_{DARK}			20	nA	
PD Reverse Voltage	$P_{OC}=0\text{mW}$, $I_R=10\mu\text{A}$	BVR_{PD}	30	115		V	8
PD Capacitance	$V_R=0\text{V}$, Freq=1MHz $V_R=3\text{V}$, Freq=1MHz	C_{PD}		75 40	100 55	pF	

Notes:




1. PO_PCT is defined as the ratio of the coupled power into a 50/125 micron fiber to the total power output from the optical front end as measured on a large area detector.
2. Operation outside of the specified range may result in the threshold current exceeding the maximums defined in the electro-optical characteristics table. DITH is the maximum deviation from the 25°C value.
3. Slope efficiency is defined as $\Delta PO/\Delta IF$ at a total power output of 0.6mW. Slope efficiency is intentionally lowered to the value shown by attenuation.
4. Rise and fall times are sensitive to drive electronics. Rise and fall times are measured 20%-80% using a 1GHz square wave AC coupled to the VCSEL using a bias-T. The DC current is adjusted to achieve a minimum OMA of -4dBm. Corrections are made for finite detector bandwidth.
5. RIN_{12} is measured using the OMA technique with 12dB return.
6. Total capacitance is measured with the VCSEL forward biased using a Network analyzer at 1GHz.
7. Encircled flux is measured per TIA-455-203.
8. To prevent VCSEL damage, short the VCSEL anode and cathode during BVR testing

III. Typical Performance Curves

RMS Spectral Width is defined and measured using TIA-455-127

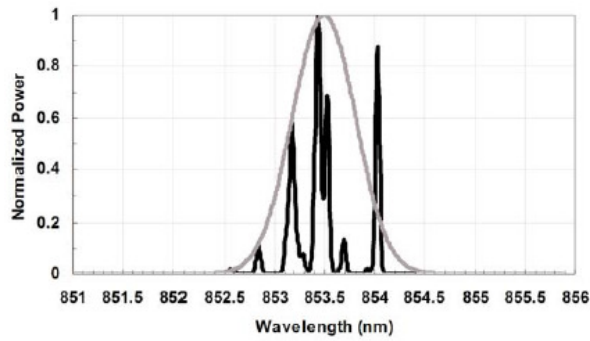

Threshold Current vs. Temperature: Threshold current varies parabolically with temperature; thus it can be nearly constant for a limited temperature range.

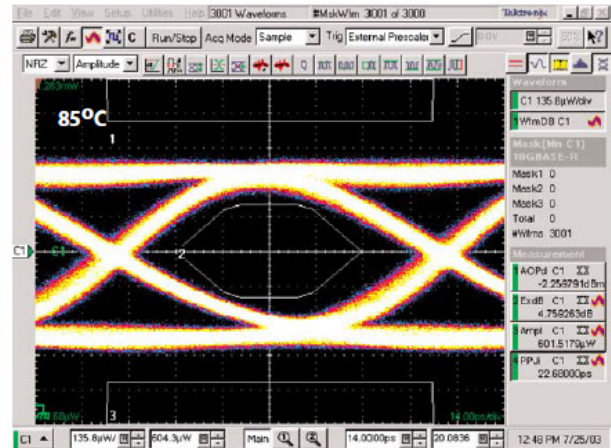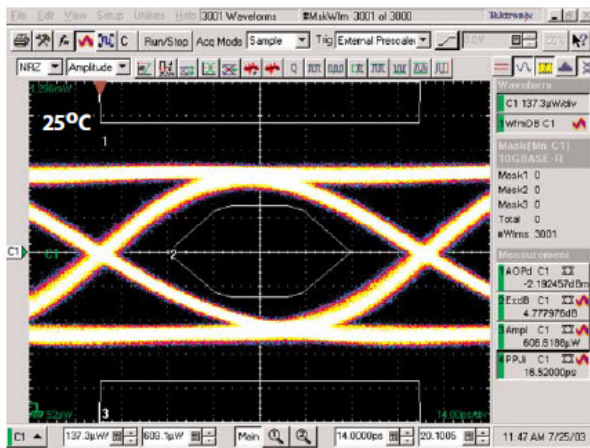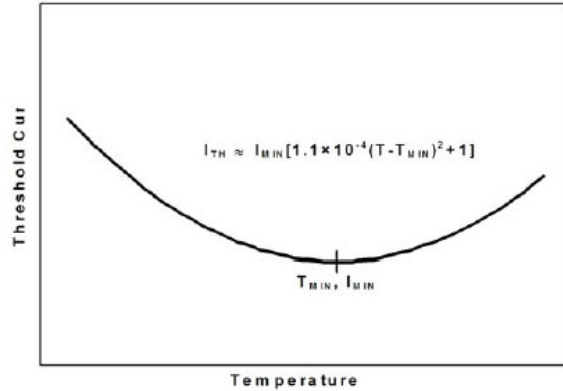

IV. Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Units	Ref.
Case Operating Temperature	T _{op}	0		85	°C	
Storage Temperature	T _{sto}	-40		85	°C	


V. Regulatory Compliance

Feature	Agency	Standard	Certificate Number
Laser Eye Safety	FDA/CDRH	CDRH 21 CFR 1040 and Laser Notice 50	9521487






Copies of the referenced certificates are available at Finisar Corporation upon request.

VI. Mechanical Specifications




PIN	Description
1	PDK
2	GND
3	LDA
4	LDK
5	GND
6	PDA

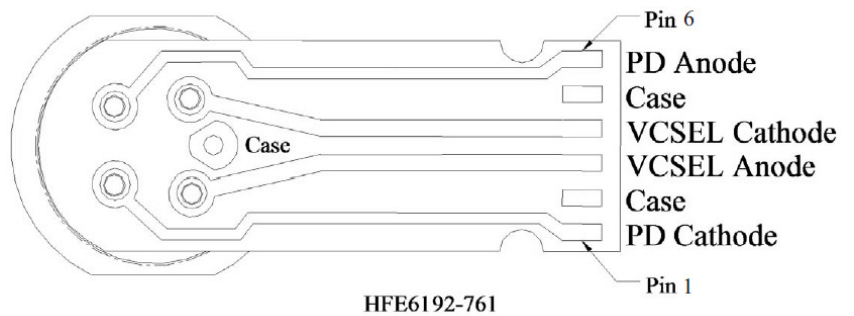

LC TOSA
All dimensions in mm

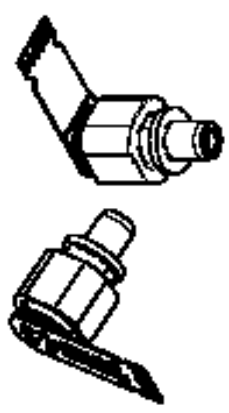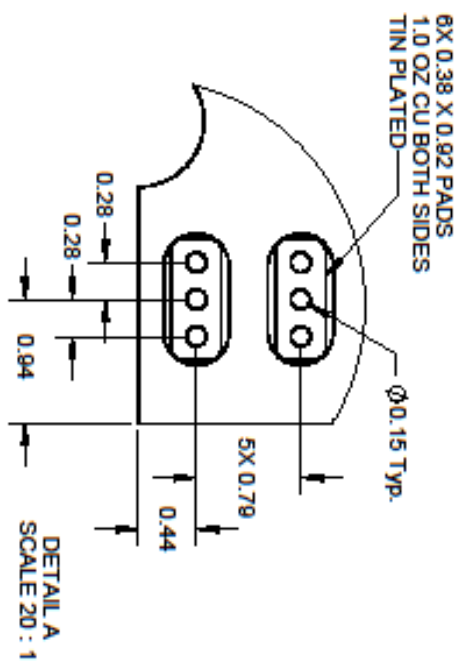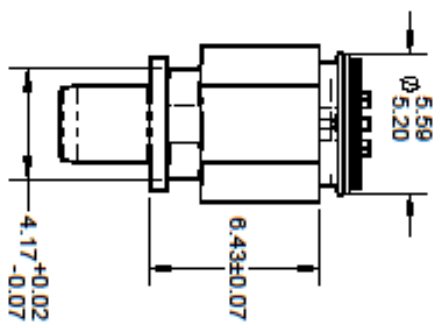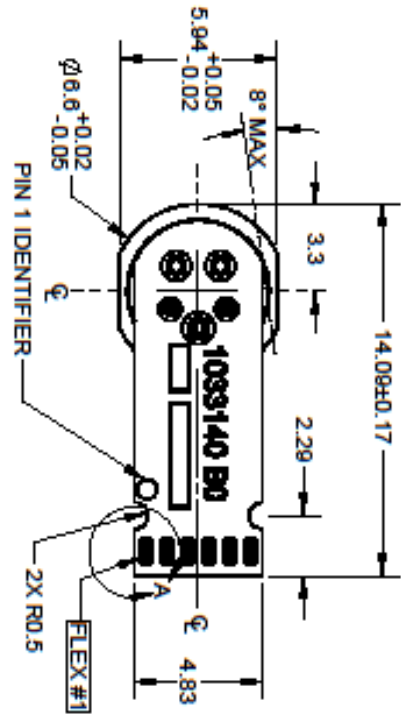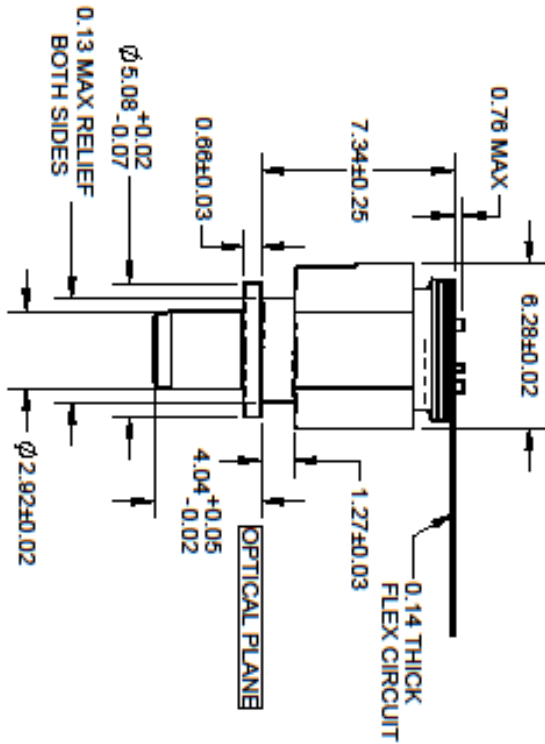

SC TOSA
All dimensions in mm

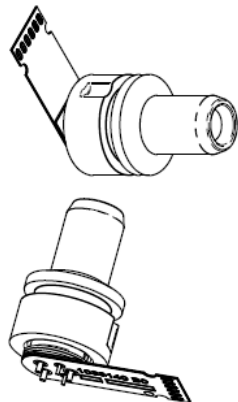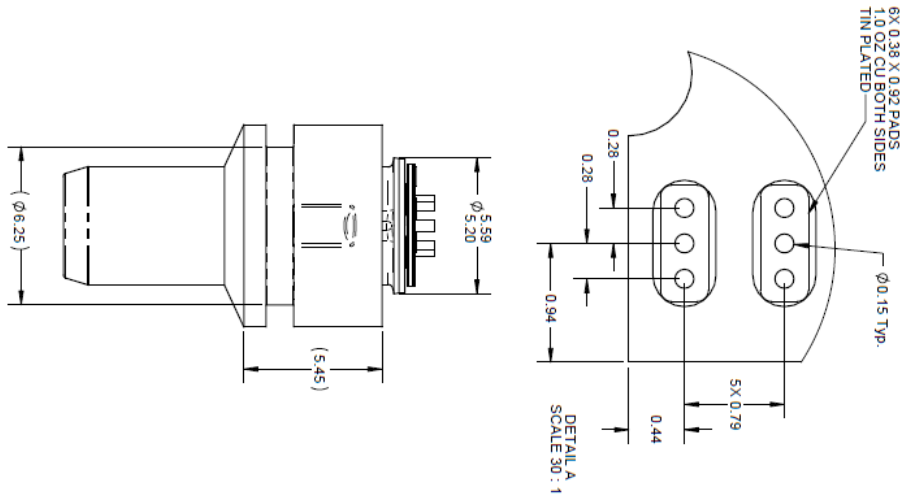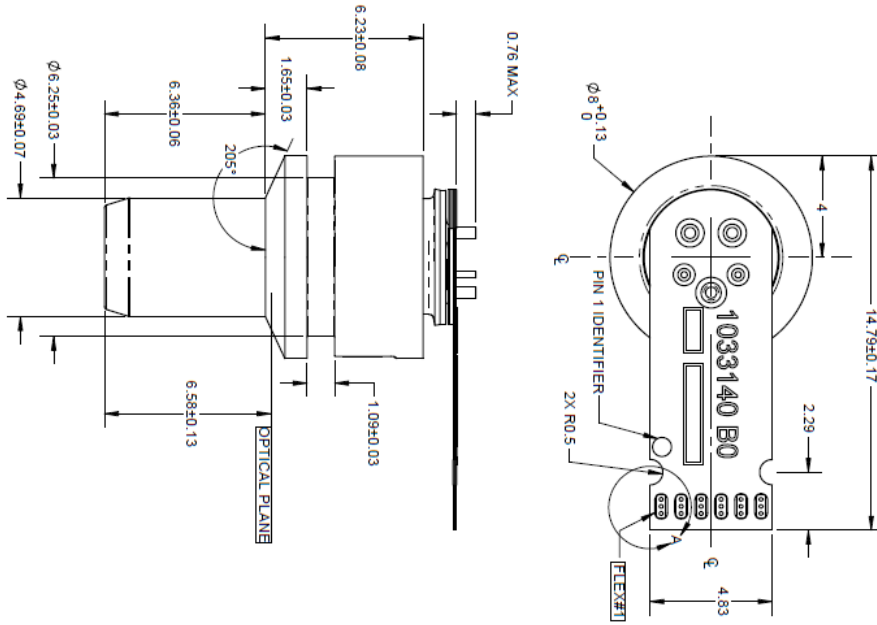

VII. Revision History

Revision	Date	Description
B00	8/14/2014	<ul style="list-style-type: none">• Changed to Finisar format
B01	12/3/2014	<ul style="list-style-type: none">• Changed limits for Vf and SE (Vf max reduced to 2.2V and SE min raised to 0.06)

VIII. For More Information

Finisar Corporation
1389 Moffett Park Drive
Sunnyvale, CA 94089-1133
Tel. 1-408-548-1000
Fax 1-408-541-6138
sales@finisar.com
www.finisar.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Finisar:

[HFE6392-761](#) [HFE6192-761](#)