

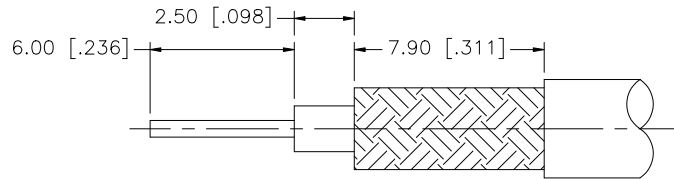


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/13/00	—	INITIAL RELEASE
A	02/25/08	—	UPDATE DRAWING FORMAT
B	12/07/08	—	ADD CRIMP NOTES/ REMOVE "BULKHEAD" FROM PART DESCRIPTION

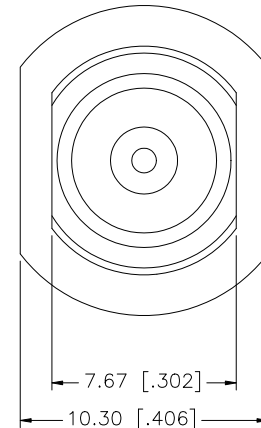

RECOMMENDED CABLE
STRIPPING DIM'S

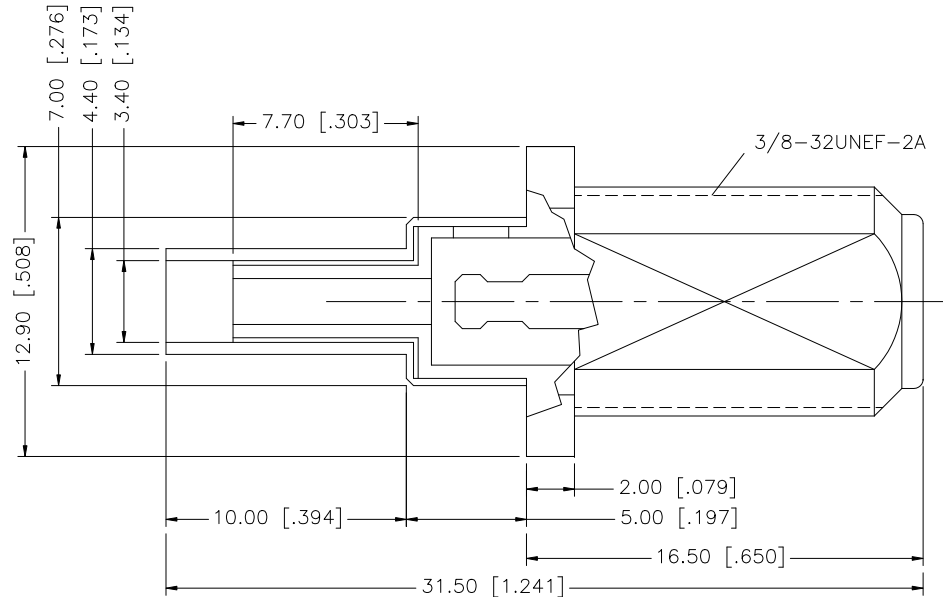

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .151" [3.83]
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	12/07/08							
7						CHECKED									
6							ISSUED				PART DESCRIPTION F CRIMP JACK (FOR RG–179 DOUBLE BRAID CABLE)				
5	FERRULE	BRASS	TIN LEAD	1			SHEET	1 OF 1							
4	INSULATOR	P.P.	NATURAL	1						PART NO. 222167					
3	CONTACT PIN	BER. COPPER	BRT. TIN	1						DWG. NO. 222167.DWG					
2	INSULATOR	P.P.	NATURAL	1						REV. B		SIZE A		SCALE NA	
1	BODY	BRASS	TIN LEAD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:/222/222167.DWG									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[222167](#)