

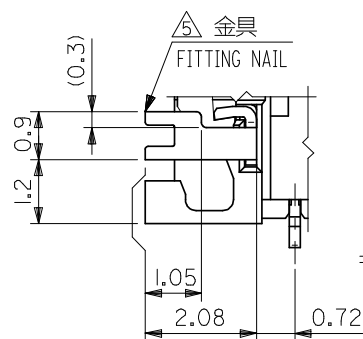
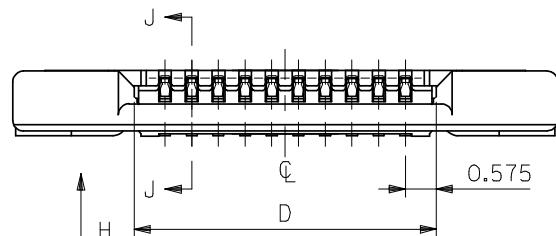


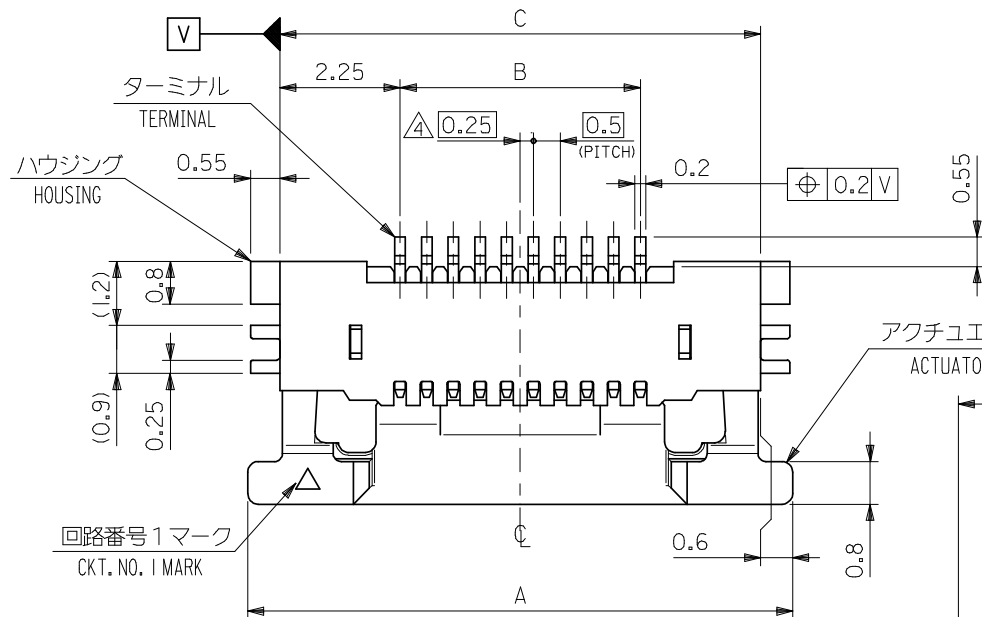

VIEW H

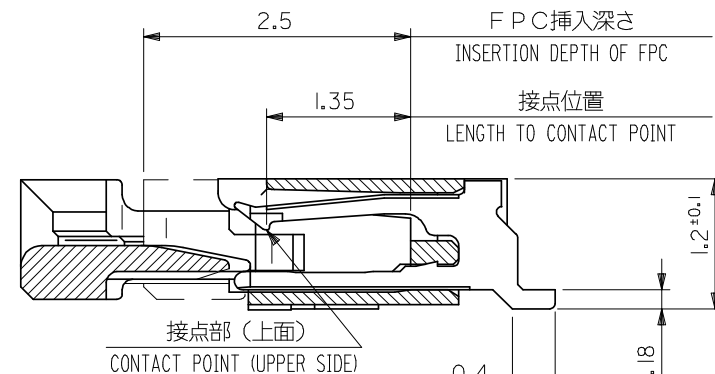

SECT. J-J
SCALE 20:1

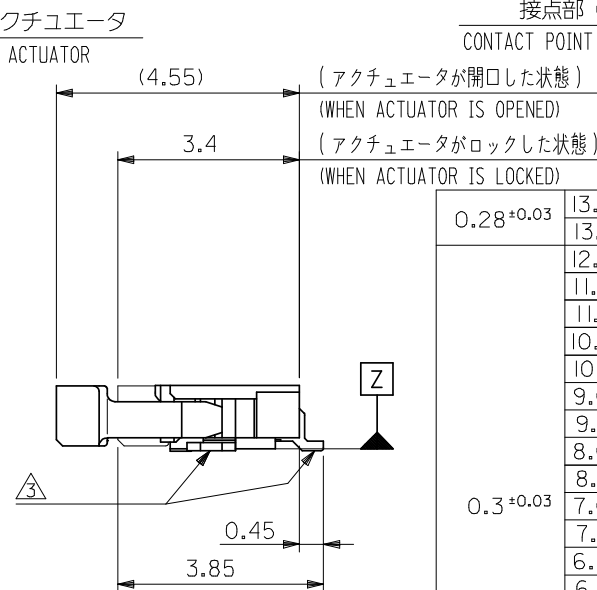


TABLE 15. LOCKED							
0.28 ^{+0.03}	13.65	17	12.5	18.2	54550-2694	54550-26 19	26
	13.15	16.5	12.0	17.7	54550-2594	54550-25 19	25
0.3 ^{+0.03}	12.65	16	11.5	17.2	54550-2494	54550-24 19	24
	11.65	15	10.5	16.2	54550-2294	54550-22 19	22
	11.15	14.5	10	15.7	54550-2194	54550-21 19	21
	10.65	14	9.5	15.2	54550-2094	54550-20 19	20
	10.15	13.5	9	14.7	54550-1994	54550-19 19	19
	9.65	13	8.5	14.2	54550-1894	54550-18 19	18
	9.15	12.5	8	13.7	54550-1794	54550-17 19	17
	8.65	12	7.5	13.2	54550-1694	54550-16 19	16
	8.15	11.5	7	12.7	54550-1594	54550-15 19	15
	7.65	11	6.5	12.2	54550-1494	54550-14 19	14
	7.15	10.5	6	11.7	54550-1394	54550-13 19	13
	6.65	10	5.5	11.2	54550-1294	54550-12 19	12
	6.15	9.5	5	10.7	54550-1194	54550-11 19	11
	5.65	9	4.5	10.2	54550-1094	54550-10 19	10
	5.15	8.5	4	9.7	54550-0994	54550-09 19	9
	4.65	8	3.5	9.2	54550-0894	54550-08 19	8
	4.15	7.5	3	8.7	54550-0794	54550-07 19	7
	3.65	7	2.5	8.2	54550-0694	54550-06 19	6
	3.15	6.5	2	7.7	54550-0594	54550-05 19	5
	2.65	6.0	1.5	7.2	54550-0494	54550-04 19	4

THICKNESS OF FPC	D	C	B	A	EMBOSSSED TAPE	製品番号	極数
					ORDER No. オーダー番号	MATERIAL No.	Ck+
DIMENSION STYLE MM ONLY			SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		

REVISED		EC NO: J2008-4048		2008/06/13		DRWN:MWABE1		2008/06/16		CHKD:THARYAWA		2008/06/16		APPR:NUKITA		DESCRIPTION		54550-**19		MODEL No.		THICKNESS		D		C		B		A		PROCESSING		ORDER No. オーダー番号		MATERIAL No.		CK1	
														GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY				SCALE ---		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION													
														10 UNDER				± 0.2		DRAWN BY		DATE		TITLE 0.5 FPC CONN ZIF HOUSING ASSY SMT RA UPPER CONT -LEAD FREE-		MOLEX INCORPORATED													
														10 OVER 30 UNDER				± 0.25		CHECKED BY		DATE																	
														30 OVER				± 0.3		APPROVED BY		DATE																	
												ANGULAR ±3 °				MATERIAL NO.				DOCUMENT NO.				SHEET NO.															
												DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3				SEE TABLE				SD-54550-019				1 OF 2											
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																							

F

E

D

C

B

A

F

E



D

C

B


A

10 9 8 7 6 5 4 3 2 1

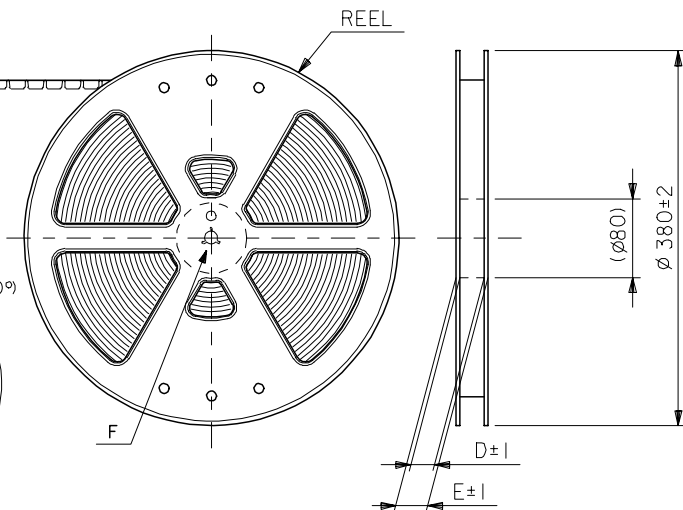


NOTES

- 製品詳細寸法については図面 54550-**-19 を参照下さい。
RE DETAILED DIMENSION, SEE 54550-**-19
- 梱包数量：3000個/リール
NUMBER OF CONNECTORS：3000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

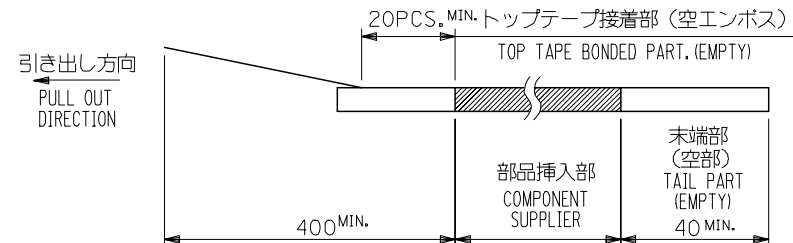


- トップテープの剥離強度：0.1N ～ 1.3N (10gf ～ 130gf)
(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1N ～ 1.3N (10gf ～ 130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.




- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE)：ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE)：PET, PE, PEF
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

- 本製品は 54550-**-90 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 54550-**-90.

REVISED EC NO: J2005-1954 DRAWN: NABEI CHKD: K. TOJO APPR: NUKITA		DESCRIPTION 2005/01/13 2005/01/14 2005/01/18		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		54550-**94		MODEL No.			
						MM ONLY		---		DESIGN UNITS		THIRD ANGLE			
										METRIC		◎ □ PROJECTION			
				10 UNDER		±0.2		DRAWN BY		DATE		0.5 FPC CONN ZIF HSG EMBSTP PKG -LEAD FREE-			
				10 OVER 30 UNDER		±0.25		CHECKED BY		DATE					
				30 OVER		±0.3		APPROVED BY		DATE		MOLEX INCORPORATED			
ANGULAR		±3 °		M. SASAO		'03/12/22									
				MATERIAL NO.		DOCUMENT NO.				SHEET NO.					
				DRAFT WHERE APPLICABLE		SEE CHART		SD-54550-020				1 OF 4			
				MUST REMAIN											
				WITHIN DIMENSIONS											
						SIZE									
						A3									

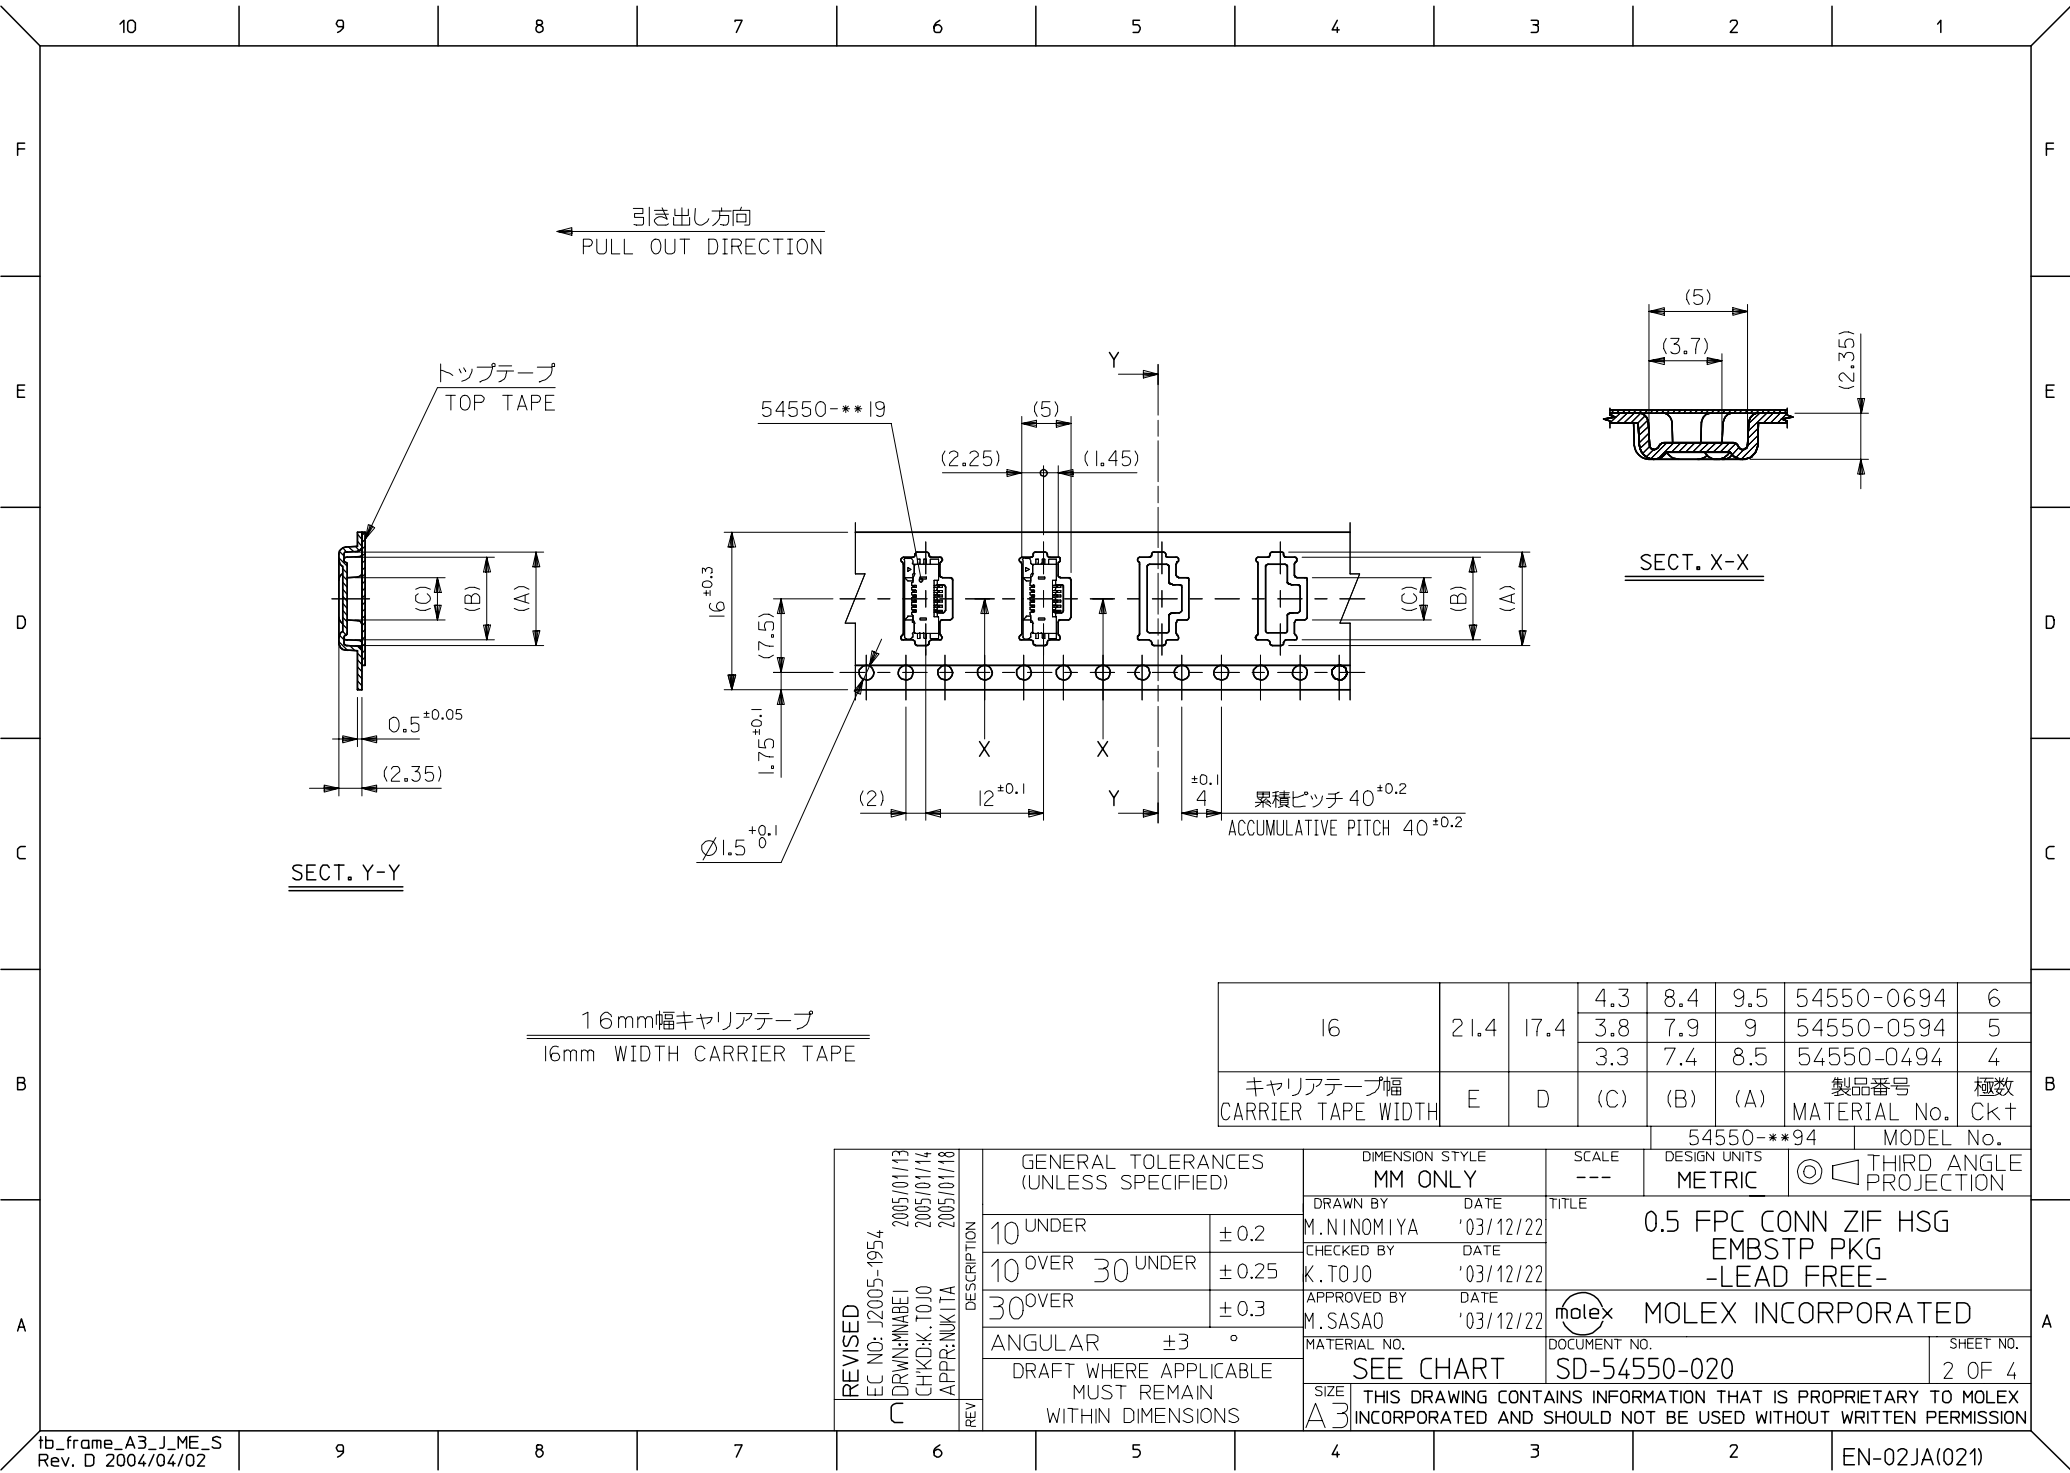

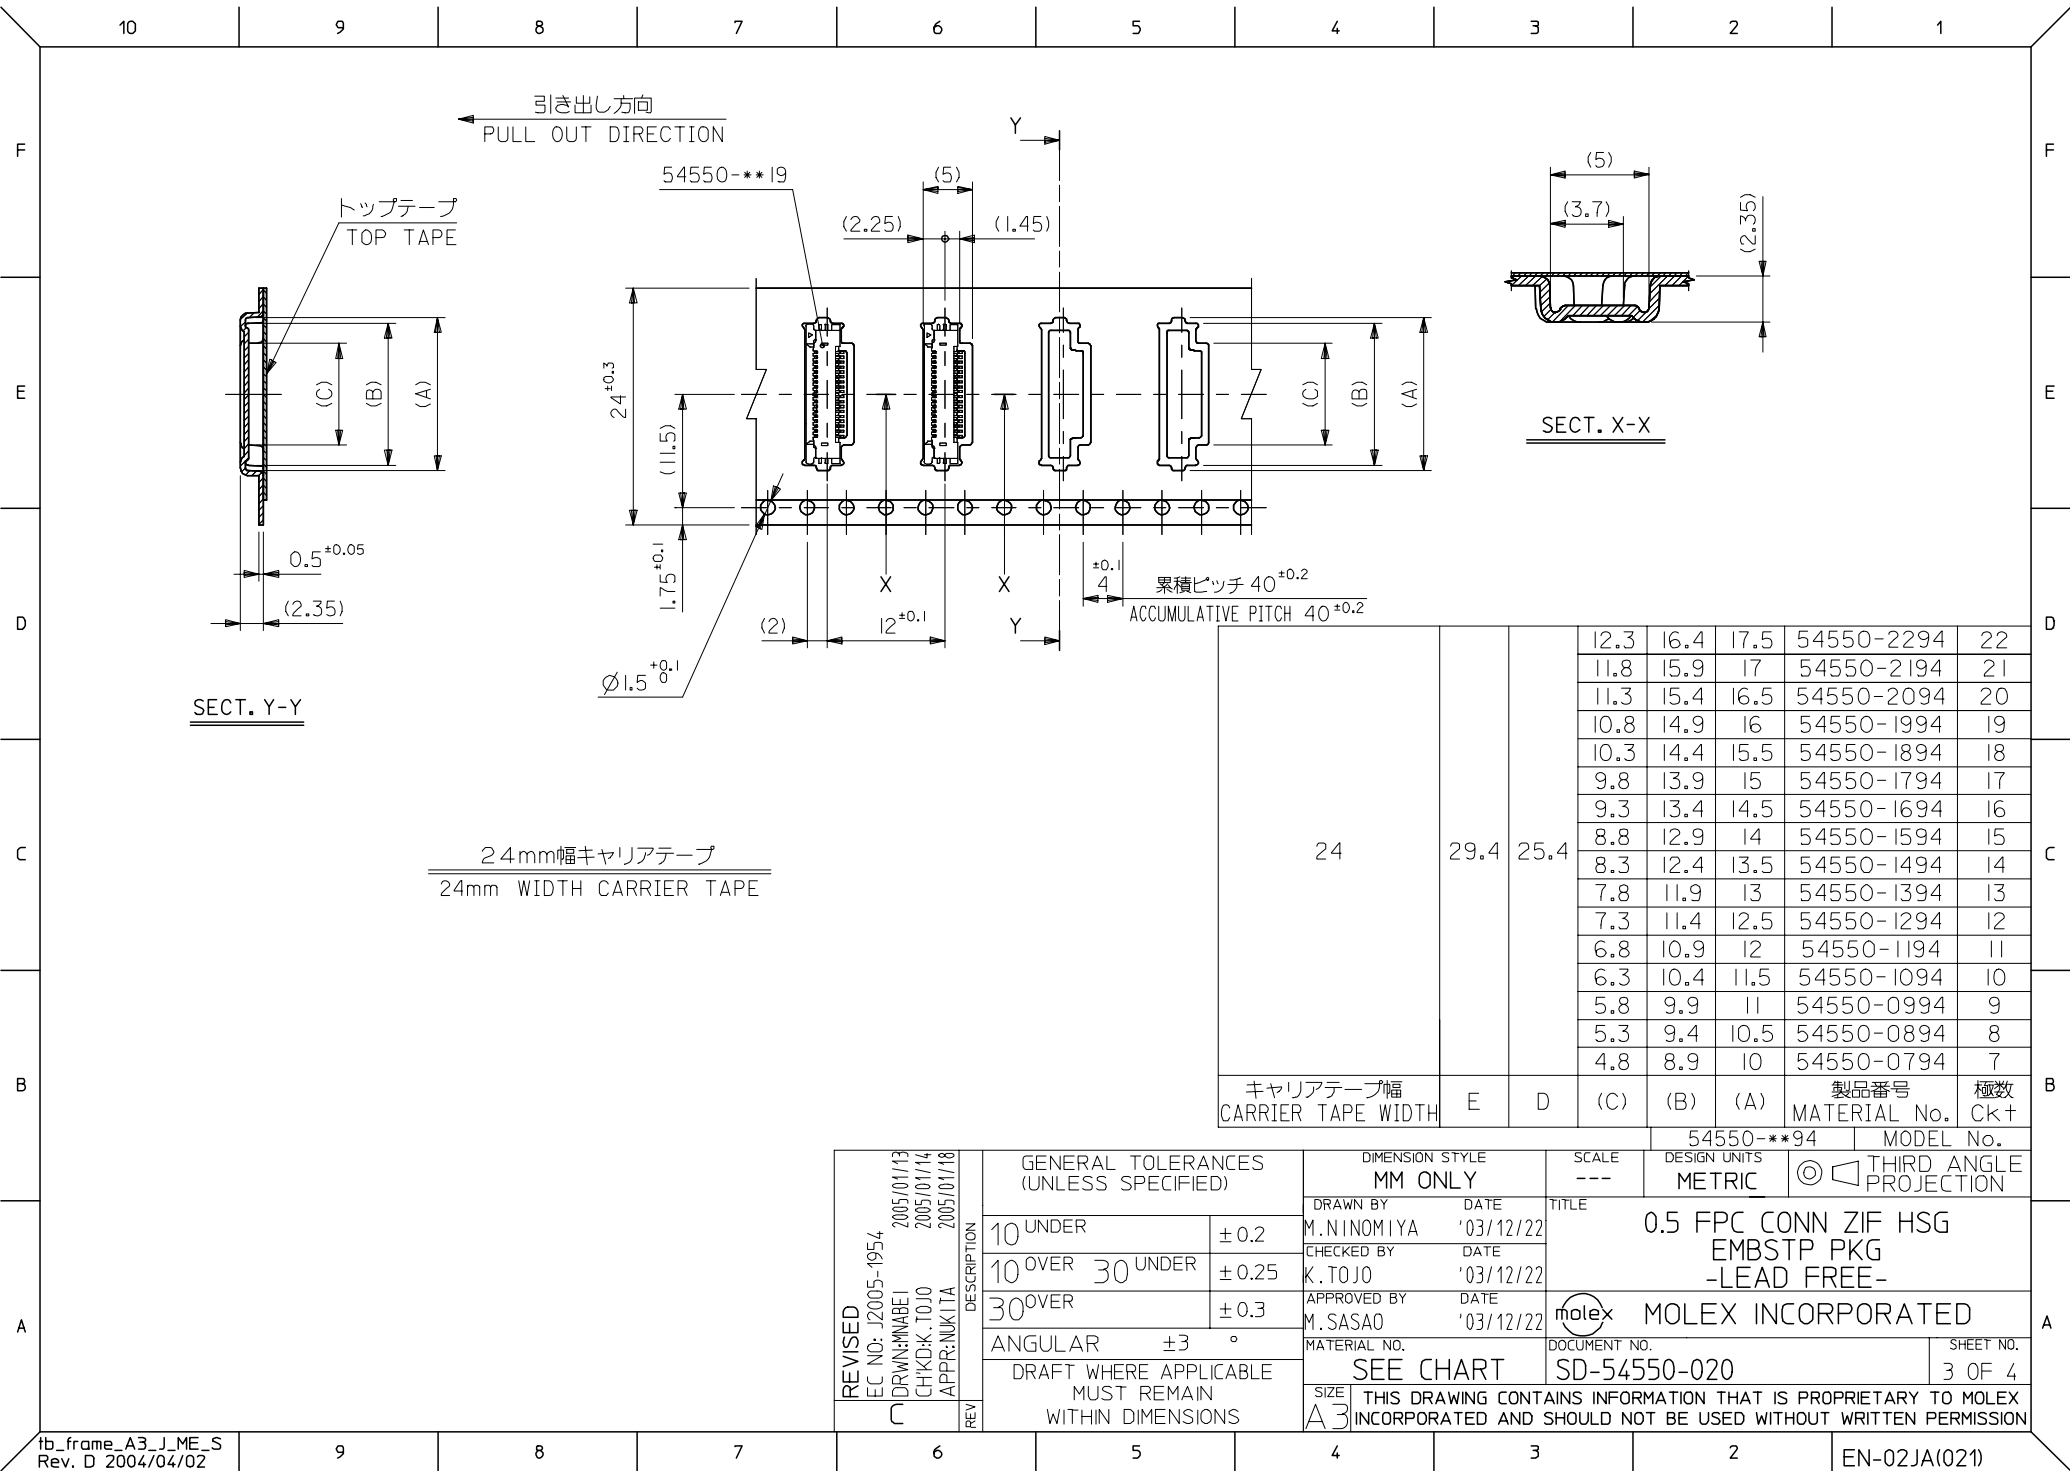

10

9

8

7

6

5

4

3

2

1


引き出し方向
PULL OUT DIRECTION

54550-**-22



(2.25)

(5)

(1.45)

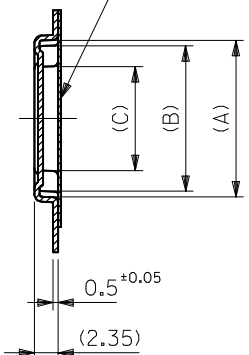トップテープ
TOP TAPE

SECT. Y-Y

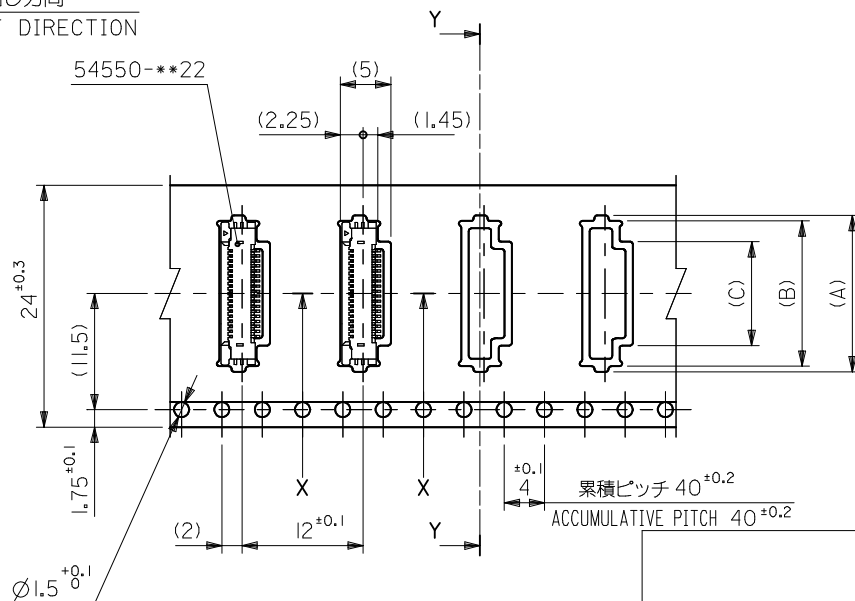

SECT. X-X

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

24	29.4	25.4	12.3	16.4	17.5	54550-2233	22
			11.8	15.9	17	54550-2133	21
			11.3	15.4	16.5	54550-2033	20
			10.8	14.9	16	54550-1933	19
			10.3	14.4	15.5	54550-1833	18
			9.8	13.9	15	54550-1733	17
			9.3	13.4	14.5	54550-1633	16
			8.8	12.9	14	54550-1533	15
			8.3	12.4	13.5	54550-1433	14
			7.8	11.9	13	54550-1333	13
			7.3	11.4	12.5	54550-1233	12
			6.8	10.9	12	54550-1133	11
			6.3	10.4	11.5	54550-1033	10
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	5.8	9.9	11	54550-0933	9
			5.3	9.4	10.5	54550-0833	8
			4.8	8.9	10	54550-0733	7
			製品番号 MATERIAL No.				
54550-**33					MODEL No.		

RELEASED EC NO: J2013-1014 DRWN: NKONDO 2012/09/13 CHKD: TAKAHASHI 2012/09/13 APPR: KMORIKAWA 2013/03/15	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY NKONDO	DATE 2012/09/13	TITLE EMBOSS TAPE PACKAGED FOR 0.5MM FPC CONN ZIF R/A HOUSING ASSY molex				
		10 OVER 30 UNDER	± 0.25	CHECKED BY TAKAHASHI	DATE 2012/09/13					
		30 OVER	± 0.3	APPROVED BY KMORIKAWA	DATE 2013/03/15					
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-54550-076		3 OF 4			
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

9

8

7

6

5

4

3

2