
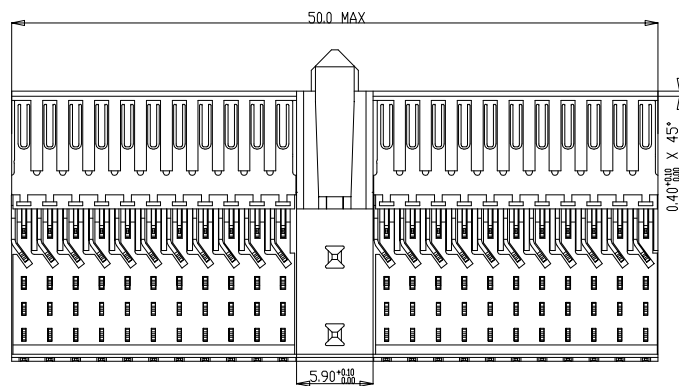
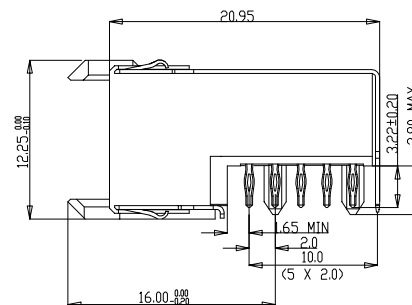


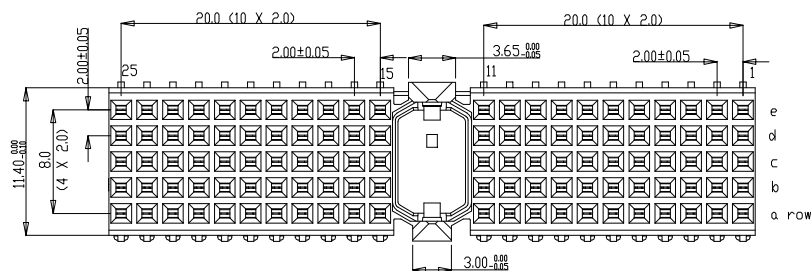

PERFORMANCE CHARACTERISTICS


1.5 A AT 20°C (FULLY LOADED)
CURRENT RATING 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

1. LEAD FREE INDICATOR : LF- LEAD FREE
2. THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
P.C.B.-HOLE

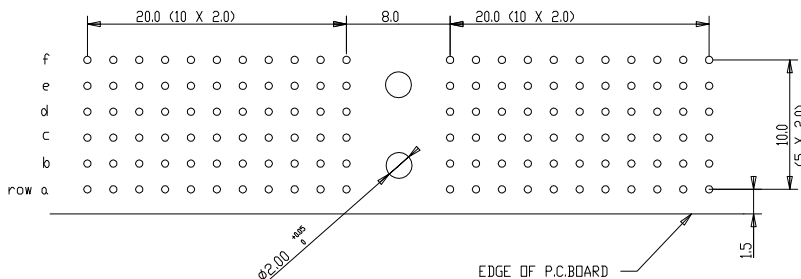

Material				Spec ref			
Mat code				tolerance			
Heat treat				projection			
Plating/Finish				MM			
rev	ecn no	dr	date	Dr	4	2	92
A	000000	KN	14-9-92	Eng	J.V.B		
B	0005-0278	Guo.M	03/08/95	Chr			
C	0007-0362	Keson	05/09/97	Appr			
D	0008-0010	NZ	03/02/99				
-	-	-	-				
-	-	-	-				
05	REC 9.2546	RN	11/06/01				
Title				Product Family			
Title				Model Name			
Title				Model Revision			
Title				REL Level			
Title				size			
Title				Scale			
Title				Rev.			
Title				D			
Title				sheet 1 of 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R01PA5101N9LF](#)