
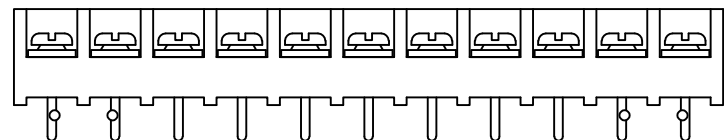

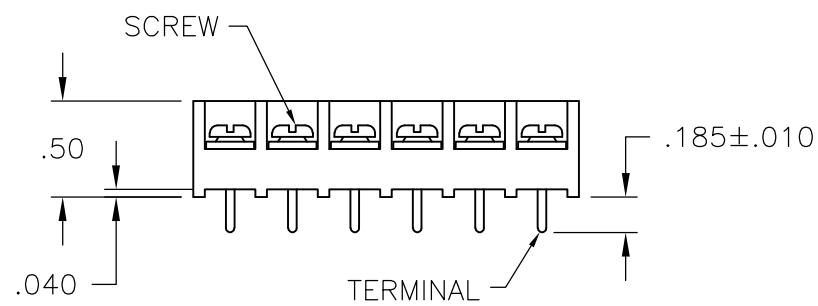


MATERIALS:
HOUSING: POLYAMIDE, UL94V-0
TERMINALS: COPPER ALLOY, TIN PLATED
SCREWS: STEEL, ZINC PLATED, EXCEPT WHERE NOTED.


ELECTRICAL:
RATING: 20A, 150V(300V LIMITED RATING)
UL & CSA.

MECHANICAL:
WIRE RANGE: 12 AWG – 22 AWG
MAXIMUM TIGHTENING TORQUE: 7 IN-LBS.


- | | |
|---|--|
| 1 | SCREWS ARE ALL BOTTOMED, NO RUNNING TORQUE. |
| 2 | PERMANENT WHITE LETTERING. |
| 3 | SCREWS ARE NICKEL PLATED BRASS. |
| 4 | PRELIMINARY PART NUMBER. |
| 5 | PCB RETENTION FEATURE. |
| 6 | OBsolete PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI |

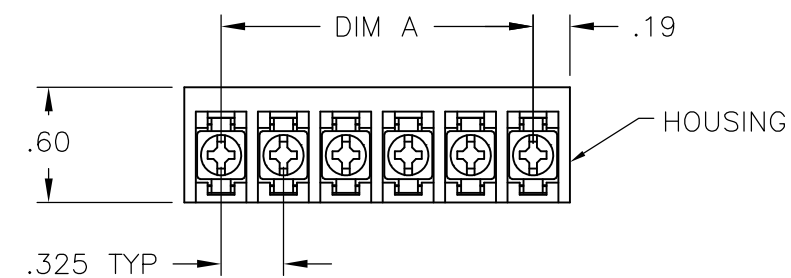

2-796607-1

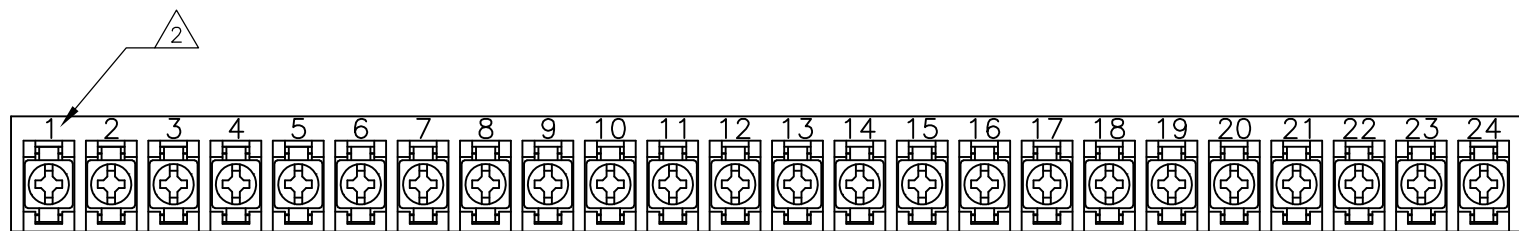

4-1437649-0

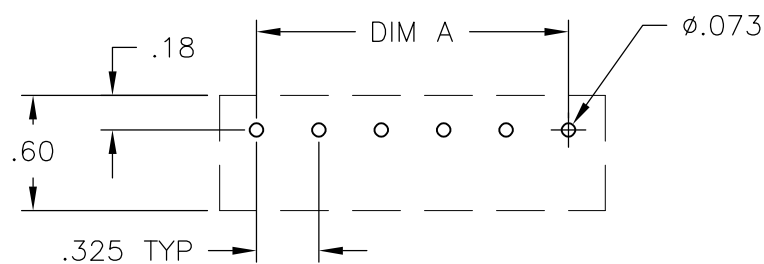

RECOMMENDED HOLE LAYOUT
TOLERANCE ± 0.002 , UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL 27JUN02		TE Connectivity				
		CHK S. YODER 7/9/02						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 4PCV-XX-006 ASSEMBLY				
		APVD S. YODER 7/9/02						
		PRODUCT SPEC —						
		APPLICATION SPEC —						
MATERIAL —		FINISH —		SIZE A2	CAGE CODE 00779	DRAWING NO G-5-1437648-7	RESTRICTED TO —	
		WEIGHT —						
		CUSTOMER DRAWING				SCALE NTS	SHEET 1 of 1	REV L4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4PCV-24-006](#)